

DOCUMENT RESUME

ED 203 097

CE 029 156

TITLE Curriculum Guide. Electricity: Residential Wiring. Secondary Schools.

INSTITUTION Trust Territory of the Pacific Islands Dept. of Education, Saipan.

SPONS AGENCY Office of Vocational and Adult Education (ED), Washington, D.C.

PUB DATE Aug 87

CONTRACT 300-79-0436

NOTE 276p.: For related documents see CE 029 155-160.

EDRS PRICE MF01/PC12 Plus Postage.

DESCRIPTORS Curriculum Guides; *Decision Making Skills; *Electrical Systems; Electricians; *Electricity; *Electromechanical Technology; *Inservice Teacher Education; *Job Skills; Secondary Education; Teaching Methods; Technical Education

IDENTIFIERS *House Wiring

ABSTRACT

This curriculum guide on residential wiring for secondary students is one of six developed for inservice teachers at Marianas High School in Saipan. The guide provides the rationale, description, goals, and objectives of the program; the program of studies and performance objectives by levels; samples of lesson plans for effective delivery of instruction; and a listing of references. Concepts covered include fundamental concepts of electricity, performing basic experiments and manipulative skills involved in electrical occupations, principles and practices related to or applied to residential wiring, theoretical and technical instructions to further develop judgment and decision-making skills, electrical applications and installations directly related to residential wiring, and job-entry skills. Appended materials include job descriptions and tasks, sample lesson plans, sample attendance and progress charts, handouts, safety posters, and instructional resources. (CT)

* Reproductions supplied by EDRS are the best that can be made *
 * from the original document. *

ED203097

CURRICULUM GUIDE

Electricity: Residential Wiring Secondary Schools

This activity was supported in part by the U.S. Department of Education, Office of Vocational and Adult Education project titled, "Vocational Education Personnel Development in the Pacific Basin," Contract No. 300 790 436. However, opinions expressed herein do not necessarily reflect the position or policy of the U.S. Department of Education and no official endorsement by the U.S. Department of Education should be inferred.

U.S. DEPARTMENT OF HEALTH,
EDUCATION & WELFARE
NATIONAL INSTITUTE OF
EDUCATION

THIS DOCUMENT HAS BEEN REPRODUCED EXACTLY AS RECEIVED FROM THE PERSON OR ORGANIZATION ORIGINATING IT. POINTS OF VIEW OR OPINIONS STATED DO NOT NECESSARILY REPRESENT OFFICIAL NATIONAL INSTITUTE OF EDUCATION POSITION OR POLICY.

"PERMISSION TO REPRODUCE THIS
MATERIAL HAS BEEN GRANTED BY

Herman B. Colonera
Ira E. Ahopito

TO THE EDUCATIONAL RESOURCES
INFORMATION CENTER (ERIC)."

August, 1980

STATE BOARDS FOR VOCATIONAL EDUCATION

Commonwealth of the Northern Marianas

Lorenzo LB. Cabrera, Chairperson
P.O. Box 514
Saipan, CM 96950

Joaquin S. Maglona, Vice-Chairperson
P.O. Box 997
Rota, CM 96950

Felicitas Abraham
P.O. Box 190 CHRB
Saipan, CM 96950

Sr. Mary Louis Balzarini, MMB
P.O. Box 136
Saipan, CM 96950

Dr. Ignacio Dela Cruz
P.O. Box 677
Saipan, CM 96950

Jesus Fiasao
P.O. Box 879
Saipan, CM 96950

Estanislao Hocog
c/o Mayor's Office
Tinian, CM 96950

Florin Mendiola-Hofschneider
San Jose Village
Tinian, CM 96950

Frankie Muna
P.O. Box 272
Saipan, CM 96950

Loran Koprowski
Executive Officer
Dept. of Education
Saipan, CM 96950

Michael White
Legal Counsel
P.O. Box 222 CHRB
Saipan, CM 96950

Trust Territory of the Pacific Islands

David Ramarui, Chairperson
Director, Bureau of Education
Saipan, CM 96950

Government of the Marshalls

Ms. Marie Madison
Public Service Commission
Majuro, Marshall Islands 96960

Government of Palau

Rev. Billy Kuartei, Vice-Chairperson
Emmaus High School
P.O. Box 4000
Koror, Palau 96940

Federated States of Micronesia

Kosrae

Mr. Lyndon Abraham
State Finance Officer
Lelu, Kosrae 96944

Ponape

Mr. Damien Sohl
Department of Education
Kolonias, Ponape 96941

Truk

Mr. Masasinge Eis
Department of Education
Moen, Truk 96942

Yap

Mr. John B. Rulmal
c/o P.O. Box 6157
Tamuning, Guam 96911

*Cover designed by: Jesus S. Pua
Instructional Media Specialist*

*Lenny Diaz
Agriculture Instructor
Tinian School*


FOREWORD

This document, Curriculum Guide for Electricity (Residential Wiring) is one of several guides developed during the 1980 Summer Session held for in-service teachers at Marianas High School in Saipan. The in-service workshop was made possible through a federal project titled, Vocational Education Personnel Development in the Pacific Basin, under Section 135 of Title II of the Education Amendment Act of 1976 (P. L. 94-482).


Experienced teachers and administrators representing the secondary schools of the Commonwealth of the Northern Mariana Islands and the Trust Territory of the Pacific Islands developed the guide to establish curriculum standards for vocational education in their respective school systems. It is hoped that this guide will help teachers and administrators improve instruction as well as establish a base for future curriculum development efforts.

The guide provides the rationale, description, goals and objectives of the program; the program of studies and performance objectives by levels; samples of lesson plans for effective delivery of instruction; and a listing of references, supplies, and equipment.

Constructive comments and recommendations will be appreciated. These should be forwarded to either the Department of Education, Commonwealth of the Northern Mariana Islands or Bureau of Education, Trust Territory of the Pacific Islands, Directors of Vocational Education.



Herman Cabrera
Director, Vocational Education
Department of Education
Commonwealth of the Northern
Mariana Islands



Loren Peterson
Director, Vocational Education
Bureau of Education
Trust Territory of the Pacific
Islands

ACKNOWLEDGMENTS

This curriculum guide for Electricity is the result of the cooperative efforts of many people in the Commonwealth of the Northern Mariana Islands, Trust Territory of the Pacific Islands, University of Hawaii College of Education, and the State of Hawaii. Experienced teachers from the Commonwealth of the Northern Marianas and University of Hawaii personnel, have contributed toward the development of this guide. However, this guide is for both the Commonwealth of the Northern Mariana Islands and the Trust Territory of the Pacific Islands. The following persons are acknowledged as participants, consultants, evaluators, and support staff for the development of this guide.

TEACHERS

Jose C. Camacho
Jorge G. Guevara

Rosiky F. Camacho
Juan S. Pua

CONSULTANT-EVALUATORS

Herman Cabrera, SCVE/CNMI
Dan Hinkfuss, SVES/TRUK
David Ikeda, UH
Frank Kanzaki, UH
Loren Peterson, SDVE/TTPI

Edward Gallant, SVES/YAP
Ruth Hock, UH
Kenneth Kameoka, UH
Lincoln Kumai, UH
Robert Reed, UH

SUPPORT STAFF

Sue T. Ikertang/TTPI
Connie Sablan/CNMI
George Sablan/CNMI

INTRODUCTION

Rationale

The dependence on electrical power by our technological society is so evident that there is very few individuals who can imagine a world without electricity. And yet, the average person is basically illiterate in understanding this vital power source. The result is that many people do not realize the significance and the implications of electrical power in their daily lives as well as in the career opportunities that are available to them.

In the Commonwealth of the Northern Mariana Islands (CNMI) and the Trust Territory of the Pacific Islands (TTPI), electrical power play a vital role in their socioeconomic development plans. The large volume of construction that is currently taking place and also those in the projected plans will require additional electrical power and skilled electrical workers.

In a report prepared by Robert Nathan Associates of Washington, D.C., 1977, states that:

The large volume of construction that is indicated in the Socioeconomic Plan will strain the capabilities of both the local construction industry and the government. Of these two, the governmental constraint is more likely to be serious and longer in duration. Contractors, skilled workers, and building materials can and probably will be imported rapidly enough to make this a temporary constraint, if government capabilities in decision making and regulation of labor permits could be sharply expanded and made more effective.

It is obvious, even from casual observation and inquiry, that there is a lack of local skilled workers. Most of the skill trade workers are imported alien workers.

The Trust Territory Advisory Council for Vocational Education in its 10th Annual Report stated that with the changing emphasis from government to private employment, it is essential that vocational education be the means whereby students in high schools, which has been the principal area for skill development, acquire saleable skills for direct entry into the labor market. The Council encourages vocational administrators, counselors and teachers to recruit in a positive manner those students who would derive the most benefits from these programs.

The Electricity Program is a sequentially developed program to help students explore the fields of electricity as well as to help interested students who have the desire and capabilities with skills, knowledge and attitudes necessary for entry level employment.

With the every increasing use of electrical appliances and equipment, and the number of new dwellings being built in the Marianas and the Trust Territory, it has become evident that the trend towards importing foreign workers will be on the decline if the educational system can provide the industry with trained and skilled workers. This shift will probably add some strength and stability into our economy, as well as providing our youths with the type of employment opportunities that will satisfy their needs as well as the needs of our islands.

In order to insure that our youths are properly trained and prepared for entry level employment in the electrical wiring industry, we have attempted to develop a common curriculum guide that will meet these needs.

This guide will assist the instructor/teacher to present lessons and shop practices in the most appropriate and efficient manner.

Description

This program is a tri-level secondary school curriculum in Electricity, with emphasis in Residential Wiring.

The first level covers the introductory course where the emphasis are on learning the fundamental concepts of electricity, and performing basic experiments and manipulative skills involved in electrical occupations.

The second level covers the principles and practices which are related to or applied to residential wiring. Theoretical, technical, and related instructions are stressed to further develop judgment and decision making skills.

The third and final level, covers electrical applications and installations which are directly related to residential wiring. Job entry skills are stressed during this final course.

Goal

The goals of the program are to provide training through classroom and shop experiences to develop manipulative skills, safety practices, acceptable work habits, and attitudes for the purpose of gainful and

TABLE OF CONTENTS

	<u>PAGE</u>
FOREWORD.....	i
ACKNOWLEDGMENT.....	ii
INTRODUCTION.....	1
PROGRAM OF STUDIES.....	4
COURSE OUTLINE LEVEL I.....	5
COURSE OUTLINE LEVEL II.....	37
COURSE OUTLINE LEVEL III.....	65
APPENDICES.....	82
APPENDIX A JOB DESCRIPTION.....	83
APPENDIX B RESIDENTIAL WIRING TASKS.....	85
APPENDIX C SAMPLE LESSON PLANS.....	87
APPENDIX D SAMPLE ATTENDANCE AND PROGRESS CHARTS....	129
APPENDIX E HANDOUTS.....	142
APPENDIX F SAFETY POSTERS.....	157
APPENDIX G INSTRUCTIONAL RESOURCES.....	160
BIBLIOGRAPHY.....	176
GLOSSARY.....	179

meaningful employment. The program has identified and sequenced a course of study that would be common to a wide range of occupations in the electrical trades cluster.

Objectives

The objectives of this program are as follows:

1. Develop skills and ability for occupational competency.
2. Develop attitudes required for entry level employment and advancement.
3. Develop knowledge and habits to perform tasks safely and efficiently.
4. Develop social traits that would be acceptable in functioning in our society.
5. Assist students in mastering basic literacy skills required to meet job specifications.
6. Provide the industry, community, and nation with a trained work force which will attract and promote economic and industrial development.

Objectives are prescribed so both student and teacher can assess the knowledge, skills, and attitudes gained from this course. By prescribing objectives, both different student characteristics and special needs students can be met using this same guide.

This guide should provide a more effective teaching plan and an accountability system would also be implemented. The basic plan is to train students to acquire saleable/marketable skills to satisfy their needs as well as the needs of the industry, community, and nation.

It should be noted that the success of this program is dependent on the quality of the general education and related courses.

PROGRAM OF STUDIES

COURSE OUTLINE LEVEL I

LEVEL I

A. COURSE TITLE: INTRODUCTION TO ELECTRICITY

B. COURSE DESCRIPTION

This is a one year course that will enable the student to learn about electrical theories, such as voltage, current, and resistance and their relationship to each other. The course covers safety practices, applications of electricity in our daily lives, and the use and care of test instruments.

Practical applications include the use of handtools, test instruments, experimenting, designing, constructing and testing electrical devices and circuits.

C. GOALS

The goals of this course are to introduce the student to the world of electricity and the various opportunities of a career in this broad field. Also to develop skills, knowledge and attitudes that will enhance the student to cope in the highly technological society that we live in today.

D. COURSE OBJECTIVES

1. Appraise the opportunities of a trade in residential wiring and its requirements for employment.
2. Demonstrate habits which are conducive to learning.
3. Explain the importance of practicing safe working habits.
4. Specify the tools most commonly used in the electrical wiring industry.
5. Explain the five sources of electricity.
6. Explain and discuss the distribution system from the power plant to the resident.
7. Solve electrical problems using Ohm's Law.
8. Explain the basic principles of magnetism.
9. Explain the use of three different types of diagrams used in electrical wiring.

10. Install wiring using low voltage equipment.
11. Select the proper scale when utilizing test instruments.
12. Identify commonly used electrical symbols.
13. Demonstrate their ability to use ampacity tables in selecting conductors for general wiring.
14. Select and apply different techniques of splicing conductors.
15. Classify and identify electrical wiring devices and materials.

E. COURSE OUTLINE

*1. Career Orientation

- a. Job Description
- b. Entry level requirement
- c. Job ethics
- d. Working conditions
- e. Job opportunities

*2. Shop Orientation

- a. Shop policy
- b. Introduction to course content
- c. Grading policy
- d. Location of books and references
- e. Shop layout
- f. Location of tools

*3. Safety

- a. Safety program
- b. First aid
- c. Ventilation and lighting
- d. Material handling and storage
- e. Location of fire extinguisher

*4. Use and Care of Electrical Wiring Tools

- a. Screwdriver
- b. Phillips screwdriver
- c. Knife
- d. Diagonal pliers
- e. Long nose pliers
- f. Side cutting pliers/Lineman's pliers
- g. Channel lok pliers

- h. Torpedo level
- i. Tape rule
- j. Folding rule
- k. Chisels
- l. Hammer
- m. Keyhole saw
- n. Wire stripper
- o. Hack saw
- p. Vise grip pliers
- q. Tool pouch
- r. Fish tape
- s. Portable electric drill

5. Sources of Electricity

- a. Friction
- b. Chemical
- c. Magnetism
- d. Pressure
- e. Light
- f. Heat

6. Electrical Distribution

- a. Power plant
- b. Transmission lines
- c. Distribution lines
- d. Services

*7. Basic Electricity DC

- a. Electron Theory
- b. Atomic Theory
- c. Batteries
- d. Conductivity of materials
- e. Ohm's Law
- f. Series circuit
- g. Parallel circuit
- h. Combination circuit
- i. Watts/power

8. Magnetism

- a. Laws of magnetism
- b. Electromagnetism
- c. DC generator

*9. Electrical Diagrams

- a. Schematic diagram

- b. Wiring diagram
- c. One-line diagram

***10. Low Voltage Circuits**

- a. Use of low voltage circuits
- b. Procedures in wiring signal circuits
- c. Operation of signal devices
- d. Signal circuit equipment

***11. Use and Care of Test Instruments and Equipment**

- a. Handling and transporting meters
- b. Zeroing meters
- c. Scale setting
- d. Identifying polarity
- e. Measuring voltage
- f. Measuring current
- g. Measuring resistance
- h. Proper storing

***12. Identifying Electrical Symbols**

- a. Single pole switch
- b. Double pole switch
- c. Three-way switch
- d. Four-way switch
- e. Duplex receptacle
- f. Special purpose receptacle
- g. Split circuit receptacle
- h. Clock outlet
- i. Floor outlet
- j. Lighting outlet
- k. Lighting panel
- m. Low voltage push button
- n. Lampholder
- o. Weather proof receptacle
- p. Fan outlet
- q. Junction box
- r. Bell and buzzer
- s. Transformer

***13. Electrical Conductors and Insulators**

- a. Importance of conductors and insulators
- b. Conductor resistance
- c. Conductor materials
- d. Conductor length
- e. Sizing
- f. Ampacity

- g. Use of tables and charts

*14. Electrical Terminations

- a. Pigtail splices
- b. Tee splices
- c. Western Union connection
- d. Terminal screw connection
- e. Solderless connections

15. Electrical Wiring Devices and Materials

- a. Classification
- b. Switches
- c. Receptacles
- d. Lampholders
- e. Junction boxes

16. Guest Speakers

- a. Government
- b. Industry
- c. Professionals
- d. Other Instructors

17. Field Trips

- a. Power plant
- b. Housing project under construction
- c. Commerical and industrial installation

F. METHOD OF INSTRUCTION

- 1. Lecture
- 2. Lecture/Demonstration
- 3. Audio/Visual Aids
- 4. Field Trips
- 5. Guest Speakers

G. METHOD OF EVALUATION

- 1. Written Examination
- 2. Oral
- 3. Attendance
- 4. Performance/Application
- 5. Classroom Participation

H. TEXT AND REFERENCES

- 1.
- 2.
- 3.

I. CLASSROOM EQUIPMENT

1. Overhead Projector
2. 16 mm Projector
3. Colored Chalk

*NOTE: Designates subjects which are covered in one semester.

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 1 CAREER ORIENTATION

Major Objective: Appraise the opportunities of a trade in residential wiring and its
requirements for employment.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Job description	Describe what the residential electrician does	Lecture guest speaker/discussion
b. Entry level requirements	Determine the age and health requirements to qualify to be an electrician.	Lecture Guest speaker from industry
c. Job ethics	Discuss the type of ethics that an electrician should be familiar with	Lecture/discussion
d. Working conditions	Determine if the working conditions of an electrician is favorable for their choice of occupation.	Lecture/discussion Student assignment (interview)
e. Job opportunities	Describe the possibilities for advancement in the field of electricity.	Lecture Guest speaker/discussion

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 2 SHOP ORIENTATION

Major Objective: Demonstrates habits which are conducive to learning.

SUB-UNITS

PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)

SUGGESTED LEARNING ACTIVITIES

a. Shop policy

Discuss various aspects of rules and regulations of the shop and classroom.

Lecture/discussion

b. Introduction of course content

Assess what is to be learned in the program of study.

Lecture/discussion

c. Grading policy

Determine methods used in grading.

Lecture/discussion

d. Location of books and references

Make maximum use of learning resources

Lecture/tour of library

e. Shop layout

Identify areas that are used as aisles, work-stations, construction areas, tools and material storage.

Lecture/tour

f. Location of tools

Identify area designated as tool room and state procedure in acquiring tools for shop use.

Lecture/tour

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 3 SAFETY

Major Objective: Explain the importance of practicing safe working habits.

74

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO DO)	SUGGESTED LEARNING ACTIVITIES
a. Safety program	Pass an examination on safety with 100% accuracy.	Lecture/demonstration/ display posters. Handout # <u>12</u>
b. First aid	List the emergency first aid procedure	Lecture/demonstration Handout Guest speaker (fire dept.)
c. Ventilation and lighting	Explain how improper ventilation and lighting can be hazardous to work condition.	Lecture/Demonstration
d. Material handling storage	Develop proper lifting skills and procedures for handling chemicals.	Lecture/demonstration
e. Location of fire extinguishers	Identify the location of the nearest fire extinguisher and state type of fire it can be used on.	Guest speaker (Fire dept.)

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 4 USE AND CARE OF ELECTRICAL WIRING TOOLS

Major Objective: Specify the tools most commonly used in the electrical industry.

15

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO DO)	SUGGESTED LEARNING ACTIVITIES
a. Screw driver	Demonstrate the proper use and care of screw drivers.	Lecture/demonstration Transparency TM - 1 - 2
b. Phillips screw driver	Demonstrate the proper use and care of phillips screw drivers.	
c. Knife	Demonstrate the proper use and care of knives.	
d. Diagonal pliers	Demonstrate the proper use and care of the diagonal pliers.	
e. Long nose pliers	Demonstrate the proper use and care of the long nose pliers.	
f. Side cutting/lineman's pliers	Demonstrate the proper use and care of the lineman's plier.	

LEVEL I UNIT 4 USE AND CARE OF ELECTRICAL WIRING TOOLS

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
g. Channel lok pliers	Demonstrate the proper use and care of the channel lok pliers.	Lecture/demonstration Transparency TM - 1 - 2
h. Torpedo level	Demonstrate the proper use and care of the torpedo level.	
i. Tape rule	Demonstrate the proper use and care of the tape rule.	
j. Folding rule	Demonstrate the proper use and care of the folding rule.	
k. Chisels	Demonstrate the proper use and care of chisels.	
l. Hammer	Demonstrate the proper use and care of the hammer.	
m. Keyhole saw	Demonstrate the proper use and care of the keyhole saw.	
n. Wire stripper	Demonstrate the proper use and care of the wire stripper.	
o. Hack saw	Demonstrate the proper use and care of the hack saw.	
p. Vise-grip pliers	Demonstrate the proper use and care of the vise-grip pliers.	
q. Tool pouch	Demonstrate the proper use and care of the tool pouch.	

LEVEL I UNIT 4 USE AND CARE OF ELECTRICAL WIRING TOOLS

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
<p>r. Fish tape</p> <p>s. Portable electric drill</p>	<p>Demonstrate the proper use and care of the fish tape.</p> <p>Demonstrate the proper use and care of portable electric drills.</p> <p>Identify and name each of the tools above.</p>	<p>Lecture/demonstration Transparency TM - 1 - 2</p>

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 5 SOURCES OF ELECTRICITY

Major Objective: Give examples of five sources of electricity and explain how electricity
is produced using those sources.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO DO)	SUGGESTED LEARNING ACTIVITIES
a. Friction	Explain how electricity can be produced by friction.	Lecture/discussion perform experiment (static)
b. Chemical	Explain how electricity can be produced by chemicals.	Lecture/discussion perform experiment (battery) Transparency
c. Magnetic	Explain how electricity can be produced by magnetism.	Lecture/discussion perform experiment (coil, magnet, and galvanometer) Transparency
d. Pressure	Explain how electricity can be produced by pressures.	Lecture/discussion (Phonograph crystal cartridge and scope) Transparency
e. Light	Explain or give an example of a form of electricity that is produced by light.	Lecture/discussion perform experiment with photo-cell.

LEVEL I UNIT 5 SOURCES OF ELECTRICITY

-2-

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
f. Heat	Explain how electricity is produced by applying heat.	Lecture/demonstration perform experiment with a thermocouple Transparency
g. Electricity	List six benefits derived from electricity.	Lecture/discussion Benefits: Power, Heat, Cooling, communications, Special controls

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 6 ELECTRICAL DISTRIBUTION

Major Objective: Explain and discuss about the electrical distribution system from the power plant to the resident.

20

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO DO)	SUGGESTED LEARNING ACTIVITIES
a. Power plant	State the purpose and location of the nearest power plant in the area.	Lecture/transparency Lower Base, Tanapag
b. Transmission lines	Identify the transmission line when shown a distribution system.	Lecture/transparency
c. Distribution lines	Identify and differentiate between the distribution lines and transmission lines.	Lecture/transparency Voltage and distance
d. Services	Identify the service conductors on a drawing or an actual installation.	Lecture/transparency Last pole to resident
e. Feeder lines	Distinguish between feeder lines and service lines and state its function.	Lecture/transparency Conductor between service equipment and panelboard FIELD TRIP TO POWER PLANT...

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 7 BASIC ELECTRICITY DC

Major Objective: Solve electrical problems using ohm's law.

12

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO DO)	SUGGESTED LEARNING ACTIVITIES
a. Electron theory	Name the three particles that make up an atom.	Lecture/diagrams Ref./Text p. 7 <u>Home Appliance Servicing</u>
b. Atomic theory	State the atomic theory	Lecture/diagrams <u>Ref./Text p. 7-9</u>
c. Batteries	Define terms associated with batteries Primary cells, secondary cells, ampere-hour, battery ratings.	Lecture/display Experiment: Science Act. 8 - Ref./Text p. TM - 7 - 1, 7 - 2
d. Conductivity of materials	Classify conductivity of a given set of materials.	Lecture/demonstration Ref./Text. p TM - 8

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
e. Ohm's Law	e. State the relationship between ohms, volts, and amperes.	e. Lecture/diagrams, TM2 & 3
	Manipulate symbols to solve problems when two know quantities are given.	Ref: Text, p. 5
	State the importance of being able to apply ohm's law formulas to electric circuits.	Transparency, TM-9, 10
		Lecture/diagrams
		Ref: Text, p. 5
		Lecture
		Ref: Text, p. 5
f. Series Circuit	f. Explain the relationship of ohm's, volts, and amperes in a series circuit.	f. Lecture/diagrams
	Solving problems associated with series circuits.	Ref: Text, p. 10
	Draw diagrams of series circuits.	Transparency TM 11, 12, 13
g. Parallel Circuit	g. State the characteristics of parallel circuits.	g. Lecture/diagrams
	Solve problems associated with parallel circuits.	Ref: Text, p. 12
	Draw Diagrams of parallel circuits.	Transparency TM 11, 12, 13
		Lab./Shop: Wire lampholders in series and parallel and prove ohm's law.
		Assignment sheet.

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 8 MAGNETISM

Major Objective: Explain the basic principles of magnetism

SUB-UNITS

PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)

SUGGESTED

ACTIVITIES

a. Laws of magnetism

State the laws of magnetism

Lecture/Demonstration
with magnets ,
Ref./Text p.
TM- _____

b. Electromagnetism

State some applications of electro-
magnetism and how it can be strengthened

Lecture/Demonstration
with coil
Ref./Text p.

c. DC Generator

Name the basic components of a dc
generator and its function

Lecture/discussion
Ref./Text p.
TM _____

EXPERIMENTS: SCIENCE ACT.
1- 4 - 13

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 9 ELECTRICAL DIAGRAMS

Major Objective: Explain the use of the three different types of diagrams used in electrical wiring.

SUB-UNITS

PERFORMANCE OBJECTIVES
(THE STUDENT WILL BE ABLE TO)

SUGGESTED LEARNING ACTIVITIES

a. Schematic Diagram

Read and trace the flow of current on a schematic diagram.
Draw a schematic diagram of a light controlled by a switch.

Lecture/demonstration
Transparency TM-
Ref: Text

b. Wiring diagram

Draw a wiring diagram of a light which is controlled by a switch.

Lecture/demonstration
Transparency TM-
Ref: Text

c. One-line diagram

State the use of one-line diagram.

Lecture/demonstration

LEVEL I: INTRODUCTION TO ELECTRICITY

Unit: 10 LOW VOLTAGE CIRCUITS

Major Objective: Install wiring using low voltage equipment.

26

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Use of low voltage circuits	State the uses of low voltage circuits in residential wiring and other applications.	Lecture Ref: Text, p. 141-145
b. Procedure in wiring signal circuits	State the procedure in wiring signal circuits	Lecture/chalkboard drawing - stress three-step procedure Transparency TM-
c. Operation of signal devices	Name three different types of signal devices used in residential wiring	Lecture, display devices Transparency TM-
d. Signal circuit equipment	List the equipment and supplies needed for wiring a low voltage signal circuit	Lecture/display Ref: Text, p. 141

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 11 USE AND CARE OF TEST INSTRUMENTS AND EQUIPMENT

Major Objective: Select the type of meter for determining voltage, ampere, resistance, and continuity.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Handling and transporting meters	State the importance of proper handling and transporting of meters.	Lecture/demonstration Ref: Text, p.
b. Zeroing the meter	Describe the reason for zeroing the meter	Lecture/demonstration Student application
c. Scale setting	Demonstrate the use of each scale on a meter.	Lecture/demonstration Student application
d. Identifying polarity	Distinguish between positive terminals and negative terminals either through color code or symbols.	Lecture/demonstration
e. Measuring voltage	Demonstrate the ability to safely and properly measure voltage across a load.	Demonstration/application Volt meter

-2-

LEVEL I UNIT 11 USE AND CARE OF TEST INSTRUMENTS AND EQUIPMENT

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
f. Measuring current	Demonstrate the ability to safely and properly measure current on a given load.	Demonstration/application Ammeter, amprobe
g. Measuring resistance	Demonstrate the ability to safely and properly measure resistance of a circuit.	Demonstration/application Ohmmeter
h. Storing	Explain the reasons for storing meters in a prescribed area.	Lecture/discussion Cool and dry area

50

51

LEVEL I INTRODUCTION TO ELECTRICITY
Unit: 12 ELECTRICAL SYMBOLS

Major Objective: Identify commonly used electrical symbols

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
<p>a. Single pole switch</p> <p>b. Double pole switch</p> <p>c. Three-way switch</p>	<p>Identify a single pole switch on an electrical plan.</p> <p>Draw the symbol for a single pole switch.</p> <p>Identify a double pole switch on an electrical plan.</p> <p>Draw the symbol for a double pole switch.</p> <p>Identify a three-way switch on an electrical plan.</p> <p>Draw the symbol for a three-way switch.</p>	<p>Lecture/discussion</p> <p>Handout # <u>2</u></p> <p>Ref: Text, p. 26-33</p> <p>Transparency TM-17</p>

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
d. Four-way switch	Identify a four-way switch on an electrical plan Draw the symbol for a four-way switch.	Lecture/discussion Handout # <u>2</u> Ref: Text, p. 26-33 Transparency TM-17
e. Duplex receptacle	Identify a duplex receptacle on an electrical plan. Draw a symbol for a duplex receptacle.	
f. Special purpose receptacle	Identify a special purpose receptacle on an electrical plan. Draw the symbol for a special purpose receptacle.	
g. Split circuit receptacle	Identify a split circuit receptacle on an electrical plan. Draw the symbol for a split circuit receptacle.	
h. Clock outlet	Identify a clock outlet on an electrical plan. Draw the symbol for a clock outlet.	
i. Floor outlet	Identify a floor outlet on an electrical Plan. Draw the symbol for a floor outlet.	

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
● j. Lighting outlet	Identify a lighting outlet on an electrical plan.	
	Draw the symbol for a lighting outlet.	
k. Lighting panel	Identify a lighting panel on an electrical plan.	
	Draw the symbol for a lighting panel.	
l. Low voltage pushbutton	Identify a symbol of a low voltage pushbutton on an electrical plan.	
31	Draw the symbol for a low voltage pushbutton.	
m. Lampholder	Identify a symbol for a lampholder.	Lecture/discussion Handout # <u>2</u> Ref: Text, p. 26-33 Transparency TM-17
	Draw a symbol for a lampholder.	
n. Weatherproof receptacle	Identify a weatherproof receptacle on an electrical plan.	
	Draw the symbol for a weatherproof receptacle.	
o. Fan outlet	Identify a fan outlet on an electrical plan.	
	Draw the symbol for a fan outlet.	

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
p. Junction box	Identify a junction box on an electrical plan.	
	Draw the symbol for a junction box.	
q. Bell or buzzer	Identify the symbol for a bell or buzzer on an electrical plan.	
r. Transformer	Identify a symbol for a transformer.	
	Draw the symbol for a transformer.	

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 13 ELECTRICAL CONDUCTORS AND INSULATORS

Major Objective: Demonstrate their ability to use ampacity tables in selecting conductors
for general wiring.

33

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Importance of conductors and insulators	Distinguish conductors from insulators.	Lecture/demonstration Display various conductors and insulators Ref: Text, p. Transparency TM-18
b. Conductor resistance	State the factors that affects resistance of conductors and insulators.	Lecture/demonstration Ref: Text, p. NEC Chapter 9, p. 587, Art. 310
c. Conductor materials	State the types of materials most commonly used in electrical wiring.	Lecture/discussion Ref: Text, p. Copper, alluminum,
d. Conductor length	Discuss the factors which determine resistance to its length.	Lecture/discussion Experiment with various lengths of conductors. Ref: Text, p. NEC, Chapter 9, Table 8.

LEVEL I UNIT 13 ELECTRICAL CONDUCTORS AND INSULATORS

-2-

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
e. Sizing	State the methods used in sizing electrical conductors.	Lecture/discussion Demonstrate with wire gauge Ref: Text, p. NEC, Chapter 9, Table 8
f. Ampacity	Use the ampacity table to determine the size of conductor for a given load.	Lecture/discussion NEC, ART. 310 Ref: Text, P. NEC, Table 310-16, 17, 18, 19
g. Use of tables and charts	Select the proper table or chart to determine conductor size.	Lecture/discussion NEC, Art. 310, 400, Chapter 9 Ref: Text, p.

LEVEL I INTRODUCTION TO ELECTRICITY

Unit: 14 ELECTRICAL TERMINATIONS

Major Objective: Select and apply the different techniques of splicing conductors.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
<div data-bbox="40 1045 73 1096" data-label="Text">35</div> <p>a. Pigtail splice</p> <p>b. Tee splice</p> <p>c. Western union splice</p> <p>d. Terminal screw connection</p> <p>e. Solderless connections</p> <p>f. Reinsulating splices</p>	<p>Demonstrate the proper method of forming a pigtail splice.</p> <p>Demonstrate the proper method of forming a tee splice.</p> <p>Demonstrate the proper method of forming a western union splice.</p> <p>Demonstrate the proper method of forming terminal screw connections.</p> <p>Demonstrate the proper method of making a solderless connection</p> <p>Demonstrate the proper method of reinsulating splices.</p>	<p>Lecture/demonstration Ref: Text, p. 147-173</p> <p>Student application</p>

LEVEL I INTRODUCTION TO ELECTRICITY
Unit: 15 ELECTRICAL WIRING DEVICES AND MATERIALS

Major Objective: Classify and identify electrical devices and materials.

36

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Classification	State the factors which determine the classification of devices and materials.	Lecture/discussion Use, rating, size Ref: Text, p. 135
b. Switches	List the four types of switches most commonly used in residential wiring.	Lecture/display Ref: Text, p. 111-138
c. Receptacles	State the applications for various types of receptacles.	Lecture/display Ref: Text, p. 35-38 <u>House wiring simplified</u>
d. Lampholders	Distinguish between keyless and pull-chain lampholders.	Lecture/display Ref: Text, P.
e. Junction boxes	Discuss the process of selecting the proper size junction box for a simple lighting circuit.	Lecture/discussion NEC Art. 370 Ref: Text, p. 24-25

COURSE OUTLINE LEVEL II

37 68

LEVEL II

A. COURSE TITLE: ELECTRICAL PRINCIPLES AND PRACTICES

B. COURSE DESCRIPTION

This intermediate course covers principles and wiring practices which are utilized in electrical circuits. Safety practices as well as code requirements and wiring techniques are stressed.

Students are taught the procedures in making electrical terminations, selecting overcurrent devices, and wiring various electrical circuits utilizing approved wiring methods and materials.

C. GOALS

The goals of this course are to provide the means by which the student can understand the principles and practices that are essential for pursuing a career in the residential wiring industry. The student will apply skills that can be applied to a wide range of occupations in the electrical field.

D. COURSE OBJECTIVES

Upon completion of this course, the student will be able to:

1. Recommend practices that promote learning
2. Develop habits that prevent accidents
3. Explain the difference between Direct Current and Alternating Current and its applications
4. Utilize the NEC and Standards in wiring practices
5. Explain the procedure for calculating the number of lighting circuits required for a residential dwelling
6. Demonstrate and apply various electrical terminations
7. Utilize the proper electrical symbols when drawing electrical diagrams
8. Select and explain the use of electrical wiring devices and materials
9. Explain the purpose and principles of overcurrent protection
10. Apply wiring methods recognized by the Code
11. Determine the proper size conductor for grounding an electrical system
12. Determine and select the proper materials for a service entrance
13. Analyze basic wiring problems in lighting circuits and correct them.

E. COURSE OUTLINE

1. Shop Orientation

- a. Shop policy
- b. Introduction to course content
- c. Grading policy
- d. Location of Books and References
- e. Shop layout
- f. Location of tools

2. Safety

- a. Safety program
- b. First aid
- c. Ventilation and lighting
- d. Material handling and storage
- e. Location of fire extinguishers

3. Basic Electrical Theory AC

- a. Uses of AC current
- b. Cycle
- c. Frequency
- d. Phase
- e. Voltages
- f. Transformers
- g. Inductance
- h. Capacitance

4. Introduction to the NEC and Standards

- a. Purpose of the NEC
- b. Scope
- c. Code arrangement
- d. Definitions
- e. Fundamental rules
- f. Interpretation
- g. Enforcement
- h. Examination of equipment for safety
- i. Wiring planning
- j. Revision
- k. History of the NEC

5. Electrical Blueprint Reading

- a. Introduction to blueprints
- b. Material description
- c. Scales
- d. Types of drawing
- e. Calculations

6. Electrical Terminations
 - a. Types of splices
 - b. Reinsulating splices
 - c. Use of soldering iron and solder
 - d. Use of crimping tools
 - e. Use of terminal clips
 - f. Preparing conductors for termination
 - g. Use of split-bolt connectors
7. Electrical Diagrams
 - a. Use of diagrams
 - b. Symbols
 - c. Single Pole
 - d. Three-way
 - e. Four-way
 - f. Lighting circuit
 - g. Combination of switch and pilot light
8. Electrical Wiring Devices and Materials
 - a. Definition
 - b. Switches
 - c. Receptacles
 - d. Lampholders
 - e. Junction boxes
 - f. Panelboards
 - g. Conductors
 - h. Cables
 - i. Raceways
 - j. Cords
 - k. Attachment caps
 - l. Fasteners
9. Overcurrent Protection
 - a. Purpose
 - b. Types
 - c. Selection
 - d. Usage
10. Wiring Methods
 - a. Raceways
 - b. Cables
 - c. Selection and application of wiring method

11. Grounding

- a. Purpose
- b. Types of grounding
- c. Methods of grounding
- d. Bonding
- e. Selecting grounding and bonding conductors
- f. NEC requirements

12. Electrical Service Systems

- a. Types of services
- b. Parts of the service system
- c. Calculating service sizes
- d. Selecting service entrance materials
- e. Installing services
- f. NEC requirements

13. Troubleshooting Procedures

- a. Analyze electrical circuit
- b. Determine malfunction
- c. Restoring problem
- d. Retest

14. Guest Speakers

- a. Government
- b. Industry
- c. Business
- d. Other instructors

15. Field Trips

F. METHOD OF INSTRUCTIONS

- 1. Lecture
- 2. Lecture/Demonstration
- 3. Audio/Visual Aids
- 4. Guest Speakers
- 5. Field Trips

G. METHOD OF EVALUATION

- 1. Written Examination
- 2. Oral
- 3. Attendance
- 4. Performance/Application
- 5. Classroom Participation

H. TEXT AND REFERENCES

- 1.
- 2.
- 3.

I. CLASSROOM EQUIPMENT

1. Overhead Projector
2. 16 mm Projector
3. Colored chalk

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 1 SHOP ORIENTATION

Major Objective: Demonstrate habits which are conducive to learning.

43

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Shop policy	Discuss various aspects of rules and regulations of the shop and classroom.	Lecture/discussion
b. Introduction of course content	Assess what is to be learned in the program of study.	Lecture/discussion
c. Grading policy	Determine methods used in grading.	Lecture/discussion
d. Location of books and references	Make maximum use of learning resources.	Lecture/tour of library
e. Shop layout	Identify areas that are used as aisles, work-stations, construction areas, tool and material storage.	Lecture/tour
f. Location of tools	Identify area designated as toolroom and state procedure in acquiring tools for shop use.	Lecture/tour

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 2 SAFETY

Major Objective: Explain the importance of practicing safe work habits.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
ety program	Pass an examination on safety with 100% accuracy.	Lecture/demonstration/ display posters. Handout # <u>12</u>
st aid	List the emergency first aid procedure	Lecture/demonstration Handout Guest speaker (fire dept.)
ilation and ting	Explain how improper ventilation and lighting can be hazardous to working conditions.	Lecture/demonstration
erial handling and age.	Develop proper lifting skills and procedures for handling chemicals.	Lecture/demonstration
ation of fire nguishers	Identify the location of the nearest fire extinguisher and state type of fire it can be used on.	Guest speaker (Fire dept.)

LEVEL II ELECTRICAL PRINCIPALS AND PRACTICES

Unit: 3 BASIC ELECTRICAL THEORY AC

Major Objective: Explain the difference between Direct Current and Alternating Current
and its application.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Uses of AC current	State the reason why AC current is used more frequently than DC current in our daily lives.	Lecture/diagram/discussion Ref./Text. p.
b. Cycle	Define the term "cycle" and state the frequently used ac cycle.	Lecture/transparency/handout (scope) Ref./Text. p.
c. Frequency	Define frequency	Lecture/diagram/handout Ref./Text. p.
d. Phase	Define the term "phase" and state the type most commonly used in electrical wiring.	Lecture/handout
e. Voltage	State the behavior of voltage in AC with comparison to DC electricity.	Lecture/diagram/transparency Ref./Text. p.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
f. Transformers	State the principal operation of a transformer and its application.	Lecture/diagram (stress induction) Ref./Text. p.
g. Inductance	Explain the behavior of inductance in an AC circuit.	Lecture/diagram Ref./Text. p. Stress "current lags voltage"
h. Capacitance	Explain the behavior of a capacitive circuit.	Lecture/diagram Ref./Text. p. Stress "current leads voltage"

Major Objective: To utilize the NEC in wiring practices.

SUB-UNITS

PERFORMANCE OBJECTIVES
(THE STUDENT WILL BE ABLE TO)

SUGGESTED LEARNING ACTIVITIES

a. Purpose of the NEC

State the purpose of the NEC.

Lecture

Ref: NEC, p. 1 Art. 90-1

b. Scope

Identify those areas that are covered and those that are not covered by the NEC.

Lecture

Ref: NEC, p. 1-2, Art. 90-2

c. Code Arrangement

Explain how the code is arranged and state specific articles used in general wiring practices.

Lecture

Ref: NEC, p. 2, Art. 90-3

d. Definitions

Define terms used in the NEC which pertain to residential wiring.

Lecture

Ref: NEC, p. 4-15, Art. 100

e. Fundamental rules

State the difference between mandatory and recommended rules and its application.

Lecture

Ref: NEC, p. 16, Art. 110

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
<p>f. Interpretation</p> <p>g. Enforcement</p> <p>h. Examination of Equipment for safety</p> <p>i. Wiring Planning</p>	<p>State procedure for filing for a formal code interpretation.</p> <p>Name the agency who does the enforcement of the NEC in their area.</p> <p>List two agencies who does examination of equipment.</p> <p>State reasons for adequate wiring planning.</p>	<p>Lecture Ref: NEC, p. 2, Art. 90-5</p> <p>Lecture Ref: NEC, p. 2, Art. 90-5</p> <p>Lecture Ref: NEC, p. 2, Art. 90-6</p> <p>Lecture/discussion Ref: NEC, p. 3, Art. 9 -7</p>
<p>j. Revision of the NEC</p> <p>k. History of the NEC</p>	<p>State how often the Code is revised and the general purpose of revisions.</p> <p>Discuss the origin and history of the NEC.</p>	<p>Lecture/discussion</p> <p>Student Assignments.</p>

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 5 ELECTRICAL BLUEPRINT READING AND CALCULATIONS

Major Objective: Explain the procedures for calculating the number of lighting circuits
required for a residential dwelling.

49	SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
	a. Introduction to blueprint reading	State the purpose of the blueprint. Identify symbols found in blueprints.	Lecture/discussion Ref./Text. p. 25-65 Use real blueprints
	b. Material description	Identify the types of materials used.	Lecture/discussion Ref./Text. p.
	c. Scales	Identify the scale used on a blueprint.	Lecture/discussion Ref./Text p.
	d. Types of drawings.	State the different types of drawings found in a set of blueprints.	Lecture/discussion Ref./Text. p. Plot plan floor plan/elec. plan Elevation Foundation Details

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
f. Calculation	Use the NEC to calculate various types of loads used in residential wiring.	<p data-bbox="1092 415 1463 642">Lecture/discussion Ref./Text p. NEC Chapter 9 Ex. B-1 p. 589 student application-Use floor plan.</p> <p data-bbox="1130 699 1398 785">Lighting loads, small appliance, washers</p>

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 6 ELECTRICAL TERMINATION

Major Objective: Demonstrate and apply the various types of terminations used in electrical installations.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Types of splices	List the various types of splices used in electrical installations.	Lecture/demonstration Ref./Text p. 147-173 Illustrations
b. Reinsulating	Explain the process used in reinsulating splices.	Lecture/demonstration Ref./Text p. 160-161
c. Use of soldering irons and soldering guns	Demonstrate the techniques of soldering splices.	Lecture/demonstration Ref./Text p. 151-153
d. Use of crimping tools	Demonstrate the use of the crimping tool.	Lecture/demonstration Ref./Text p. 148-149
e. Preparing conductors for termination	Prepare conductors for splicing	Lecture/demonstration Ref./Text p. 147 Stress preventing nicking conductors.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
f. Use of terminal clips	State the reasons for using terminal clips	Lecture/display Ref./Text p. 171-173 Stress: ease of attachment, limited space, saves time.
g. Use of wire nuts	Determine, select and apply the proper size of wire nuts to a pigtail splice.	Lecture/demonstration Ref./Text p. 161-163 Stress: clockwise rotation, no bare conductors, tightness of wire nut.
h. Use of split-bolt connectors	State where split-bolt connectors are most frequently used and demonstrate ability to install split-bolt connectors.	Lecture/demonstration Ref./Text p. 164-166 Stress; proper reinsulating techniques.

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 7 ELECTRICAL DIAGRAMS

Major Objective: Utilize proper electrical symbols when drawing electrical diagrams.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Use of diagram b. Symbols c. Single pole switch	State the use of a wiring diagram and a schematic diagram. Draw and identify various symbols used in residential wiring. Construct a diagram of a single pole switch controlling one or more lites.	Lecture/illustration Ref./Text p. Illustrate and explain single pole switch three-way switch four-way switch wire connection lampholder junction box pilot lite Ref./Text p. HO <u>1</u> Lecture/diagram/discussion Ref./Text p. 111-112 HO <u>1</u>

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
d. Three-way switching	Construct a diagram using two three-way switches controlling one or more lites.	Lecture/diagram/discussion Ref./Text p. 115-121 HO <u>9</u>
e. Four-way switching	Construct a diagram using two three-way and one four-way switch to control one or more lites.	Lecture/diagram/discussion Ref./Text p. 121-124 HO <u>10</u>
f. Lighting circuit	Construct a diagram of a lighting circuit utilizing single pole, three-way, four-way switches and lights.	Lecture/diagrams/discussion <u>Text/Ref.</u> p.
g. Combination switch and pilot light	Construct a diagram of a switch with pilot light.	Lecture/diagram/discussion Ref./Text p. 130-132

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 8 ELECTRICAL WIRING DEVICES AND MATERIALS

Major Objective: Select and explain the use of electrical wiring devices and materials

55

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Definition	Define and describe the difference between wiring devices and materials.	Lecture/discussion Stress: material overall term. Device Art. 100
b. Switches	Explain the function of a switch and name three types of switches used in residential wiring.	Lecture/discussion/display Ref./Text p. single pole, three-way four-way switches
c. Receptacles	Explain how receptacles are classified.	Lecture/display/discussion Ref./Text p. NEC Art 410 L
d. Lampholders	State the requirement for screw-shell type lampholders.	Lecture/display NEC Art. 410-47

LEVEL II UNIT 8 ELECTRICAL WIRING DEVICES AND MATERIALS

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
e. Junction boxes	State how boxes are classified and utilized.	Lecture/display Ref./Text p. NEC Art. 370-2, 3, 4 Table 370-6(a)
f. Panelboards	Define panelboard	Lecture/display Ref./Text p. NEC Art. 100, Art .384
g. Conductors	Utilize the NEC to indicate by trade name various conductors and its application.	Lecture NEC Table 310-13
h. Cables	State the use of various types of cables.	Lecture/display/discussion Ref./Text p. NEC Art. 336, 333, 338, 339
i. Raceways	Specify the types of raceways most commonly used in residential wiring.	Lecture/field trip NEC Art. 346, 347, 348 Ref./Text p.
j. Cords	Utilize the NEC to select cords and cables for specific applications.	Lecture/display NEC Table 400-4 Ref./Text p.
k. Attachment caps	Identify attachment caps and install/attach to flexible cords.	Lecture/demonstration Ref./Text p.
l. Fasteners	List the various types of fasteners used in electrical wiring.	Lecture/display Ref./Text p. Stress: wood screws sheetmetal screws, lag screws, machine screws, stove bolts, power fasteners.

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 9 OVERCURRENT PROTECTION

Major Objective: Explain the purposes and principles of overcurrent protection.

57

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. purpose	State the purpose of installing overcurrent protection in circuits.	Lecture/discussion NECT Art. 240 Ref./Text p. 282
b. Types of overcurrent protection	Identify various types of overcurrent devices.	Lecture/display Transparency 3 & 4 Ref./Text p. 282-286
c. Selection	Utilize the Code to select the proper rated overcurrent device to protect a given size conductor.	Lecture/discussion NEC Art. 310 p. 132-135 Ref./Text p. 286
d. Usage	State the proper type of overcurrent protection for given circuit.	Lecture/discussion NEC Art. 240-8, 50, 51, 52, 53, 54, 60, 61, G.

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 10 WIRING METHODS

Major Objective: Apply wiring methods recognized by the code

58

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Raceways	<p>State two types of raceways</p> <p>Name the type most commonly used in residential wiring.</p> <p>State the minimum trade size of PVC</p> <p>State the number of bends allowed in each run of raceway. (Maximum)</p> <p>Connect or join PVC</p> <p>Bend PVC by using heat</p>	<p>Lecture/display Ref./Text p. 320-323 Stress: metallic and non-metallic</p> <p>Lecture Non-metallic (PVC)</p> <p>Lecture NEC Art 347-10 ($\frac{1}{2}$")</p> <p>Lecture NEC Art 347-13 (4 $\frac{1}{4}$ bends)</p> <p>Lecture/demonstration Ref./Text p.</p> <p>Lecture/Demonstration Ref./Text p.</p>

LEVEL II UNIT 10 WIRING METHODS

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
A. Raceway	<p>Name the fittings used with PVC</p> <p>Name other materials used with PVC</p> <p>Use the NEC to determine size of raceway and number of conductors that can be inserted into the raceway.</p> <p>Name other types of raceways</p>	<p>Lecture/display Stress: adapters, couplings</p> <p>Lecture/display Stress: straps, locknuts, bushing, condulets, boxes, and covers</p> <p>Lecture NEC Art 347-11, Table 1 Chapter 9</p> <p>Lecture Ref./Text p. NEC Chapter 3 Rigid conduit, EMT, flexible conduit</p>
b. Cables	<p>Define the term "cable"</p> <p>Using the NEC state the article which covers NM cable.</p> <p>Demonstrate ability to install wiring using NM cable.</p>	<p>Lecture/Display NEC 100 Ref./Text p. 76-87</p> <p>Lecture NEC Art 336</p> <p>Lecture/demonstration Have student install wiring using NM cable</p>
c. Selection and application of wiring methods	<p>Use the NEC to select the correct wiring methods for either a concrete block dwelling or wooden structure.</p>	<p>Lecture NEC (Use not permitted and permitted)</p>

59

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 11 GROUNDING

Major Objective: DETERMINE THE Proper size conductor for grounding an electrical system.

Determine the proper size conductor for grounding equipment.

09

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Purpose	Explain why electrical systems and equipment are grounded.	Lecture/discussion NEC Art. 250 Ref./Text p. 295
b. Types of grounding	State the different types of grounding utilized in residential wiring.	Lecture/discussion NEC Art 250 - 5, E-42, 43, 44, 45 Ref./Text p. 295-299
c. Methods of grounding	Discuss and explain two different methods of grounding.	Lecture/discussion NEC Art 250-F Text p. 299-305
d. Bonding	Explain the purpose of bonding and draw a diagram of bonding a distribution panel and service.	Lecture/diagram/discussion NEC Art. 250-53b, 250-G Ref./Text p. 305-312

LEVEL II UNIT 11 GROUNDING

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
e. Selecting grounding and bonding conductors	Select the proper size conductor for grounding and bonding a residential service system using the NEC.	Lecture/explanation NEC Art. 250-94, 250-95 Ref./ <u>Text</u> p.
f. NEC requirements	Utilize the NEC to determine when and how to ground and bond services and equipment.	Lecture/discussion NEC Art. 250

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 12 ELECTRICAL SERVICE SYSTEM

Major Objective: Determine and select the proper materials for a service entrance.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Types of services	Name two types of residential services.	Lecture/discussion/diagram Single phase, two wire Single phase, three wire Voltage: 115/230 or 120/240 Ref./Text p. 255, 279
b. Parts of the service	List the parts of an electrical service entrance.	Lecture/transparency Service entrance cap/head Service mast (pipe) Meter base (socket) Ref./Text p. 256-266
c. Calculating service	Determine or compute the required rating of a service entrance.	Lecture/illustration NEC Art. 230-41b (1), (2) Chapter 9 example #1

LEVEL II UNIT 12 ELECTRICAL SERVICE ENTRANCE

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
d. Selecting service entrance materials	State the materials used for service entrances.	Lecture/display Entrance head/cap Conduit Connectors and fittings Meter base Condulets Conduit straps *Insulator Conductors Ref./Text p. 263, 274,-277
e. Installing services	Assemble materials and install a service entrance.	Lecture/demonstration Ref./Text p. TM ____ / HO 3
f. NEC requirement	Complete an exam on services with 80% correct.	Lecture NEC Art. 230

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

Unit: 13 TROUBLESHOOTING PROCEDURES

Major Objective: Analyze basic wiring problems in lighting circuits and correct them.

64

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Analyze electrical diagrams	Read and interpret schematic and wiring diagrams and trace current flow.	Lecture/diagram schematic and wiring diagram Ref./Text p.
b. Determine malfunction	Select the proper meter or tester to identify malfunction or disorder.	Lecture/review test instruments. Ref./Text p. Build/wire defective circuit
c. Restoring problem	Prescribe repair or replacement of circuit component.	Lecture/demonstration Ref./Text p.
d. Retest	State the procedure for safely retesting a defective circuit.	Lecture/demonstration List procedure Ref./Text p.

COURSE OUTLINE LEVEL III

LEVEL III

A. COURSE TITLE: ELECTRICAL APPLICATIONS AND INSTALLATIONS

B. COURSE DESCRIPTION

This final course covers the planning and designing of electrical circuits which are applied to residential dwellings. Some job acquisition skills are also taught to prepare students for employment.

Raceway wiring practices and techniques as well as testing, and analyzing electrical circuits are stressed in shop practice.

C. GOALS

The goal of this course is to prepare the student for entry level employment in the residential wiring industry. Safety practices as well as occupational skills, attitudes, and future employment trends are stressed.

D. COURSE OBJECTIVES

Upon completion of this course, the student will be able to:

1. Practice safety procedures used in industry
2. Plan and layout electrical circuits for a residential dwelling
3. Examine and explain the use of various electrical systems
4. Apply the requirements of the NEC to residential wiring
5. Select and install wiring devices and materials
6. Prescribe the type of fixture for specific locations and their classification
7. Analyze an existing lighting circuit and recommend procedures to alterate the lighting control
8. Explain the purpose of acquiring good job acquisition skills
9. Select a project to develop awareness in other electrical occupations
10. Acquire up-to-date information on subjects that are related to the job market and future trends.

E. COURSE OUTLINE

1. Safety
 - a. Accident prevention

- b. Equipment grounding
 - c. Safety rules
2. Planning and Laying Out Electrical Circuits
- a. Blueprint reading
 - b. Interpreting electrical specifications
 - c. Interpreting electrical symbols
 - d. Single-family dwelling calculations
 - e. Wiring methods
 - f. Code requirements
3. Electrical System Analysis
- a. Types of systems
 - b. Applications
 - c. Schematic diagrams
4. Advanced Interpretation of the National Electrical Code
- a. Use of tables and examples
 - b. Wiring methods and materials
 - c. Equipment for general use
 - d. References and guides
5. Wiring a Residential Unit/Dwelling
- a. Locating lighting outlets
 - b. Locating receptacle outlets
 - c. Locating appliance outlets
 - d. Locating switch outlets
 - e. Rough-in wiring (installing raceways and conductors)
 - f. Installing devices and cover plates
 - g. Installing services
 - h. Installing panelboards and circuit breakers
 - i. Installing lighting fixture
 - j. Testing and evaluating wiring
6. Lighting Fixtures
- a. Types of fixtures
 - b. Selection and application
 - c. Types and ratings of light bulbs/lamps
 - d. Automatic controls
 - e. Installing fixtures
 - f. Code requirements

7. Renovation and Troubleshooting

- a. Differentiate between alteration, repair, and new work
- b. Selecting proper materials
- c. Rearranging lighting controls
- d. Code requirement
- e. Terms and definitions

8. Job Acquisition Skills

- a. Job application process
- b. Developing a resume
- c. Future educational goals/Postsecondary education

9. Advanced Electrical Wiring

- a. Repairing small appliances
- b. Repairing large appliances
- c. Troubleshooting procedures
- d. Individual projects

10. Guest Speakers

- a. Government
- b. Industry
- c. Business
- d. Others

11. Field Trips

- a.
- b.
- c.

F. METHOD OF EVALUATION

- 1. Written Examination
- 2. Oral
- 3. Attendance
- 4. Performance
- 5. Classroom Participation

G. TEXT AND REFERENCES

- 1.
- 2.
- 3.

H. CLASSROOM EQUIPMENT .

1. Overhead Projector
2. 16 mm Projector
3. Colored chalk

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 1 SAFETY

Major Objective: Practice safety procedures used in industry

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
<p>a. Accident prevention</p> <p>b. Equipment grounding</p> <p>c. Safety rules</p>	<p>Identify unsafe/hazardous equipment and prescribe corrective measure.</p> <p>Discuss the importance of grounding equipment and methods used to ground equipment.</p> <p>List as many safety rules which will prevent accidents.</p>	<p>Lecture/demonstration Visual aid (if available)</p> <p>Lecture/demonstration Ref./Text page 296-299</p> <p>Lecture/handout Ref./Text p. TM _____</p>

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS
Unit: 2 PLANNING AND LAYING OUT ELECTRICAL CIRCUITS

Major Objective: Plan and layout electrical circuits for a residential dwelling

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Blueprint reading	Able to discuss the importance of blueprint reading for electricians.	Lecture/discussion Ref./Text. p. 25
b. Interpreting electrical specification	State the reasons for having a set of specification.	Lecture/discussion Ref./Text. p. 63
c. Interpreting electrical symbols	Discuss and identify the electrical symbols used in blueprints.	Lecture/discussion Ref./Text. p. 26
d. Single-family dwelling	Estimate the number of circuits required for a dwelling and layout the required number of outlets.	Lecture/discussion Ref./Text. p. 38 NEC Chapter 9 Example 1 Floor plan HO <u>11</u>
e. Wiring methods	Select wiring methods for both concrete and wooden structures.	Lecture/discussion NEC art. 336, 347, 346, 348, 339
f. Code requirements	State the code articles that pertain to electrical circuits and layout.	Lecture/discussion NEC Art. 210, 220.

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 3 ELECTRICAL SYSTEM ANALYSIS

Major Objective: Examine and explain the use of various electrical systems.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Types of systems	Explain the difference between a single-phase and three-phase electrical system.	Lecture and diagram/ Ref./Text. p. Load requirement
b. Applications	State when and where single-phase and three-phase systems are utilized.	Lecture/discussion Ref./Text. p. Residential/Commercial, Industrial
c. Schematic diagrams	Draw a schematic diagram of a single-phase and three-phase system with voltages.	Lecture/discussion/ diagrams. Ref./Text. p.

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 4 ADVANCED INTERPRETATION OF THE NATIONAL ELECTRICAL CODE

Major Objective: Apply the requirements of the NEC to residential wiring

SUB-UNITS

PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)

SUGGESTED LEARNING ACTIVITIES

a. Use of tables

Select the tables for sizing grounding conductors, conduit fill, conductor fill for boxes.

Lecture/discussion
NEC Tables 250-94
250-95

3A Chapter 9
370-6(a)

b. Wiring methods and materials

List the wiring methods approved for residential wiring and the basic materials
Name the code articles that covers the materials listed above.

Lecture/discussion
review methods and materials
NEC Art. 370, 380, 384, 410

c. Equipment for general use.

List those articles which pertains to residential wiring.

NEC Chapter 4
Read and discuss

d. References and guides

List at least two references and guides that would aid an electrician to interpret the NEC.

Lecture/discussion
Guide to the NEC., Audel
Electrical Construction and Maintenance,
National Electrical Code Handbook.

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 5 WIRING A RESIDENTIAL UNIT DWELLING

Major Objective: Select and install wiring devices and materials.

SUB-UNITS

PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)

SUGGESTED LEARNING ACTIVITIES

a. Locating lighting outlets

Identify various types of lighting outlets and locate outlet on framed structure.

Review symbols/Demonstration
Read blueprint
Use tape rule, climb ladder

b. Locating receptacle

Identify receptacle symbols and locate outlet on framed structure.

Review symbols/demonstration
read blueprint
use tape rule

c. Locating appliance outlets

Identify appliance outlets and locate on framed structure.

Review symbols/demonstration
read blueprint, use tape rule.

d. Locate switch outlets

Identify switch symbols and locate outlet on framed structure.

Review symbols/demonstration
read blueprint, use tape rule.

e. Rough-in wiring

Select proper size PVC and install to outlet boxes

Lecture/demonstration
Use of hack saw, glue,
adapters, raise covers.
Ref. Text. p.. 83,94

LEVEL III UNIT 5 WIRING A RESIDENTIAL UNIT DWELLING (continued)

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
e. Rough-in wiring	Determine conductor fill for boxes and conduits.	Lecture NEC Chapter 9 Table 3A Art. 370 Table 370 6(a)
f. Installing devices and cover plates	Select proper devices and cover plates and install same.	Lecture/demonstration/ display Ref./Text. p. 26-28 NEC. Art. 370-15
g. Installing services	Describe procedure in installing services.	Lecture/Demonstration Ref./Text. p. 255-294 Stress bonding and grounding NEC Art. 230-2, 22, 24, 26, 41, 46, 71, 79(c)
	List the materials used in a mast type service.	Lecture/display Ref./Text. p. 262, 263
h. Installing panelboard and circuit breakers.	Mount a panelboard and install circuit breakers.	Lecture/demonstration Ref./Text. p. 272-279 NEC. Art. 384-7, 15, 16, 27
i. Installing lighting fixtures.	Install fixtures used in dwellings	Lecture/demonstration Ref./Text p. NEC Art. 410-8, 12, 13, 15, 16, 17, 23, 26, 27, 28, 30, 31
j. Testing and evaluating	Test wiring which are free from shorts or grounds and passes an inspection by the instructor.	Lecture/demonstration Ref./Text. p. 405-407
		All installations to be done in shop.

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 6 LIGHTING FIXTURES

Major Objective: Prescribe the type of fixtures for specific locations and their classification

Text: Electrical Construction

Ref : NEC

House Wiring Simplified

SUB-UNITS

PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)

SUGGESTED LEARNING ACTIVITIES

a. Types of fixtures

List five different types of fixtures

Lecture/display
recess, surface mounted,
Vapor proof, weather proof,
incandescent, fluorescent, mercury
vapor.

b. Selection and application

State the procedure to use in selecting
fixtures for specific location and
applications.

Lecture/discussion
Ref./Text. p. 425
NEC. Art. 410-4

c. Types and ratings of
light bulbs

List the types and manner in which light
bulbs are rated.

Lecture/display
Ref./Text. p. 129-132

d. Automatic controls

List two types of automatic control
devices used for lighting.

Lecture/display
photo-cell
time switch

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
e. Installing fixtures	Install and hook-up fixtures to lighting outlets.	Lecture/demonstration <u>Ref./Text.</u> p. 87
d. Code requirement	State the code requirement for installing fluorescent fixtures, closet fixtures, and recess fixtures.	Lecture/demonstration NEC Art. 410-31 410-8 410-66

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 7 RENOVATION AND TROUBLESHOOTING

Major Objective: Analyze an existing lighting circuit and recommend procedures to alter the lighting control.

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Differentiate between alteration, repair, and new work.	Define terms used in alteration/renovation in electrical wiring. Discuss the difference between alteration, repair, and new work.	Lecture/demonstration Ref./Text. p. 405-437
b. Selecting proper materials	Select and identify by trade name materials used in electrical wiring.	Lecture/discussion Ref./Text p. 408-434
c. Rearranging lighting controls	Analyze a single pole switching circuit and recommend procedure in changing the switching arrangement to control the lite from two locations.	Lecture/diagram Stress wiring diagrams and schematic diagrams, conductor fill.
d. Code requirement	Identify code articles that would be used in the above objectives.	Lecture/discussion NEC Table 370-6(a), Chapter 9 Table 3A
e. Terms and definitions	Define terms and definitions used in renovation wiring.	Lecture/discussion

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 8 JOB AQUISITION SKILLS

Major Objective: Explain the purpose of acquiring good job acquisition skills

79

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Job application process	Fill out samples job application forms	Lecture/explanation Application form: Civil Service, Telecommunications Corp. Saipan Cable T.V. Co. Saipan Continental
b. Developing a resume	Complete a resume	Lecture/explanation Handout sample resume #17
c. Future educational goals/postsecondary education	Make a rational choice whether to continue their education and name a few schools that would provide the type of education to satisfy their needs.	Lecture Guest speaker MOC UOG HAWCC HONCC

LEVEL III ELECTRICAL APPLICATIONS AND INSTALLATIONS

Unit: 9 ADVANCED ELECTRICAL WIRING

Major Objective: Select a project to develop awareness in other electrical occupations

08

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
a. Repairing small appliances	Describe what a small appliance repair-person does.	Assignment by instructor Ref. DOT
	Select the proper test instrument to be used in repairing small appliances.	Individual instruction by instructor. Ref. <u>Home Appliance Servicing</u> . Anderson, Edwin P. <u>Small Appliance Repair Guide</u> . Vol. 1, Lemons, Wayne and Montgomery
b. Repairing Major appliances	Describe what a major appliance repair-person does.	Assignment by instructor Ref. DOT
	List by names appliances which are considered as being major appliances.	Lecture/discussion Ref. <u>Home Appliance Servicing</u> . Anderson, Edwin P <u>Major Appliance Repair Guide</u> , Lemon & Price

LEVEL III UNIT 9 ADVANCED ELECTRICAL WIRING

SUB-UNITS	PERFORMANCE OBJECTIVES (THE STUDENT WILL BE ABLE TO)	SUGGESTED LEARNING ACTIVITIES
c. Troubleshooting procedures	Describe and read troubleshooting procedures. Apply procedures in repairing a major appliance.	Lecture/discussion Ref. <u>Home Appliance Guide</u> -p. 68-91 Project assigned by instructor.
d. Individual projects	Select an activity in appliance repair.	Student/instructor agreement. Stress: Work habits, safety, responsibility, neatness.

APPENDICES

147

APPENDIX A JOB DESCRIPTION

JOB DESCRIPTION:

RESIDENTIAL ELECTRICIAN

The residential electrician performs repairs and maintains existing wiring in a residential structure. The electrician is responsible for the layout of new residential wiring, the calculation and installation of branch circuits, and other basic circuits. The electrician also installs proper size service entrance, installs electric heating and cooling if required, and installs all electrical devices used in a residence. This work is performed in a neat and workman-like manner to conform to local and National Electrical Code requirements.

In the process of performing these tasks, the electrician uses a basic set of handtools which are held in a tool pouch, hand held electric drills, an assortment of drill bits, extension cords, test instruments, ladders, hack saws, keyhole saw, fastening devices, etc.

The electrician works in cramped places, under buildings, on scaffolding and ladders, both indoors and outdoors.

APPENDIX B RESIDENTIAL WIRING TASKS

RESIDENTIAL WIRING TASKS

1. Read and interpret electrical plans and specifications
2. Layout general purpose receptacle outlets
3. Layout switch outlets
4. Layout lighting outlets (wall brackets)
5. Layout appliance outlets
6. Layout signal circuit outlets (low voltage)
7. Layout panelboard location
8. Layout route for raceways and cables
9. Install raceways and fittings
10. Install and set receptacle boxes.
11. Select, install and set switch boxes
12. Select, install, and set appliance boxes
13. Select and install panelboard
14. Layout ceiling lighting outlets
15. Install raceways to lighting outlets and switch points
16. Select, and install raceways for branch circuits
17. Layout service equipment and feeder
18. Select and install raceways for service and feeder
19. Select proper size wire and pull wires for outlets and branch circuits
20. Select proper size wire and pull wires for service and feeder
21. Splice and terminate all conductors
22. Select and install switches and receptacles
23. Install circuit breakers in panelboard and tie-in branch circuits
24. Select and install fixtures
25. Select and install cover plates
26. Select and install system ground conductor
27. Install push button and chimes (signal equipment)
28. Install panelboard cover
29. Test all circuits and balance load in panelboard
30. Label circuits in panelboard
31. Call for or apply for service drop and meter

Note: All wiring to be coordinated with other building trades occupations.

All wiring is approved by the power company before service is energized.

APPENDIX C SAMPLE LESSON PLAN

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 2 SHOP ORIENTATION

Instructor Plan

Student Objectives:

- a. Discuss various aspects of rules and regulations of the shop and classroom.
- b. Assess what is to be learned in the program of study.
- c. Determine methods used in grading.
- d. Make maximum use of learning resources.
- e. Identify areas that are used as aisles, work-stations, construction areas, tools and material storage.
- f. Identify area designated as tool room and state procedure in acquiring tools for shop use.

1. Shop Policy:

Shop rules
 Starting and ending hours/time
 Smoking prohibited in shop
 Absence
 Tardy
 Illness
 Personal hygiene
 Cooperation
 Student conduct
 Advising and counseling

2. Introduction of Course Content:

Discuss course content
 Course objectives
 Text and references
 Courses for further studies

3. Grading Policy:

Written examination
 Classroom participation
 Attendance
 Assignments/homework
 Shop practice/lab.

4. Location of Books and References:

- Classroom
- Library
- Borrowing policy

5. Shop Layout:

- Tour of shop
- Tool room
- Toilet
- Drinking fountain
- Work benches
- Construction wiring area
- Shop exits

6. Location of Tools:

- Handtools located in tool room
- Tool check out policy
- Student responsibility

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 3 SAFETY

Instructor Plan

Student Objectives:

- a. Pass an examination on safety with 100% accuracy.
- b. List the emergency first aid procedure.
- c. Explain how improper ventilation and lighting can be hazardous to work condition.
- d. Develop proper lifting skills and procedures for handling chemicals.
- e. Identify the location of the nearest fire extinguisher and state type of fire it can be used on.

Introduction:

Safety should be a concern of everyone. Your interest in safety includes that of protecting yourself and others from injury. Much emphasis is given to safety in all sectors of society. "Accidents don't just happen; they are caused". In times past, people frequently considered accidents as inevitable or "acts of God". Today this concept is no longer acceptable as a way of explaining accidents. A safety minded person has a perception of existing hazards. Preparation must be made for protection and to prevent accidents precautions must be taken.

1. Safety Program

- 1.1 Attend seminar on Safety Program
- 1.2 Guest speaker on safety
- 1.3 Have students observe posters in classroom and shop and have discussion on these posters

2. First aid

2.1 Emergency first aid procedure

- a. Call doctor or ambulance # _____, # _____.
- b. Inform instructor of accidents. Large or small _____

2.2 Demonstration by fire department (First aid)

3 Ventilation and Lighting

3.1 Ventilation

- a. Open windows and doors before working
- b. Turn on fans if available
- c. Close all windows, louvers, and doors when work has ended
- d. Turn off fans if applicable

3.2 Lighting

- a. Turn on all lights when beginning class/shop work
- b. Inform instructor if lights are not operable
- c. Provide for portable lighting when more lights are desirable
- d. Be sure that lights on electrical tools are in good working condition

4. Material Handling and Storage

4.1 Avoid injury by not lifting too heavy an object

Push, pull, roll, or slide when possible

If object is over 25 pounds, get assistance

Develop proper lifting skills

Always wear shoes

If more than one person is lifting the object, work as a team

Demonstrate carrying....pack a box with about 25 lbs. of books

Check your footing. Avoid slippery or hazardous areas

Spread your feet slightly (comfortable) with one foot slightly forward and along side of object.

Bend knees, kneel or squat

Do not bend back to reach for load

Get close to object being carried

Use blocking under objects to provide hand space..demonstrate

Get a firm grip..use gloves when handling sharp objects..demonstrate

Let your legs do the lifting....demonstrate

Shift the feet to turn...demonstrate

To lower load, bend the knees, keep the back straight, and use legs and arms to lower the load

When moving long objects, check that the area is clear of obstructions, persons, and co-workers

Film, if available

4.2 Chemicals

Check with instructor before using any chemicals or solvents

Avoid contact to skin

Wear rubber gloves or plastic gloves

Use face shield

Do not inhale fumes

5. Location of Fire Extinguishers

- 4.1 Identify location of nearest fire extinguisher _____.
Identify or state type of fire that this fire extinguisher
can be used for _____.
Do not play with fire extinguishers.
Always return them at their intended location
Report to instructor if fire extinguisher is not at the
proper location
- 4.2 Types of Fire Extinguishers
Provide students with handouts # 11
Type ABC dry chemical the most commonly used
- 4.3 Have students state types of fires and type of extinguisher
to be utilized. Use handouts.

NAME: _____

DATE: _____

GRADE: _____

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 3 SAFETY

TEST

In the space provided at the end of each statement, write a T if the statement is True and F if the statement is False.

1. When someone in the shop has an accident, you should notify your principle first. ____
2. Portable first aid kits are provided to apply simple aid to minor cuts or burns. ____
3. The purpose of the exhaust fans are to circulate the air in the shop. ____
4. When using stationary power tools in the shop such as a drill-press or grinder, it is not desirable to have lighting at each tool. ____
5. In carrying and lifting long objects such as conduits or wood consider that no one is around. ____
6. To avoid electrical shock, all ornaments such as rings, watches, chains, and other metal objects should be removed before attempting to work on live circuits. ____

SHORT ESSAYS:

7. List the three-step emergency first aid procedure.
8. List atleast five proper procedures in lifting heavy objects.
9. Name three classes of fires and indicate what causes these fires.

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 4 USE AND CARE OF ELECTRICAL WIRING TOOLS

Instructor Plan

Student Objectives:

- a. Demonstrate the proper use and care of screw drivers.
- b. Demonstrate the proper use and care of phillips screw drivers.
- c. Demonstrate the proper use and care of knives.
- d. Demonstrate the proper use and care of the diagonal pliers.
- e. Demonstrate the proper use and care of the long nose pliers.
- f. Demonstrate the proper use and care of the lineman's plier.

Introduction:

Importance of use and care of electrical wiring tools.

1. When properly applied, they are time savers.
 2. When properly cared for, they are safe to use and prevents accidents.
 3. Overall appearance of the job will look acceptable. (Workmanship)
 4. Mark of a qualified tradesperson.
- a. Screwdriver: Display
 Use to install various types of straight slot screws.
 Sized according to length of shank and width of tip.
 example: OH (overhead transparency)
 Insulated handles to prevent electrical shock
 Keep handles free of burrs.
 Tip should be as wide as the slot of the screw.
 Keep tips ground straight and flat (OH)/demonstrate
 When installing screws, keep screwdriver level or plumb to prevent slippage. Demonstrate.
 - b. Phillips screwdriver: Display
 Used to install various sizes of phillips screws.
 Tip has a tee slot and thus provide more grip and prevents slippage.
 Sized according to length of shank and width of tip.
 example: OH.
 Keep handles free of burrs.
 Blades should be kept straight.
 When installing screws, keep screwdriver level and plumb to prevent slippage. Demonstrate.

159

- c. Knife: Display
Used to skin or remove insulation from conductors and cables. Whenever possible, face blade away from body. Demonstrate. Keep blade sharp to prevent accident as well as achieving maximum advantage.
- d. Diagonal pliers: Display.
Used for cutting conductors, cables, stripping insulation, and form loops. Demonstrate.
Keep handles free from oil and grease to prevent slippage
Insulated handle will prevent electrical shock.
Not to be used as a hammer.
- e. Longnose pliers: Display.
Used to reach into narrow/tight spaces, form loops, making splices. Demonstrate.
Do not use longnose to tighten large bolts or nuts.
Use insulated handles whenever possible.
- f. Side cutting pliers/lineman's pliers: Display.
Used for cutting conductors, cables, and stripping insulation off conductors. Also used to form loops for terminal connections and splicing. Demonstrate.
Keep handles free from oil and grease to prevent slippage.
- g. Channel lok pliers: Display.
Used to tighten and remove locknuts and bushings, to install split-bolt connectors, gripping conduits and tubings. Demonstrate.
Adjust opening according to width of work and be able to hold handle with one hand if possible. Demonstrate.
Tighten and loosen objects so that the direction you are turning will provide the greatest grip. Demonstrate.
- h. Torpedo level: Display.
Used to level and plumb work. Demonstrate.
Magnetic base will provide a free hand when using a level.
Do not drop level or damage surface.
- i. Tape rule: Display.
Used for measuring distances.
Do not leave tape rule opened and laying out.
Recommend 12 feet ruler or longer. Conduits are 10 feet long and you may over extend the rule. Comes in different types of materials and color.
Avoid kinking tape to prevent breakage.

- j. Chisels: Display.
Used for notching wood
Keep chisels sharp and handles free of burrs and grease.
Sized according to the width of the cutting blade. Demonstrate.
- k. Hammer: Display.
Electrician's or ripping hammer. Claw is less curved than the carpenter's hammer.
Sized according to weight.
Keep hammer head smooth and free of burrs or mushrooming.
- l. Keyhole saw: Display.
Used for cutting opening for boxes, notching.
Classified according to type of blade. May be used to cut wood, metal, gypsum board, and fiber boards.
Start cut by pulling back towards you. This may prevent the blade from jumping and cutting your hands or fingers.
- m. Wire stripper: Display.
Used to strip insulation off conductors and form terminal loops.
Also used to cut smaller sizes of conductors. Demonstration.
- n. Hacksaw: Display.
Used for cutting conduits, cables, metals, woods, and fiber-boards.
Blades classified according to the number of teeth/tooth per inch., recommend using 18 or 24 teeth blade for electrical work.
When cutting, keep hacksaw frame straight. Demonstrate.
Pull back when starting any cuts before making forward strokes to prevent saw from jumping and cutting your hands or fingers.
- o. Vise grip pliers: Display
Used as a locking pliers to provide a strong grip and prevent slippage.
Take precaution not to damage area where pliers grip.
Keep handles clean and jaws free of debris to prevent slippage.
- p. Tool pouch: Display.
Used for carrying handtools.
Made of leather and should be kept from drying out and cracking
Use a leather preservative or saddle soap.
Keep tool points facing in the pouch when carrying tools rather than the points up.

Examination
Application

NAME _____
DATE _____
GRADE _____

TEST

Identify at least 14 of the 16 tools which will be shown to you and state its use.

1. _____
2. _____
3. _____
4. _____
5. _____
6. _____
7. _____
8. _____
9. _____
10. _____
11. _____
12. _____
13. _____
14. _____
15. _____
16. _____

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 5 SOURCES OF ELECTRICITY

INSTRUCTOR PLAN

Student Objectives:

- a. Explain how electricity can be produced by friction.
- b. Explain how electricity can be produced by chemical.
- c. Explain how electricity can be produced by magnetism.
- d. Explain how electricity can be produced by pressures.
- e. Explain or give an example of a form of electricity that is produced by light.

a. Friction:

A form of static electric. Can be produced by rubbing two objects together.

Procedure in setting-up an experiment:

1. One piece of silk rag 12" x 12"
 2. A glass rod about 12" long
 3. Fold silk cloth in half and place rod between silk. Some electrons are transferred from the cloth to the rod, the rod is no longer neutral because it now has more negative electrons than positive protons.
 4. Pick-up small bits of paper with the glass rod.
- Triboelectricity
TM 26

b. Chemical:

The simplest kind of cell consists of two pieces of different metals in a solution.

The pieces of metals are called electrodes.

These electrodes must be of different metals.

The solution is called an electrolyte.

The electrolyte must be a conductor of electric current.

It must have a chemical action with one of the electrodes.

Another type of battery is called the storage battery or secondary cell

Procedure in setting-up an experiment:

1. A glass jar

2. A copper bar and a zinc bar
3. Sulfuric acid and water. NOTE: MIX ACID INTO WATER TO PREVENT RAPID CHEMICAL ACTION.....(H_2SO_4)
4. Use galvanometer to test voltage.
TM 27

c. Magnetic:

The simplest form of magnetic/mechanical means of producing EMF is by moving a magnet into a coil of wire. THE GENERATOR

Procedure in setting-up an experiment:

1. a bar magnet
2. Ten feet of copper conductor, #16 or smaller formed into a loop wide enough to move the bar magnet into. Skin both ends of the loop.
3. Connect ends of loop to galvanometer or sensitive volt meter.
4. Slide magnet into loop and note needle deflection on meter.
5. You have now produced EMF by using a magnet.

d. Pressure:

Electricity is produced when pressure is applied to a crystal. Substance such as quartz, tourmaline, and Rochelle salts are good examples of electrical charges.

1. A piece of crystal
2. A metal plate
3. Insert the crystal between the metal plate and move the crystal back and forth. Note results
4. Connect leads to galvanometer.
TM 28

e. Light:

The simplest form is a photo cell which utilizes selenium to produce EMF which in turn energizes a contact to open and close the circuit of the photo cell to control lites or other apparatus.

Procedure in setting-up an experiment:

1. Selenium, iron and translucent window.
2. Insert the selenium in between the iron and translucent window.
3. Apply light through the translucent window.
4. Connect galvanometer to leads and note reaction.
TM 30


f. Heat:

The simplest form is a thermocouple. Connecting two different types of metals and applying heat to the joint will produce EMF.

Procedure in setting-up an experiment:

1. A piece of copper wire
2. A piece of zinc
3. Candle/Flame
4. Combine both the copper and zinc and connect ends to a galvanometer.
5. Heat the joint with the candle and note meter movement.

TM 29

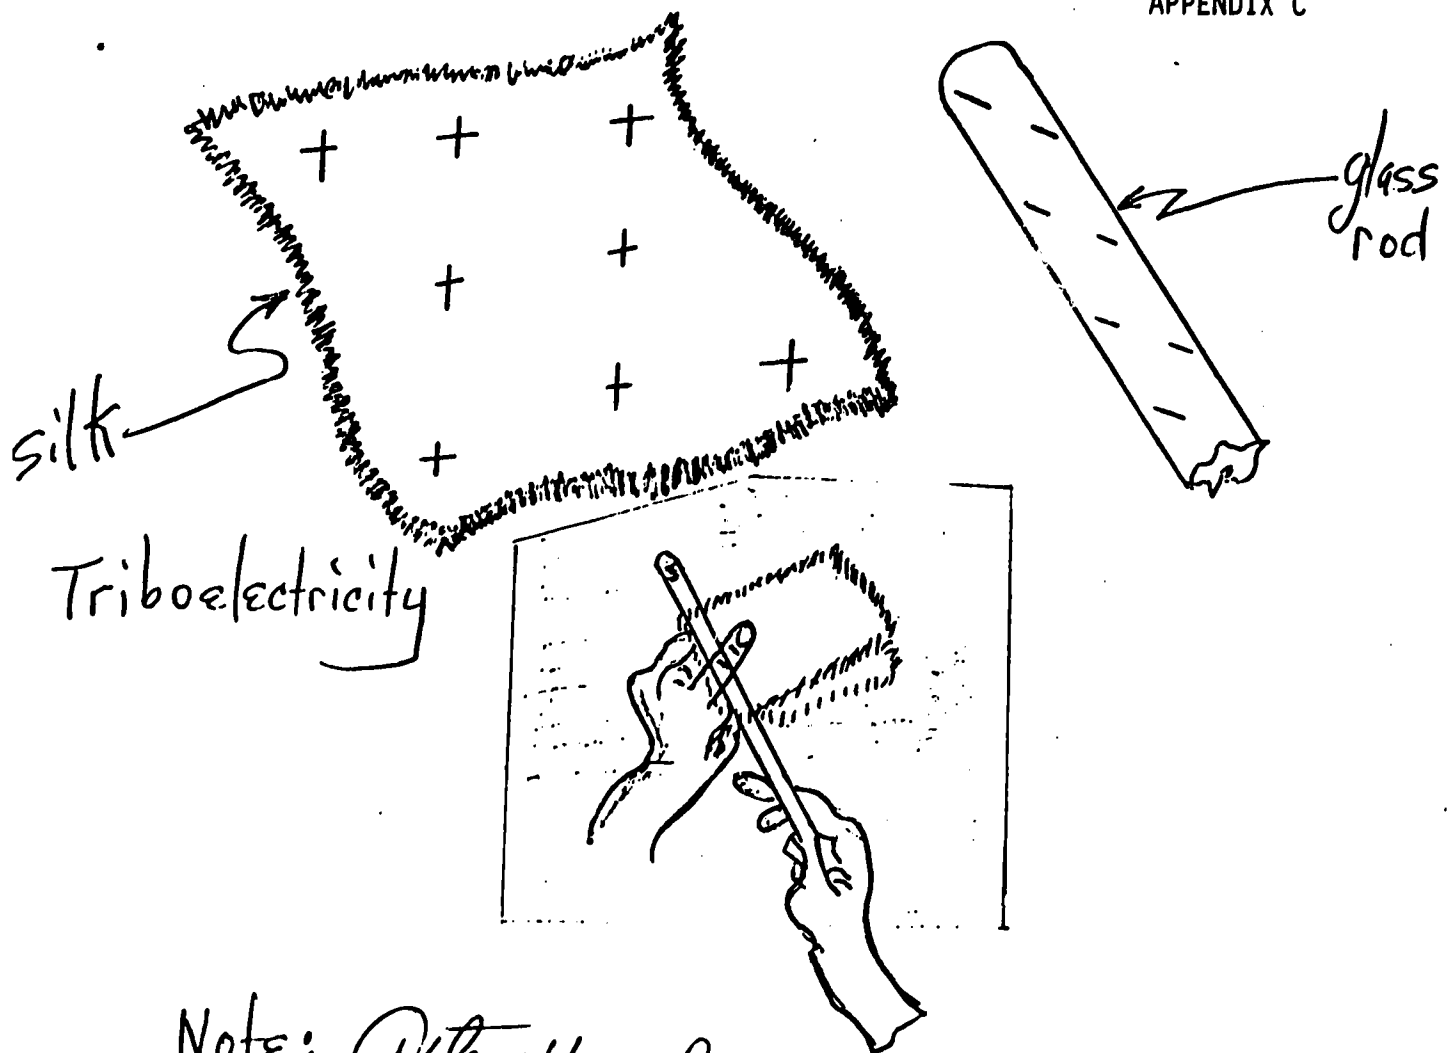



Note: After the glass rod and silk are rubbed together, they become charged with electricity.



Another method of producing friction:


Piece of wood (soft type, work faster)

One 12 inches long wood (diameter $\frac{1}{4}$ of inch)

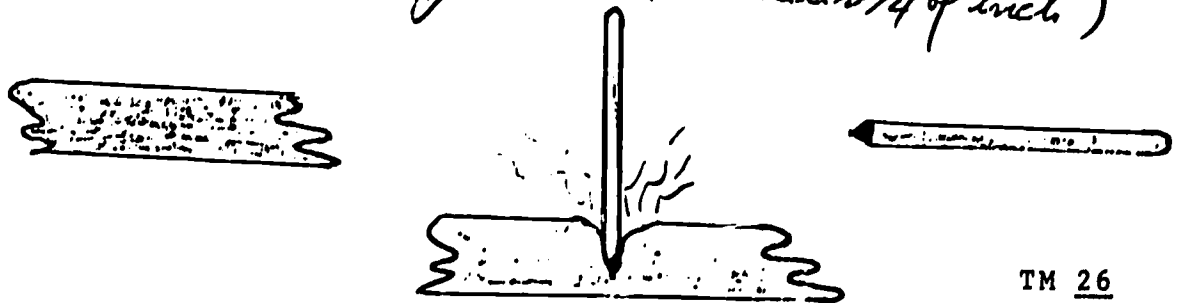


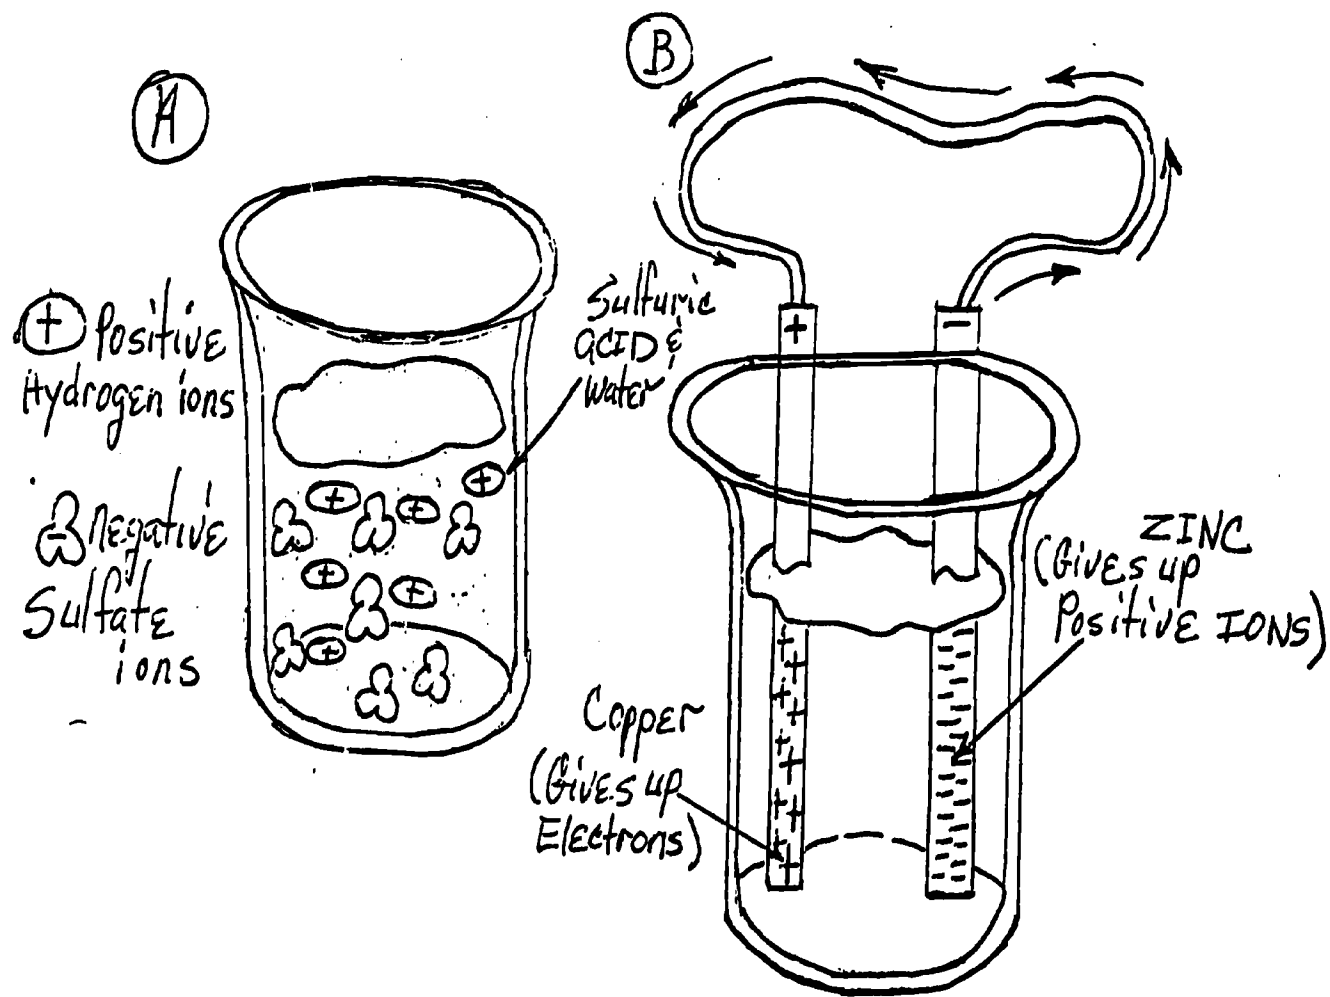

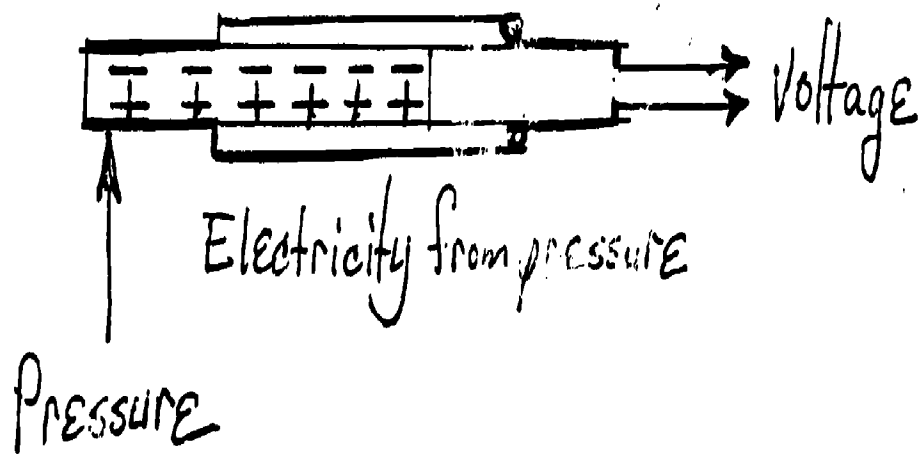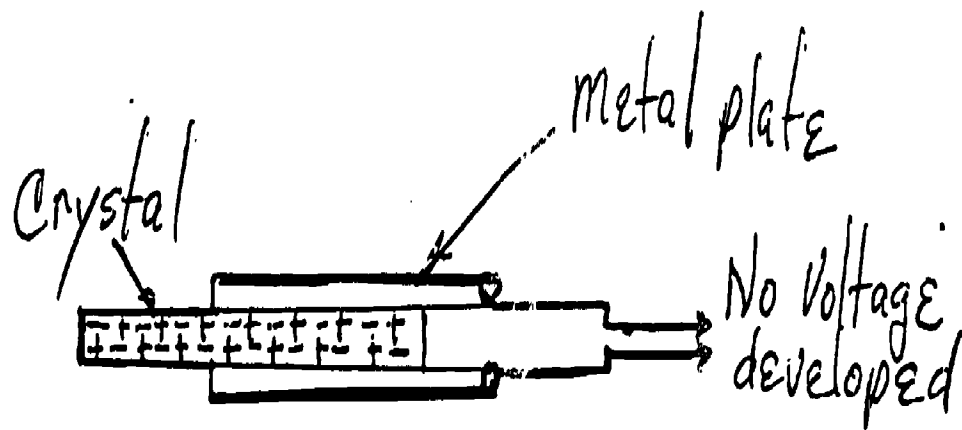

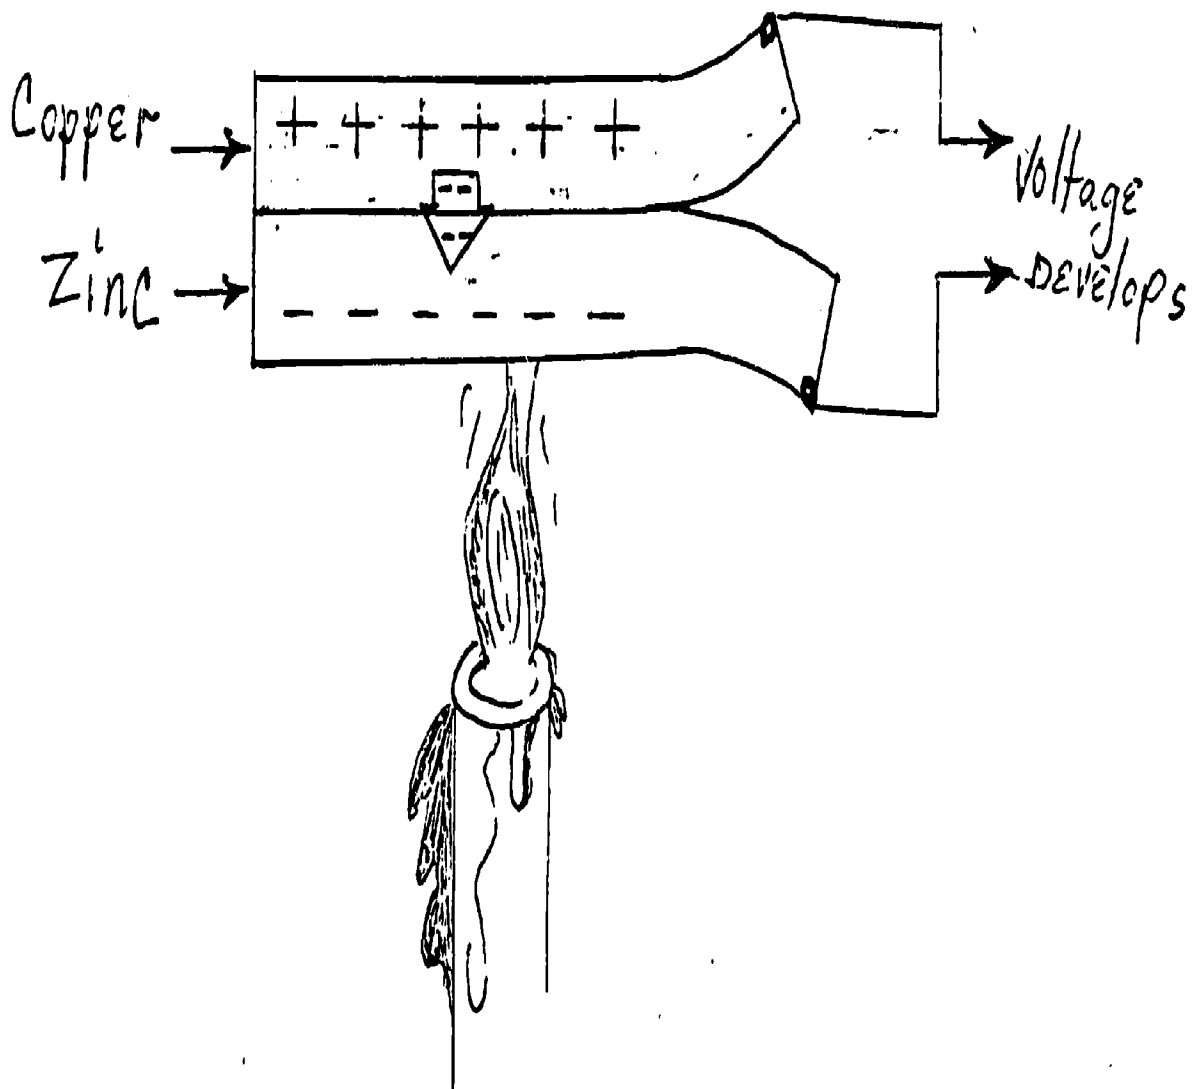

Electricity from heat

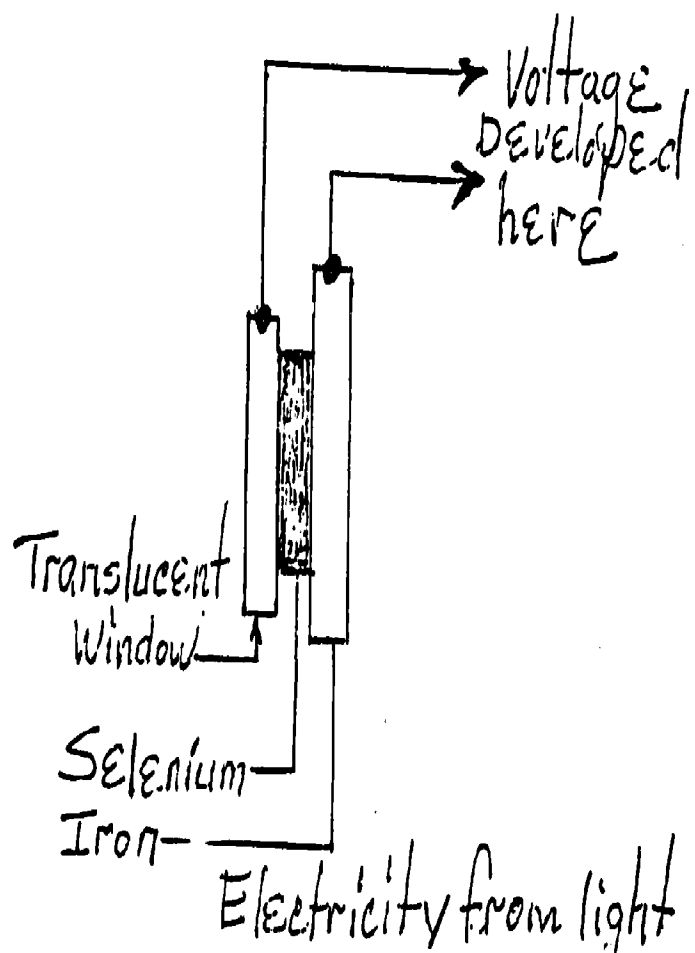

NAME: _____

DATE: _____

GRADE: _____

Level I INTRODUCTION TO ELECTRICITY

UNIT 5 SOURCES OF ELECTRICITY

TEST

List five sources of electricity and state how electricity is produced by each source.

1.

2.

3.

4.

5.

The following questions are True and False items, place a T or F to make each statement correct.

6. _____ Electrolyte is formed when sulphuric acid and water is mixed.
7. _____ The formula for sulphuric acid and water is H_2SO_4 .
8. _____ Magnet can be created by placing a metal into an energized coil of wire.
9. _____ When two unlike poles are placed close together, they repel each other.
10. _____ Electricity is produced when pressure is applied to a crystal
11. _____ Batteries are examples of static electricity

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 6 Electrical Distribution

Instructor Plan

Student Objectives:

- a. State the purpose and location of the nearest power plant in your area.
 - b. Identify the transmission lines when shown a distribution system lines.
 - c. Identify and differentiate between the distribution lines and transmission lines.
 - d. Identify the service conductors on a drawing or an actual installation
 - e. Distinguish between feeder lines and service lines, and state the function.
- a. The power plant
 1. Located in Lower Base, Tanapag
 Purpose: To generate enough power to provide the electrical needs of the island.
 TM 1 Note: Voltage output from the generator _____ volts.
 - b. Transmission Line
 1. The power lines that leave the generating plant..usually the highest rated voltage line in the system.
 Note: step-up Substation on TM
 TM 1
 - c. Distribution Lines
 1. Distribution lines are mounted at a lower height than the transmission lines and are of a lower voltage rating than the transmission lines.
 TM1: Note: Step-down Substation before distribution lines.

d. Services

1. Those are the conductors from the last pole to the premises being serviced. Either overhead or underground. TM1


2. Have students state whether their service is underground or overhead.

e. Feeder Lines

1. Feeder lines or conductors are those lines from the service equipment to the panelboard.

2. Residential wiring usually employ four (4) conductors.
 2 hot conductors
 1 neutral conductor
 1 equipment grounding conductor

3. Diagram of feeder conductors:

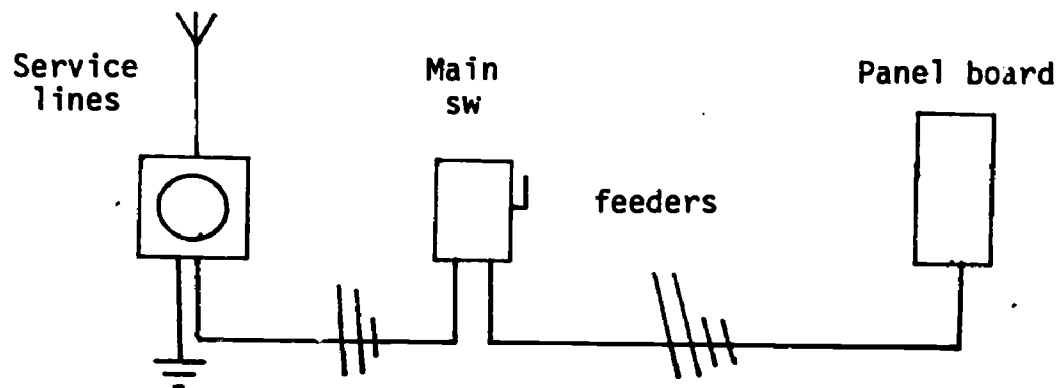

f. Arrange for field trip to the power plant

g. Administer exam.

NAME: _____

DATE: _____

GRADE: _____

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 6 ELECTRICAL DISTRIBUTION


TEST

This is a matching test, you are to write the alphabet in the space provided at the end of each statement that best describes the major parts of the electrical distribution system.

- | | |
|--|-----------------------|
| 1. Provides the necessary energy to supply the island with electricity. ____ | a. Distribution lines |
| 2. The conductors from the last pole to the premises. ____ | b. Feeder lines |
| 3. Those conductors that includes a neutral and equipment grounding conductors. ____ | c. Transmission lines |
| 4. Those conductors that emerge from the power plant and possess the highest voltage in the system. ____ | d. Service lines |
| 5. Those conductors that feeds the transformers on the power poles. ____ | e. Power plant |

On the attached handout, place/write in the terms in the proper locations.

Electrical Transporting Lines

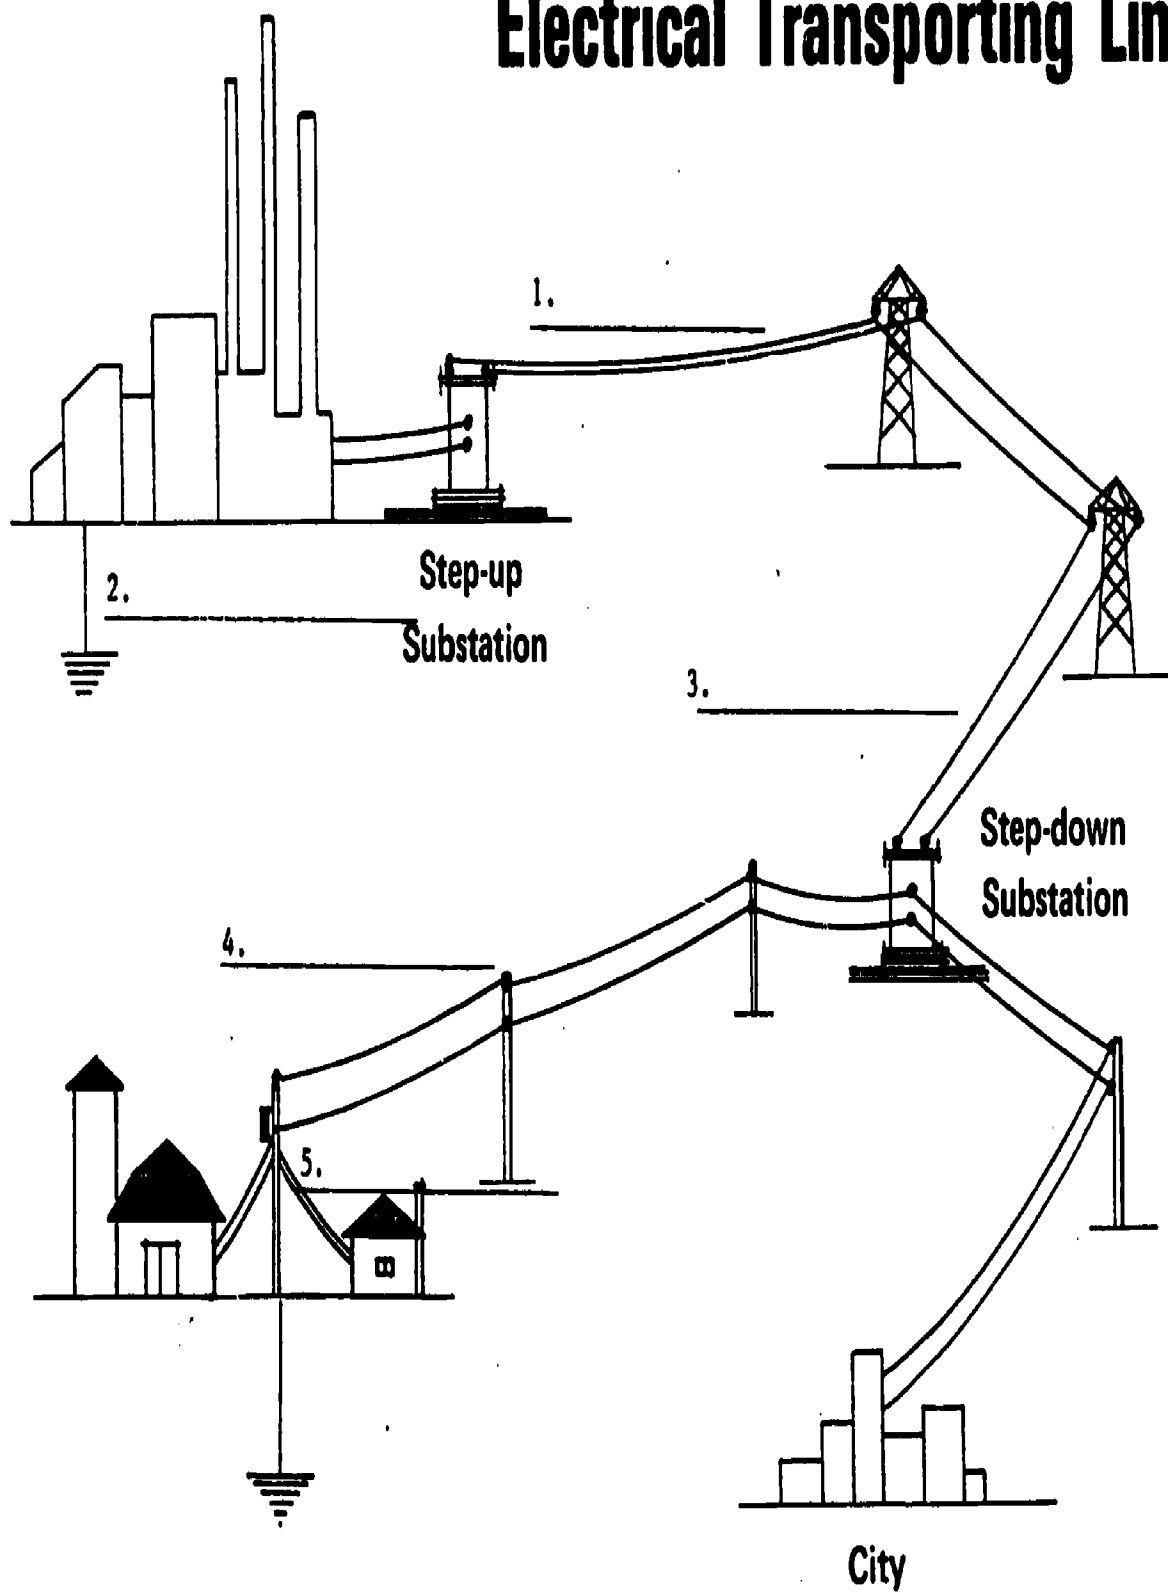

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 8 Magnetism

Instructor Plan

Student Objectives:

- a. State the laws of magnetism
- b. State some applications of electromagnetism and how it can be strengthened.
- c. Name the basic components of a DC generator and its function

Introduction

History: 200 BC Greeks discovered magnets and called them magnesia. Chinese, about 1100 AD called them leading stone and used by mariners as direction finders. Sometimes called magnetite or lode stones.

Characteristics: Two magnetic poles
 Repulsion
 Attraction
 Direction (north geographical pole)

- a. Laws of magnetism
 - a.1 Repulsion and attraction
 - a.2 Lines of force
 Demonstration: place paper over bar magnet and pour iron fillings to form a pattern. Tap paper slightly.
 - a.3 Magnetizing iron
 Align molecules
 Retentivity: Ability to retain magnetism
 - a.4 Permeability: Ability to conduct magnetic field
 Magnetism has no known insulation
 Demonstration: experiment with magnet and glass, paper wood.
- b. Electromagnetism
 - b.1 Condition: When current flows through a conductor, a magnetic field is developed.
 Demonstration: with current flowing through a conductor and a compass or magnet.
 Left hand rule (current flow)

- b.2 Strength of magnetic field depends on the following conditions:
 - Source
 - Number of turns of wires
 - Type of iron core and size of core
 - Demonstration: experiment with pencil and nail to show strength of electromagnets. #1 Science Activities, #4 Science Activities
- b.3 Applications of electromagnets
 - Relays
 - Coils
 - Vibrating bells
 - Solenoids
- C. DC Generator
 - c.1 Definition: A machine designed for generating direct-current. Electricity.
 - c.2 Three condition necessary for generating electric current.
 - Magnetic field
 - Closed circuit
 - Motion
 - c.3 Basic concept
 - When a conductor is moved through a magnetic field, a voltage is induced in the conductor
 - c.4 Four basic parts of a DC generator
 - Wire loop
 - Magnetic field
 - Commutator
 - Brushes

Student Project: Conduct experiments 1 or 4. Explain concept of experiments.

NAME: _____
DATE: _____
GRADE: _____

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT H MAGNETISM

TEST

The following 10 questions are multiple choice questions. You are to select the answer or answers which makes the statement correct.

1. The region of influence around a magnet is called _____.
a. Resistance b. Reluctance
c. Magnetic field d. Field of force
2. Some magnets are found in its natural form, these are referred to as _____.
a. Lime stone b. Load stone
c. Lead stone d. Wheat stone
3. Magnets with like poles will _____.
a. Repel b. Attract
c. Neutralize
4. If allowed to swing freely, a magnet will align itself so that its _____ pole points toward the geographical north pole.
a. South b. North
5. A magnet is a material which is surrounded by a _____.
a. Electric current b. Magnetic field
c. Conductive field d. Inductive field
6. When electric current passes through a wire, a _____ is produced.
a. Conductive field b. Inductive field
c. Magnetic field d. Armature field
7. A basic rule of magnetism is that like poles _____ while unlike poles _____.
a. Attract and repel b. Repel and attract
c. Attract and attract

Briefly answer the following four questions.

8. Define permeability:

9. List at least four examples where electromagnets are used in electrical installations.
 - a.
 - b.
 - c.
 - d.
10. Name the basic components of a DC Generator.
11. Refer to question 10 and describe the function of each component.





HOW MUCH STRONGER IS AN ELECTROMAGNET MADE ON A BOLT THAN ON A PENCIL?

MATERIALS:

6 Meters #24 enameled copper wire, fine sandpaper, 1 D cell, masking tape, brads or tacks, 3" bolt, pencil, compass

Make an electromagnet on the pencil like this:

Test its strength with brads or tacks!

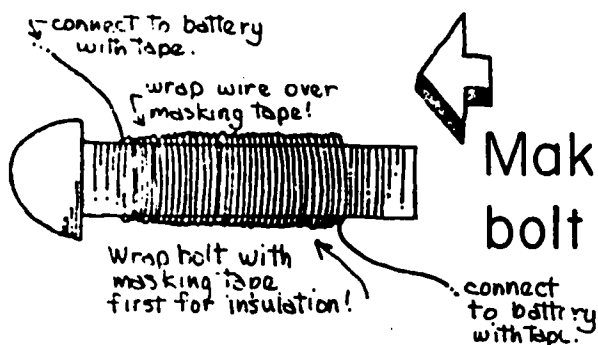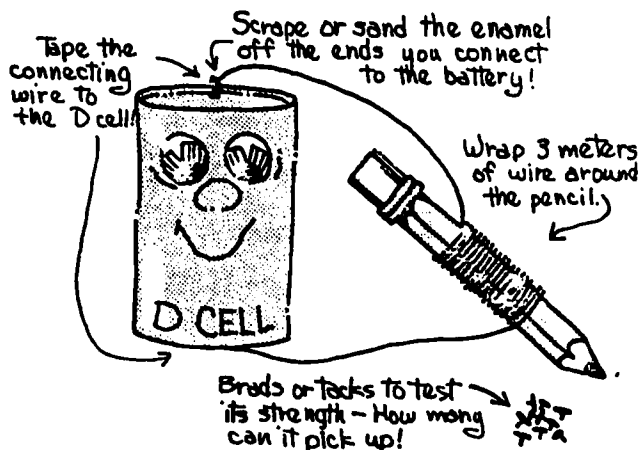


Make an electromagnet on the bolt like this. Test it, too!

Try this experiment with a permanent magnet instead of your electromagnet - compare the strength of each!

Can you think of ways to make your electromagnet stronger?

See how far away from a compass you can hold either and get results.

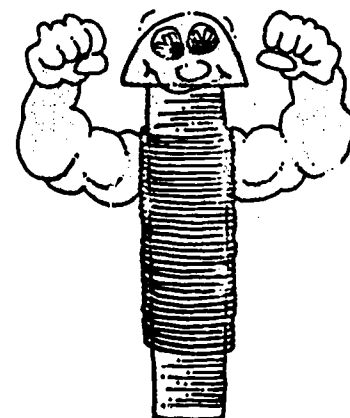

Save your electromagnet for future activities


WHAT IS THE MOST YOU CAN MAKE USING A MAGNET AND A COIL?

4.

MATERIALS:

Electric meter from Activity 2
Small bar magnet, masking tape, fine
sandpaper
3 Meters # 24 enameled copper wire

Do this first:

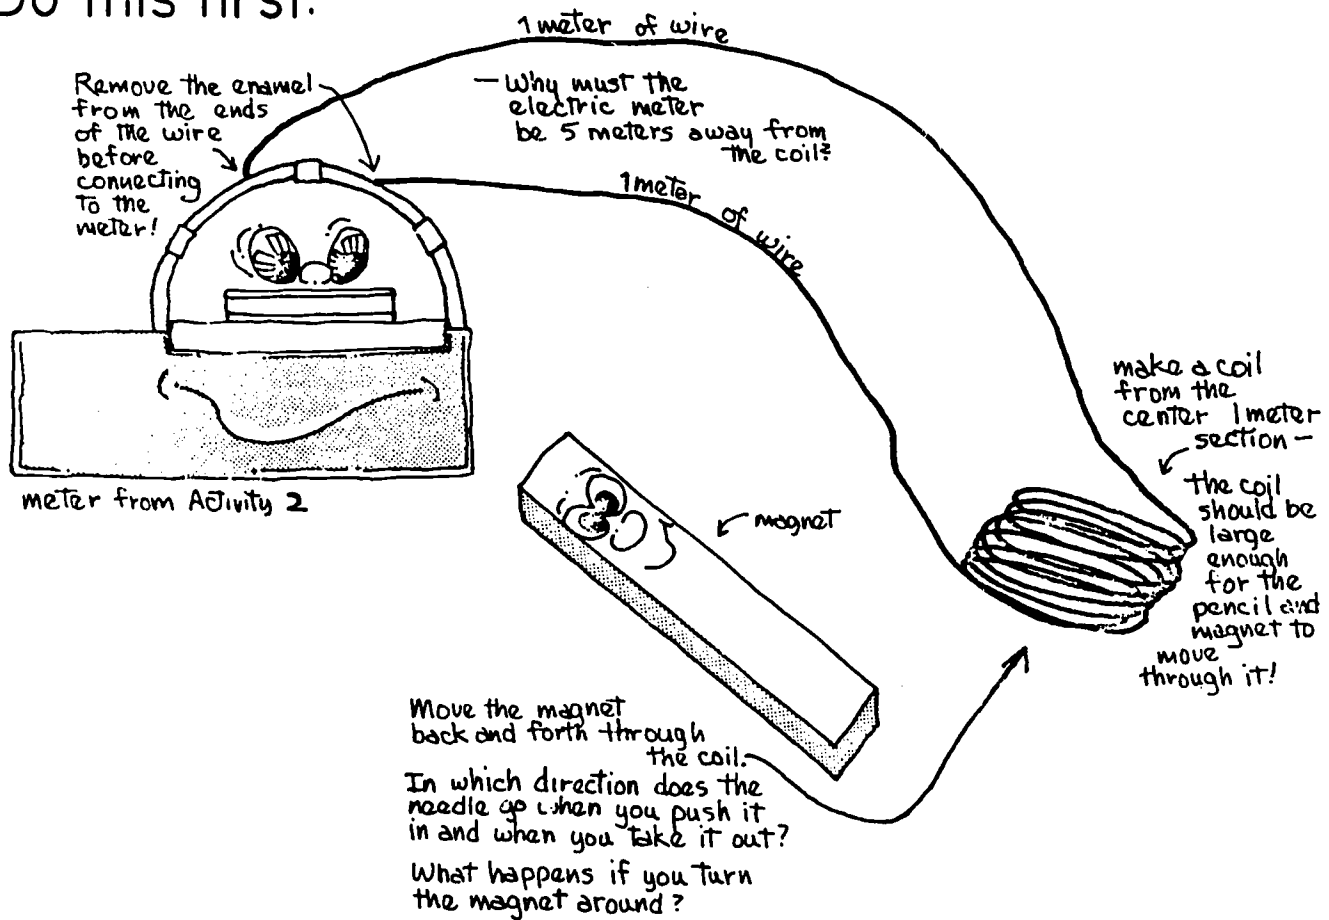

What happens to the compass needle? Try any way you can think of to make the needle swing. How far can you make it go?

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 10 Low Voltage Circuit

Instructor Plan

Student Objectives:


- State the uses of low voltage circuits in residential wiring and other applications.
- State the procedure in wiring a signal circuit.
- Name three different types of signal devices used in residential wiring.
- List the equipment and supplies needed for wiring a low voltage signal circuit.

Use of low voltage circuits

- a. Used in residential dwellings
- b. Used in office buildings
- c. Used in industrial plants

Procedures in wiring signal circuits

- a. Three rules for wiring signal circuits
 - a1. Connect a conductor to one side of source to signal device.
 - a2. Connect a conductor from other side of source to pushbutton or control point.
 - a3. Connect a conductor from pushbutton to signal device.
 - a4. Diagram

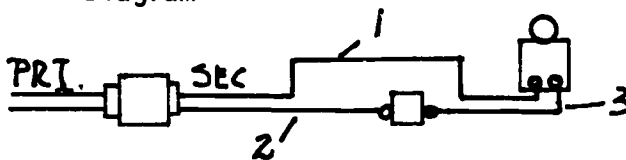

Operation of signal devices

- a. Vibrating bell
- b. Buzzer
- c. Door chimes
 - c1. Single-tone
 - c2. Two-tone
 - c3. Multi-tone

-2-

Signal circuit equipment

a. Transformers

- a1. Voltage rating
- a2. Volt-ampere rating

b. Wire/conductor

c. Pushbutton

NEC requirement

a. Article 725

Student Application

a. Construct a low voltage circuit

ASSIGNMENT SHEET

NAME: _____
 DATE: _____
 GRADE: _____


LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 10 LOW VOLTAGE CIRCUITS

Objective: Install wiring using low voltage equipment.

PLAN

1. Complete the wiring diagram on the right.
2. Have instructor check diagram. OK ____.
3. Complete material list and cost in classroom using materials catalog.
4. Gather materials in shop and complete wiring on board.
5. Have instructor check wiring before energizing circuit. OK ____.
6. Replace all materials from project to it's proper storage.
7. Answer questions listed below.
8. Turn project sheet to instructor for grade.

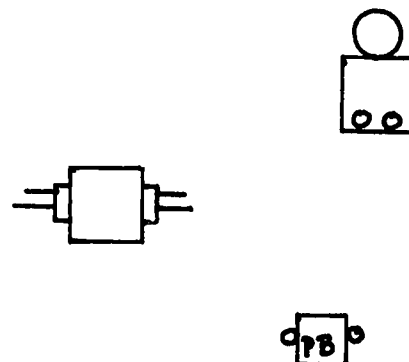WIRING DIAGRAMMATERIALS - LIST THEM DOWN ACCORDING TO CATALOG NAMES

- | | | |
|----|-----|-----|
| 1. | 6. | 11. |
| 2. | 7. | 12. |
| 3. | 8. | 13. |
| 4. | 9. | 14. |
| 5. | 10. | 15. |

QUESTIONS:

1. What size conductors are normally used in this type of wiring?
2. Does the Code cover Low Voltage Wiring? State your evidence.
3. If the resistance of the chimes is 3 ohms, what would the current be? Work your problem on this sheet.

LESSON PLAN

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 11 USE AND CARE OF TEST INSTRUMENTS AND EQUIPMENT

Instructor Plan

Student Objectives:

1. State the importance of proper handling and transporting of meters.
2. Describe the reason for zeroing the meter.
3. Demonstrate the use of each scale on a meter.
4. Distinguish between positive terminals and negative terminals either through color code or symbols.
5. Demonstrate the ability to safely and properly measure voltage across a load.

Introduction:

Importance of knowing what to do before selecting and using any test instrument or equipment.

Importance of safety procedure.

Importance of reading manual before operating instrument.

1. Handling and transporting meters

- 1.1 Expensive and delicate instrument
- 1.2 The heart of an electrician
- 1.3 Set selector switch for "off" or "transit" when not in use
- 1.4 Demonstrate

2. Zeroing the meter

- 2.1 Accuracy: Always zero meter before using
- 2.2 Zero meter when changing scale (accuracy)
- 2.3 Always observe meter movement
- 2.4 Demonstrate zeroing in of meter (Ohm/resistance scale)

4. Scale setting/range selection

- 4.1 Predetermine reading and set scale to highest range
- 4.2 Before testing, predetermine where pointer should point
- 4.3 Observe meter movement
- 4.4 Demonstrate range selection on live circuit

5. Identifying polarity

- 5.1 Observe polarity when measuring DC sources

- 5.2 Red leads for positive and black leads for negative
- 5.3 Always double check colors of test leads
- 5.4 Demonstrate with DC batteries

6. Measuring voltage

- 6.1 Always select highest voltage range when beginning test
- 6.2 Observe meter movement
- 6.3 Select range which gives the most accurate reading
- 6.4 Always measure across the load (parallel)
- 6.5 Demonstrate with DC batteries

7. Measuring current

- 7.1 Always have meter in series with the load
- 7.2 Observe meter movement
- 7.3 Select highest range first
- 7.4 Demonstrate with amprobe on lite circuit in shop

8. Measuring resistance

- 8.1 Always zero meter first before testing
- 8.2 Observe meter movement
- 8.3 Always check for voltage first before measuring resistance
- 8.4 Always turn meter to off position or transit when not in use
- 8.5 Demonstrate with resistors

9. Proper storing

- 9.1 Always turn meter off or on transit before storing
- 9.2 Meter face should be facing up
- 9.3 Storage area should be cool and dry (humidify air if possible)
- 9.4 Do not place anything on meters
- 9.5 Demonstrate

Have students read manuals and practice taking measurements.

LESSON PLAN

LEVEL I INTRODUCTION TO ELELCTRICITY

UNIT 12 ELECTRICAL SYMBOLS

Instructor Plan:

Student Objectives:

Identify and draw the following symbols:

1. Introduction:

Used as an international language by electrical workers
 Faster to draw symbols than actual objects
 Electricians should know as many symbols as possible

a. Single pole switch

Draw symbol of a single pole switch on chalkboard
 Show actual switch to students
 Have students draw symbols in notebook. Stress neatness

b. Double pole switch

Draw a symbol of a double pole switch on chalkboard
 Show actual switch to students
 Have students draw symbols in notebook

c. Three-way switch:

Draw a symbol of a three-way switch on chalkboard
 Show actual switch to students
 Have students draw symbol in notebook

d. Four-way switch

Draw a symbol of a four-way switch on chalkboard
 Show actual switch to students
 Have students draw symbols in notebook

e. Duplex receptacle

Draw a symbol of a duplex receptacle on chalkboard
 Show actual receptacle to students
 Have students draw symbols in notebook

f. Special purpose receptacle

Draw symbol for a special purpose receptacle on chalkboard

Show dryer or range receptacle to students
Have students draw symbol in notebook

g. Split circuit receptacle

Draw a symbol of a split circuit receptacle on chalkboard
Show actual split circuit receptacle to students
Have students draw symbol in notebook

h. Clock outlet

Draw a symbol of a clock outlet on chalkboard
Show actual clock outlet to students
Have students draw clock outlet in notebook

i. Floor outlet

Draw a symbol of a floor outlet on chalkboard
Show actual floor outlet to students
Have students draw floor outlet in notebook.

j. Lighting outlet

Draw a symbol of a lighting outlet on chalkboard
Show actual lighting outlet to students
Have students draw lighting outlet in notebook

k. Lighting panel

Draw a symbol of a lighting panel on chalkboard
Show actual lighting panel to students
Have students draw symbol in notebook

l. Low voltage pushbutton

Draw a symbol of a low voltage pushbutton on chalkboard
Show actual pushbutton to students
Have students draw symbol in notebook

m. Lampholder

Draw a symbol of a lampholder on chalkboard
Show actual lampholder to students
Have students draw symbol in notebook

n. Weatherproof receptacle

Draw a symbol of a weatherproof receptacle on chalkboard
Show students actual weatherproof receptacle
Have students draw symbol in notebook

o. Fan outlet

Draw a symbol of a fan outlet on chalkboard
Show students actual fan outlet
Have students draw symbol in notebook

p. Junction box

Draw a symbol of a junction box on chalkboard
Show actual junction boxes to students
Have students draw symbol in notebook

q. Bell or Buzzer

Draw a symbol of a bell and buzzer on chalkboard
Show actual bell and buzzer to students
Have students draw symbols in notebook

r. Transformer LV

Draw a symbol of a transformer on chalkboard
Show actual transformer to students
Have students draw symbol in notebook

Review and summarize lesson with students

Administer examination

NAME: _____

DATE: _____

GRADE: _____

LEVEL I INTRODUCTION TO ELECTRICITY

UNIT 12 ELECTRICAL SYMBOLS

TEST

Draw the electrical symbols for the following items:

1. Floor outlet _____
2. Four-way switch _____
3. Lighting panel _____
4. Weatherproof receptacle _____
5. Special purpose outlet _____
6. Lampholder _____
7. Clock outlet _____
8. Junction box _____
9. Single pole switch _____
10. Three-way switch _____
11. Duplex receptacle _____
12. Lighting outlet _____
13. Low voltage pushbutton _____
14. Double pole switch _____
15. Split circuit receptacle _____

LESSON PLAN

LEVEL II ELECTRICAL PRINCIPLES AND PRACTICES

UNIT 4 INTRODUCTION TO THE NATIONAL ELECTRICAL CODE AND STANDARDS

Instructor Plan

Student Objectives:

- a. State the purpose of the NEC.
- b. Identify those areas that are covered and those that are not covered by the NEC.
- c. Explain how the code is arranged and state specific articles used in general wiring practices.
- d. Define terms used in the NEC which pertain to residential wiring.
- e. State the difference between mandatory and recommended rules and its application.
- f. State procedure for filing for a formal code interpretation.

Introduction:

Minimum standard for electrical work
 Providing a system which is essentially free from hazards
 Accepted standards by most authorities having jurisdiction
 Standard when taking a journeyman's license
 Most widely used standard

1. Purpose: Art. 90-1
 - 1.1 Practical safe guarding of persons
 - 1.2 Building and content
 - 1.3 Provide a system that is free from shorts and grounds
2. Scope: Art. 90-2
 - 2.1 Coverage of the CODE
 - a. Electric conductors
 - b. Equipment within public buildings
 - c. Industrial substations
 - d. Carnivals and yards
 - e. Dwellings, apartments, hotels, etc.
 - 2.2 Not covered
 - a. Ships
 - b. Watercrafts

- c. Railways
- d. Mines

3. Code arrangement: Art. 90-3
 - 3.1 Individual chapters (9)
 - 3.2 Chapters 1,2,3, and 4 general requirements
 - 3.3 Chapters 5,6,7 apply to special occupancies
 - 3.4 Chapter 8 deals with communications
 - 3.5 Chapter 9 deals with Tables
4. Definitions: Art. 100
 - 4.1 Define terms used more than once in Code
 - 4.2 Electrical installation dictionary
5. Fundamental rules: Art. 110
 - 5.1 "1" in the beginning of each article covers the fundamental rule for that article
 - 5.2 Mandatory statement uses the word "shall"
 - 5.3 Recommended practice uses the word "should"
6. Interpretation: Art. 90-5
 - 6.1 Procedure for formal interpretation
 - 6.2 May be necessary when there is a dispute in local interpretation
7. Enforcement: 90-4
 - 7.1 Local government
8. Examination of equipment for safety: Art. 90-6
 - 8.1 Purpose to safe guard against defective equipment
 - 8.2 Examination done be testing labs such as UL or other private testing labs.
9. Wiring planning: Art. 90-7
 - 9.1 Reasons for adequate wiring
 - 9.2 Ample size raceways being provided
 - 9.3 Allowance for future increase in the use of electricity
10. Revision of the NEC:
 - 10.1 Purpose for revision
 - 10.2 Technological changes

- 10.3 New research and findings
- 10.4 Changes made every three years
- 11. History of the NEC
 - 11.1 Student assignment and report
 - 11.2 NEC originally drawn in 1897 by insurance, electrical, architectural, and allied interests.
 - 11.3 Original CODE prepared by the National Conference of Standard Electrical Rules.
 - 11.4 1911 the National Conference was disbanded and the National Fire Protection Association (NFPA) sponsored the NEC.
 - 11.5 Page xi NATIONAL ELECTRICAL CODE HANDBOOK Sixteenth Edition.

APPENDIX D SAMPLE ATTENDANCE AND PROGRESS CHARTS

SAMPLE ATTENDANCE AND PROGRESS SHEETS

Recording Student Progress

A major principle of vocational education is that the students learn skills or the performance of operations of a trade with the production job vehicle to accomplish this objective.

The operations are defined on the shop progress record and it is imperative that the instructor have some means of recording the student experiences and achievement.

The approved method of recording student progress is as follows:



INSTRUCTED - This designation on the progress record indicates that the student has performed a skill with the assistance of and under the supervision of the instructor.



PRACTICED - This designation on the progress records indicates that the student has performed a skill either alone or with little help from the instructor.



PROFICIENT - This designation on the progress record indicates that the student is capable of performing a skill alone within a reasonable amount of time with no assistance from the instructor. In effect this implies that the student has been tested for that skill.

This method of noting student progress will define accurately student achievement and in fact will point out any weaknesses the student may have in certain operations; thus highlighting areas where the student may need help.

Grades should be kept on student daily progress cards or in roll books.

NOTES

Grade Year Instructor

[illegible]

PROGRESS RECORD INDEX

LEVEL I

CAREER ORIENTATION
SHOP ORIENTATION
SAFETY
USE AND CARE OF ELECTRICAL WIRING TOOLS
SOURCES OF ELECTRICITY
ELECTRICAL DISTRIBUTION
BASIC ELECTRICITY DC
MAGNETISM
ELECTRICAL DIAGRAMS
LOW VOLTAGE CIRCUITS
USE AND CARE OF TEST INSTRUMENTS AND EQUIPMENT
IDENTIFYING ELECTRICAL SYMBOLS
ELECTRICAL CONDUCTORS AND INSULATORS
ELECTRICAL TERMINATIONS
ELECTRICAL WIRING DEVICES AND MATERIALS
GUEST SPEAKERS
FIELD TRIPS

LEVEL II

SHOP ORIENTATION
SAFETY
BASIC ELECTRICAL THEORY AC
INTRODUCTION TO THE NEC AND STANDARDS
ELECTRICAL BLUEPRINT READING
ELECTRICAL TERMINATIONS
ELECTRICAL DIAGRAMS
ELECTRICAL WIRING DEVICES AND MATERIALS
OVERCURRENT PROTECTION
WIRING METHODS
GROUNDING
ELECTRICAL SERVICE SYSTEMS
TROUBLESHOOTING PROCEDURES
GUEST SPEAKERS
FIELD TRIPS

LEVEL III

SAFETY
PLANNING AND LAYING OUT ELECTRICAL CIRCUITS
ELECTRICAL SYSTEM ANALYSIS
ADVANCED INTERPRETATION OF THE NATIONAL ELECTRICAL CODE
WIRING A RESIDENTIAL UNIT/DWELLING
LIGHTING FIXTURES
RENOVATION AND TROUBLESHOOTING
JOB ACQUISITION SKILLS
ADVANCED ELECTRICAL WIRING
GUEST SPEAKERS
FIELD TRIPS

PROGRESS CHART

INTRODUCTION TO
ELECTRICITY

LEVEL I

NAME

1	UNIT 1
2	a. Job des.
3	b. Entry level requirement
4	c. Job ethics
5	d. Working condition
6	e. Job opportunity
7	UNIT 2
8	a. Shop policy
9	b. Intro to course content
10	c. Grading policy
11	d. Books and references
12	e. Shop layout
13	f. Location of tools
14	UNIT 3
15	a. Safety program
16	b. First aid
17	c. Ventilation and lighting
18	d. Material handl.
19	e. Location of fire extinguishers
20	UNIT 4
21	a. screw driver
22	b. Phillips screw driver
23	c. Knife
24	d. Diagonal pliers
25	e. Longnose pliers
26	f. Side cutters
27	g. Channel lock pliers
28	h. Torpedo level
29	i. Tape rule
30	j. Folding rule
31	k. Chisels
32	l. Hammer
33	m. Keyhole saw
34	n. Wire stripper
35	o. Hack saw
36	p. Vise-grip pliers
37	q. Tool pouch
38	r. Fish tape
39	s. Portable elec. drill
40	

PROGRESS CHART

INTRODUCTION TO
ELECTRICITY

LEVEL I

NAME

UNIT 5
1 a. Friction

2 b. Chemical

3 c. Magnetic

4 d. Pressure

5 e. Light

6 f. Heat

7 9. Electricity

UNIT 6

8 a. Power plant

9 b. Transmission

10 c. Distribution

11 d. Services

12 e. Feeder lines

UNIT 7

13 a. Electron theory

14 b. Atomic theory

15 c. Batteries

16 d. Conductivity of

17 e. Ohm's Law

18 f. Series circuit

19 9. Parallel

20 h. Combination

21 i. Watts

UNIT 8

22 a. Lab. of Mag.

23 b. Electro-

24 c. DC Generator

UNIT 9

25 a. Schmetic dia.

26 b. Wiring

27 a. Use of L.V.

28 b. Procedure in

29 c. Operation of

30 d. Signal circuit

31 a. Handling and tr

32 b. Zeroing the

33 c. Scale setting

34 d. Identifying

35 e. measuring

36 voltage

LEVEL 1

PROGRESS CHART		INTRODUCTION TO ELECTRICITY		LEVEL 1		NAME	
	f.	Measuring current					
	g.	Measuring resistance					
	h.	Storing					
	UNIT 12						
	a.	Single pole sw					
	b.	Double pole sw					
	c.	Three-way switch					
	d.	Four-way switch					
	e.	Duplex receptacle					
	f.	Special purpose receptacle					
	g.	Split circuit receptacle					
	h.	Clock outlet					
	i.	Floor outlet					
	j.	Lighting outlet					
	k.	Lighting panel					
	l.	L.V. pushbutton					
	m.	Lampholder					
	n.	Weatherproof receptacle					
	o.	Fan outlet					
	p.	Junction box					
	q.	Bell or buzzer					
	r.	Transformer					
	UNIT 13						
	a.	Imp cond./ins. conductor					
	b.	Resistance					
	c.	Conductor materials					
	d.	Length of conductors					
	e.	Sizing					
	f.	Ampacity					
	g.	Use of tables and charts					
	UNIT 14						
	a.	Pigtail splice					
	b.	Tee splice					
	c.	Western union splice					
	d.	Terminal screw connection					
	e.	Solderless connections					
	f.	Reinsulating splices					
	UNIT 15						
	a.	Classification					

APPENDIX D

PROGRESS CHART INTRODUCTION TO ELECTRICITY LEVEL I NAME		1 b. Switches	2 c. Receptacles	3 d. Lampholders	4 e. Junction boxes	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
1																																					
2																																					
3																																					
4																																					
5																																					
6																																					
7																																					
8																																					
9																																					
10																																					
11																																					
12																																					
13																																					
14																																					
15																																					
16																																					
17																																					
18																																					
19																																					
20																																					
21																																					
22																																					
23																																					

PROGRESS CHART

ELECTRICAL
PRINCIPLES AND
PRACTICES

LEVEL II

NAME _____

	UNIT 1	UNIT 2	UNIT 3	UNIT 4	UNIT 5
1	1 a. Shop policy	7 a. Safety program	12 a. Uses of AC curr	20 a. purpose of NEC	31 a. Intro to blueprt
2	2 b. Intro to course content	8 b. First aid	13 b. Cycle	21 b. Scope	32 b. Material description
3	3 c. Grading policy			22 c. Code arrangement	33 c. Scales
4	4 d. Books and references			23 d. Definition	34 d. types of drawings
5	5 e. Shop layout			24 e. Fundamental rules	35 e. Calculation
6	6 f. Location of tools			25 f. Interpretation	
7				26 g. Enforcement	
8				27 h. Exam of equip. for safety	
9				28 i. Wiring planning	
10				29 j. Revision of the NEC	
11				30 k. History of the NEC	
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					
34					
35					
36					

PROGRESS CHART ELECTRICAL PRINCIPLES AND PRACTICES

LEVEL II

NAME

PROGRESS CHART	
ELECTRICAL PRINCIPLES AND PRACTICES	
LEVEL II	
NAME	
1	UNIT 6
2	1 a. Types of splices
3	2 b. Reinsulating
4	3 c. Soldering irons and guns
5	4 d. Use of crimping tools
6	5 e. Prep conductors for termination
7	6 f. Use of terminal clips
8	7 g. Use of wire nuts
9	8 h. Use of split-bolt connectors
10	UNIT 7
11	9 a. Use of diagrams
12	10 b. Symbols
13	11 c. Single pole switch
14	12 d. Three-way switching
15	13 e. Four-way switching
16	14 f. Lighting circuit
17	15 g. Combo Switch and pilot lite
18	UNIT 8
19	16 a. Definition
20	17 b. Switches
21	18 c. Receptacles
22	19 d. Lampholders
23	20 e. Junction boxes
24	21 f. Panelboards
25	22 g. Conductors
26	23 h. Cables
27	24 i. Raceways
28	25 j. Cords
29	26 k. Attachment caps
30	27 l. Fasteners
31	UNIT 9
32	28 a. Purpose
33	29 b. Types of over-current protect
34	30 c. Selection
35	31 d. Usage
36	UNIT 10
	32 a. Raceways
	33 b. Cables
	34 c. Select. & appli. wiring method
	35
	36

LEVEL II

NAME

UNIT 11	1 a. Purpose	2 b. Types of grounding	3 c. Methods of grounding	4 d. Bonding	5 e. Selecting grd. & bonding cond.	6 f. NEC requirements
UNIT 12	7 a. Types of service	8 b. Parts of the service	9 c. Calculating service	10 d. Selecting ser. entrance mat.	11 e. Installing services	12 f. NEC requirement
UNIT 13	13 a. Analz elec. sys	14 b. Determine malfunction	15 c. Restoring Problem	16 d. Retest	17 FIELD TRIP	
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						
31						
32						
33						
34						
35						
36						

NAME

[illegible]

APPENDIX E HANDOUTS

219

HANDOUT 1

Electrical Symbols Commonly Used on Blueprints

GENERAL OUTLETS

Ceiling	Wall	
○	—○	Outlet.
⊖	—⊖	Blanked Outlet.
⓪		Drop Cord.
Ⓢ	—Ⓢ	Electrical Outlet; for use only when circle used alone might be confused with columns, plumbing symbols, etc.
Ⓢ	—Ⓢ	Fan Outlet.
ⓐ	—ⓐ	Junction Box.
ⓐ	—ⓐ	Lamp Holder.
ⓐ _s	—ⓐ _s	Lamp Holder with Pull Switch.
Ⓢ	Ⓢ	Pull Switch.
Ⓢ	—Ⓢ	Outlet for Vapor Discharge Lamp.
Ⓢ	—Ⓢ	Exit Light Outlet.
Ⓢ	—Ⓢ	Clock Outlet. (Specify Voltage.)

CONVENIENCE OUTLETS

Ⓢ	Duplex Convenience Outlet.
Ⓢ _{1,3}	Convenience Outlet other than Duplex. 1=Single, 3=Triplex, etc.
Ⓢ _{WP}	Weatherproof Convenience Outlet.
Ⓢ _R	Range Outlet.
Ⓢ	Switch and Convenience Outlet.
Ⓢ _R	Radio and Convenience Outlet.
Ⓢ	Special Purpose Outlet. (Des. in Spec.)
Ⓢ	Floor Outlet.

SWITCH OUTLETS

S	Single Pole Switch.
S ₂	Double Pole Switch.
S ₃	Three-Way Switch.
S ₄	Four-Way Switch.
S ₀	Automatic Door Switch.
S _E	Electroliner Switch.
S _K	Key Operated Switch.
S _P	Switch and Pilot Lamp.
S _{CB}	Circuit Breaker.
S _{WCB}	Weatherproof Circuit Breaker.
S _{MC}	Momentary Contact Switch.
S _{RC}	Remote Control Switch.
S _{WP}	Weatherproof Switch.
S _F	Fused Switch.
S _{WF}	Weatherproof Fused Switch.

SPECIAL OUTLETS

○_{a,b,c,etc} Any Standard Symbol as given above with the addition of a lower case subscript letter may be used to designate some special variation of Standard Equipment of particular interest in a specific set of Architectural Plans. When used, they must be listed in the Key of Symbols on each drawing and if necessary further described in the specifications.

Courtesy of American Standards Association
of New York, N.Y.

PANELS, CIRCUITS, AND MISCELLANEOUS

Ⓢ	Lighting Panel.
Ⓢ	Power Panel.
—	Branch Circuit; Concealed in Ceiling or Wall.
---	Branch Circuit; Concealed in Floor.
----	Branch Circuit; Exposed.
→	Home Run to Panel Board. Indicate number of Circuits by number of arrows. Note: Any circuit without further designation indicates a two-wire circuit. For a greater number of wires indicate as follows --#-- (3 wires) ## (4 wires), etc.
•	Feeders. Note: Use heavy lines and designate by number corresponding to listing in Feeder Schedule.
Ⓢ	Underfloor Duct and Junction Box. Triple System. For double or single systems, eliminate 1 or 2 lines. This symbol equally adaptable to auxiliary system layouts.


Ⓢ	Generator.
Ⓢ	Motor.
Ⓢ	Instrument.
Ⓢ	Power Transformer. (Or draw to scale.)
Ⓢ	Controller.
Ⓢ	Isolating Switch.

AUXILIARY SYSTEMS

Ⓢ	Push Button.
Ⓢ	Buzzer.
Ⓢ	Bell.
Ⓢ	Annunciator.
Ⓢ	Outside Telephone.
Ⓢ	Interconnecting Telephone.
Ⓢ	Telephone Switchboard.
Ⓢ	Bell Ringing Transformer.
Ⓢ	Electric Door Opener.
Ⓢ	Fire Alarm Bell.
Ⓢ	Fire Alarm Station.
Ⓢ	City Fire Alarm Station.
Ⓢ	Fire Alarm Central Station.
Ⓢ	Automatic Fire Alarm Device.
Ⓢ	Watchman's Station.
Ⓢ	Watchman's Central Station.
Ⓢ	Horn.
Ⓢ	Nurse's Signal Plug.
Ⓢ	Maid's Signal Plug.
Ⓢ	Radio Outlet.
Ⓢ	Signal Central Station.
Ⓢ	Interconnection Box.
Ⓢ	Battery.

Auxiliary System Circuits.

Note: Any line without further designation indicates a 2-Wire System. For a greater number of wires designate with numerals in manner similar to ---12-No. 18W-4" C., or designate by number corresponding to listing in Schedule. Special Auxiliary Outlets. Subscript letters refer to notes on plans or detailed description in specs.

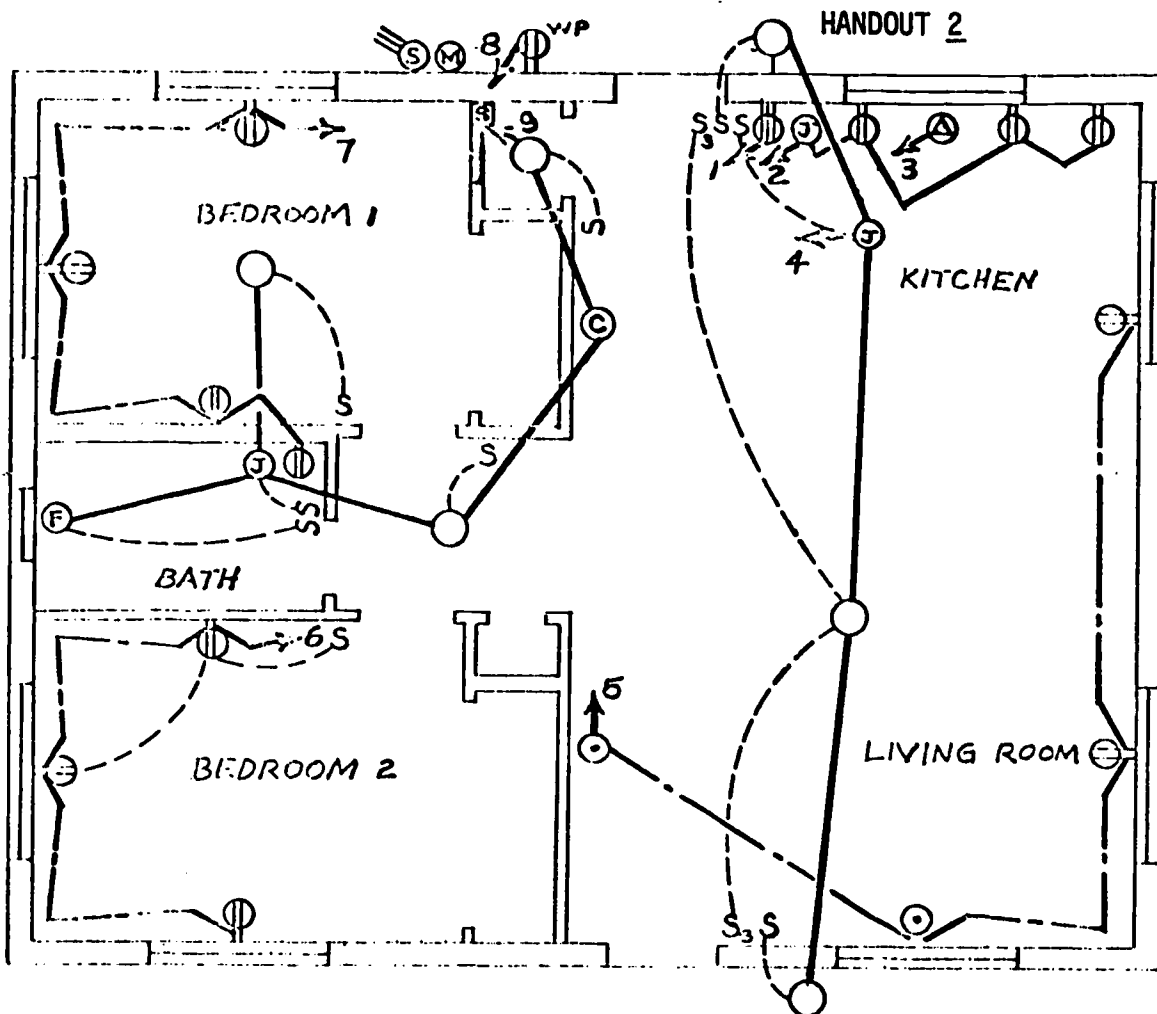


- | | |
|-------------------------------------|---|
| (M) METER | ----- BRANCH CIRCUIT CONCEALED IN CEILING |
| (○) LIGHTING OUTLET | ----- CONTROLS OUTLET |
| (⊙) CLOCK OUTLET | ----- BRANCH CIRCUIT CONCEALED IN FLOOR |
| (J) JUNCTION BOX | S SINGLE-POLE SWITCH |
| (⊙) SPECIAL OUTLET | S ₃ THREE-WAY SWITCH |
| (⊖) DUPLEX OUTLET | [] FLUORESCENT FIXTURE |
| (⊖) _{WP} WATERPROOF OUTLET | (SD) SERVICE DROP |
| (⊖) _R RANGE OUTLET | → HOME RUN TO PANEL |
| (⊙) FLOOR OUTLET | [S] SAFETY SWITCH |
| (F) FAN OUTLET | [DP] DISTRIBUTION PANEL |

ELECTRICAL

PRINCIPAL PARTS
WIRING SYSTEM

HANDOUT 3

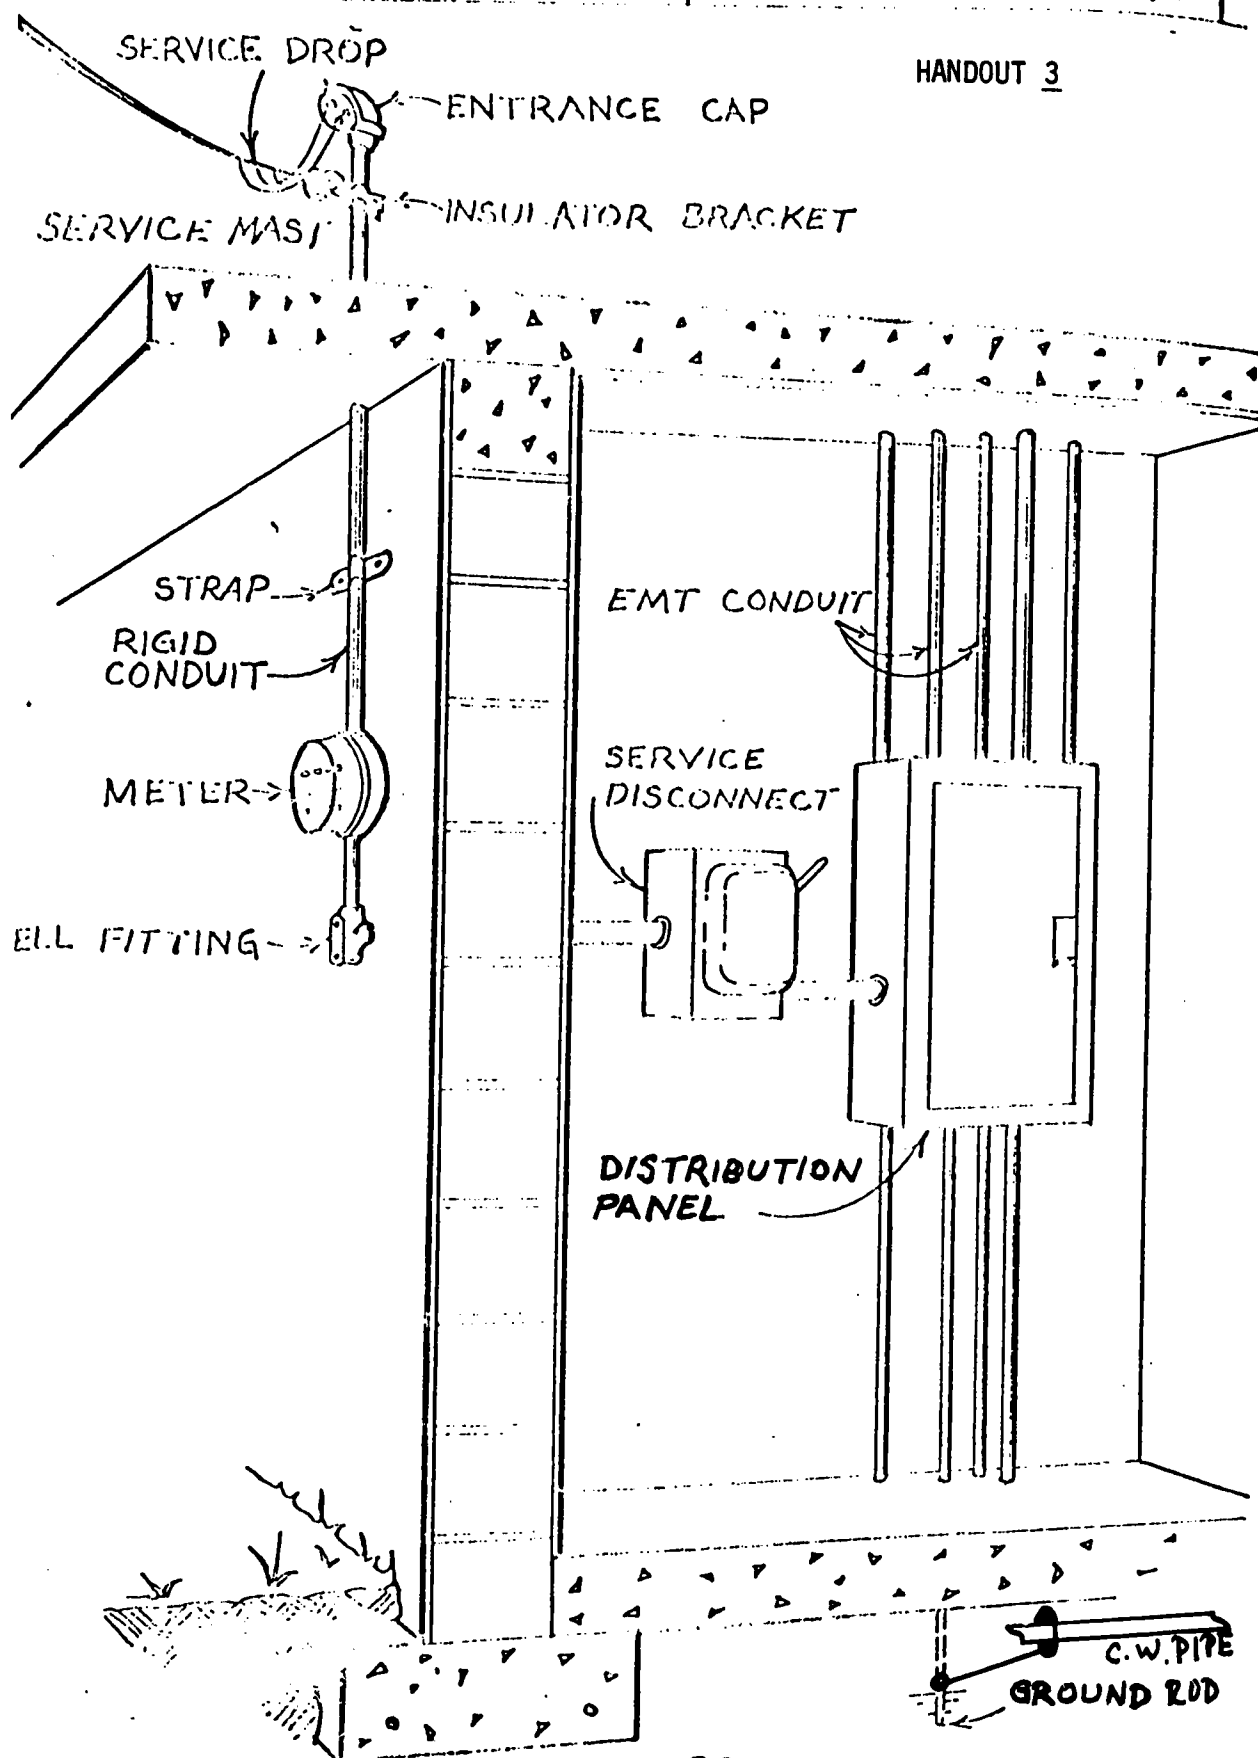

ELECTRICAL

RISER DIAGRAM

HANDOUT 4



SINGLE PHASE
120/240 VOLTS
3 WIRE, 100 AMPERE
SERVICE





SERVICE DROP

METER


SERVICE
DISCONNECT

RANGE
BEDROOM
BATH
SPARE
SPARE

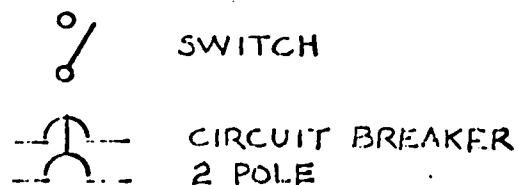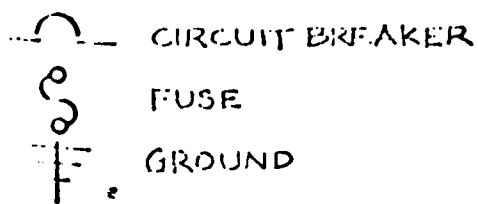
DISTRIBUTION
PANELBOARDGROUND ROD
& C.W. PIPE

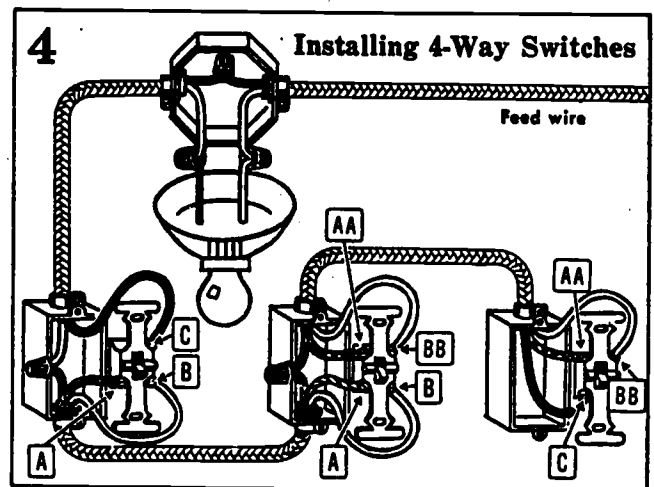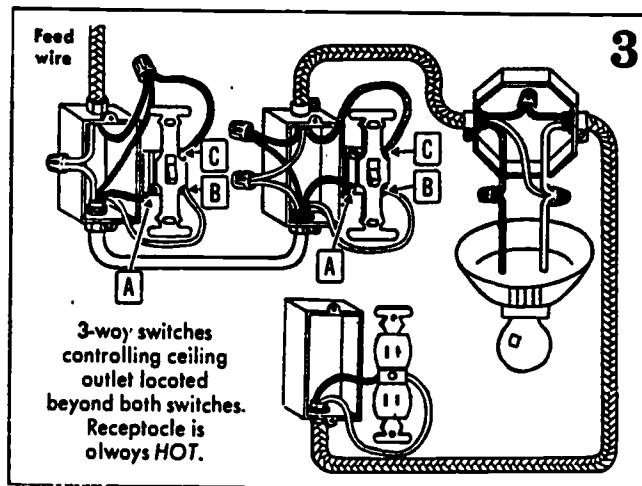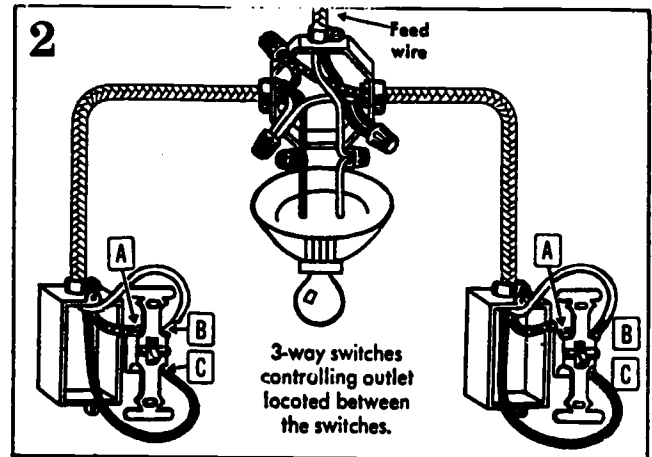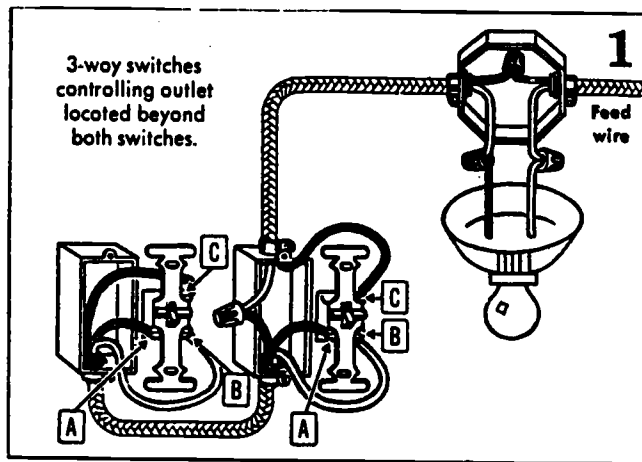HANDOUT 5


NOTE: This is a wiring method utilizing cables. On three wire cables, the red conductor is designated by black tracers.

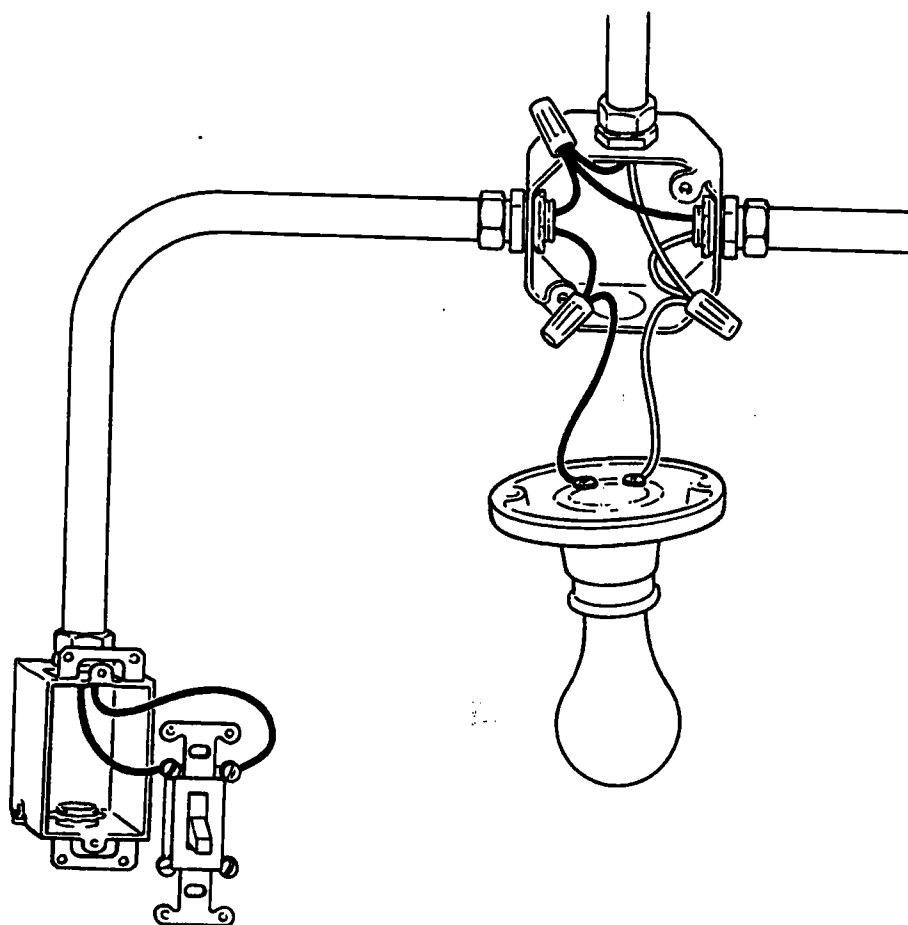HANDOUT 6


NOTE: A single pole switch controlling a light with source at lighting outlet. In raceway wiring, all conductors to switches are colored. White conductors are not allowed to be connected to switches.

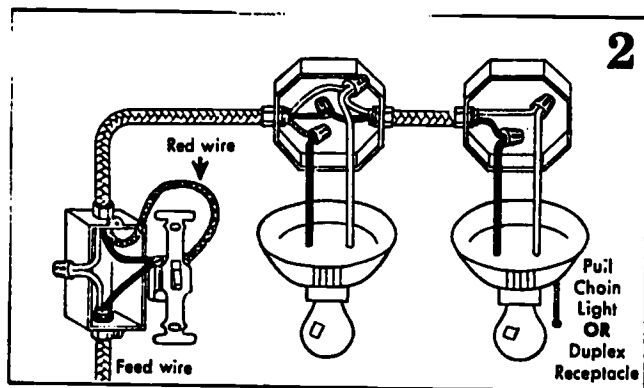


To install two ceiling lights on same line; one controlled by switch

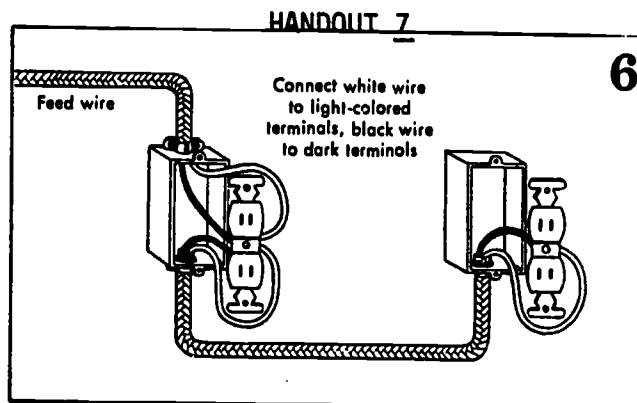


To add new convenience outlets beyond old convenience outlets

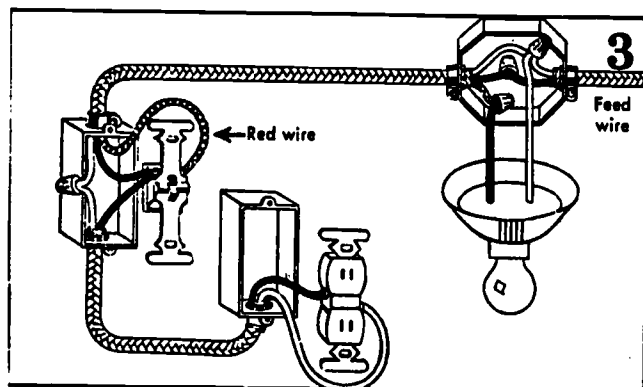


To add a switch and convenience outlet beyond existing ceiling light

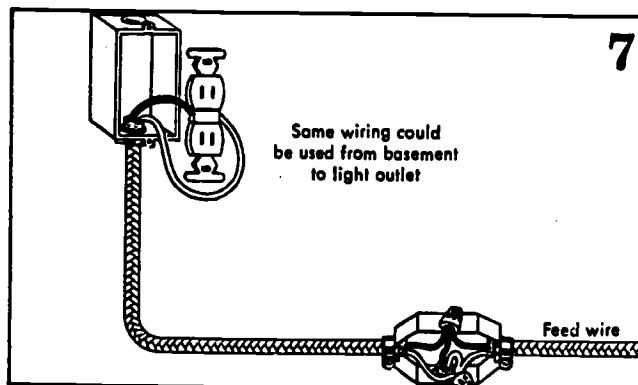


To add a new convenience outlet from an existing junction box

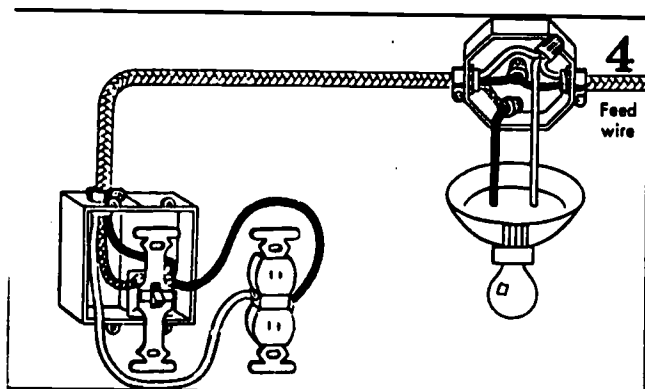


To add a switch and convenience outlet in one outlet box beyond existing ceiling light

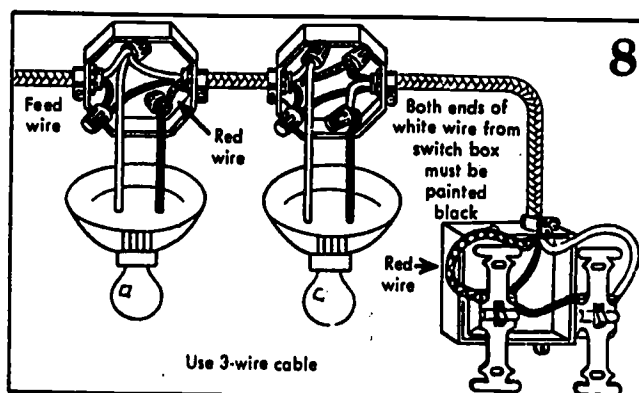

To install one new ceiling outlet and two new switch outlets from existing ceiling outlet

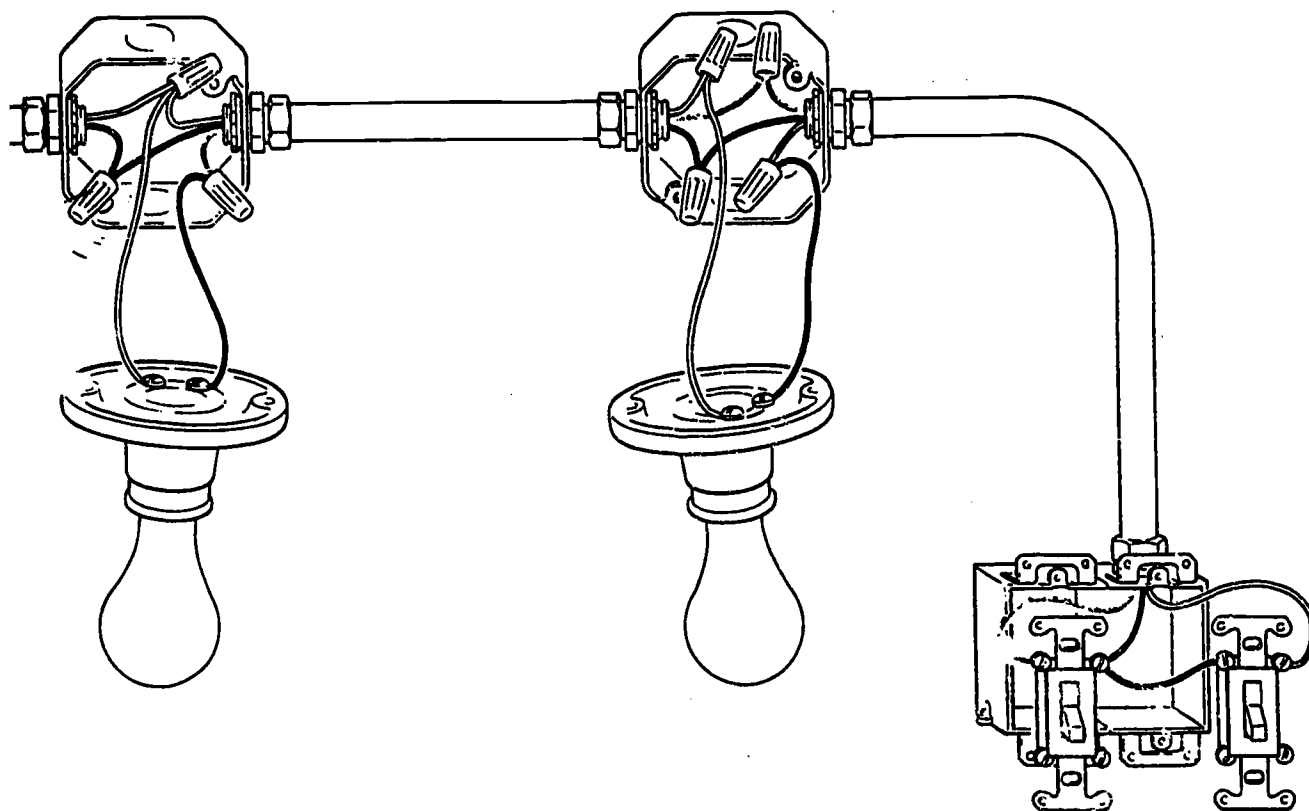


Two ceiling lights controlled by individual switches. (2 gang switch)

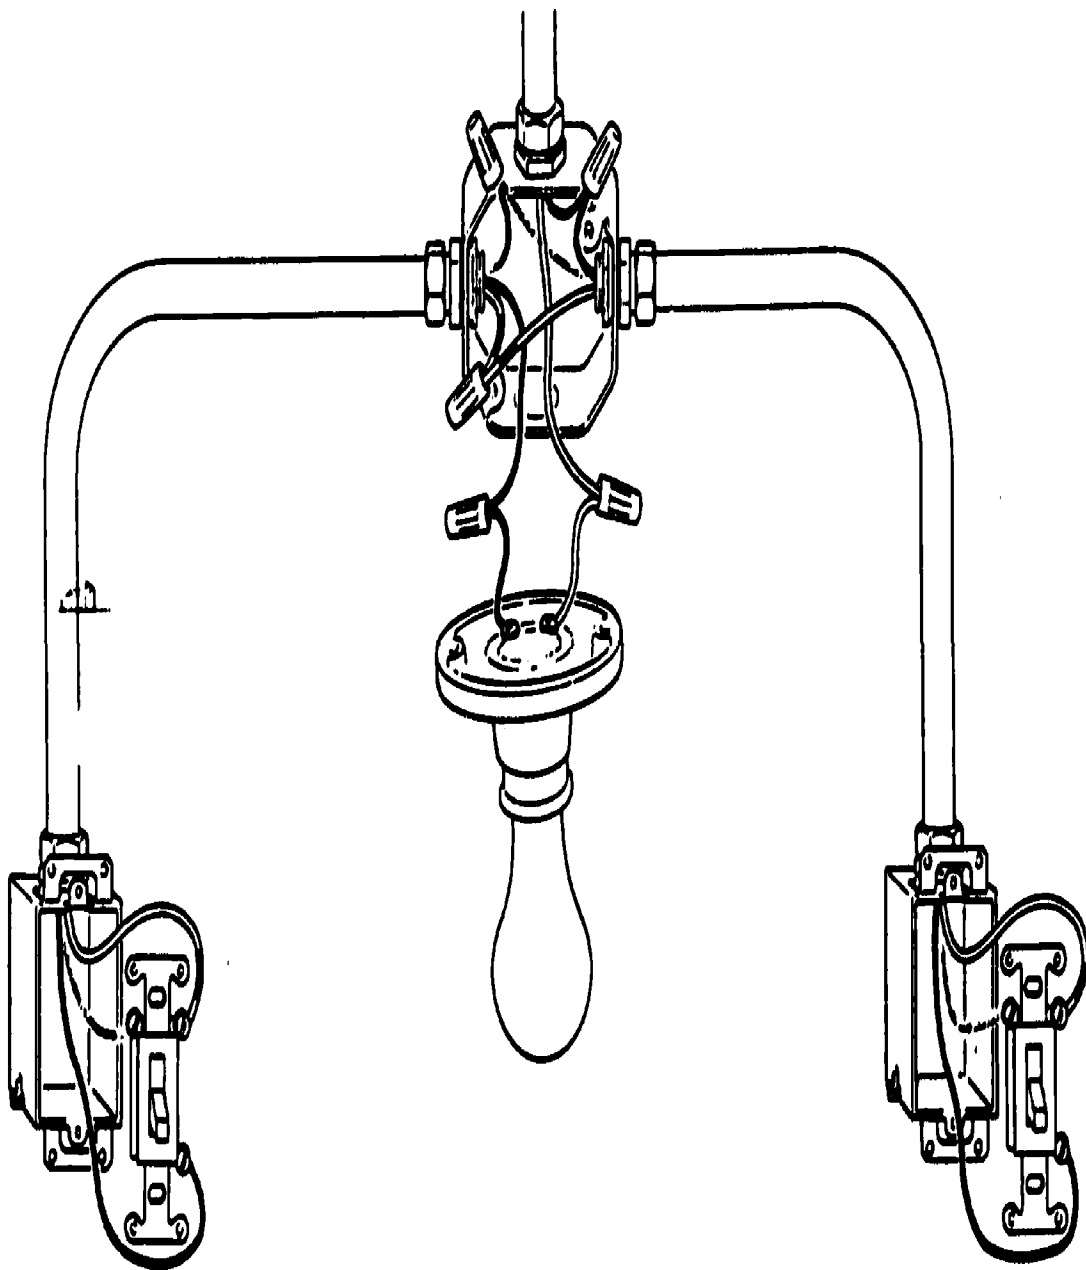

Two three-way switches controlling one light. (raceway wiring)

HANDOUT 9



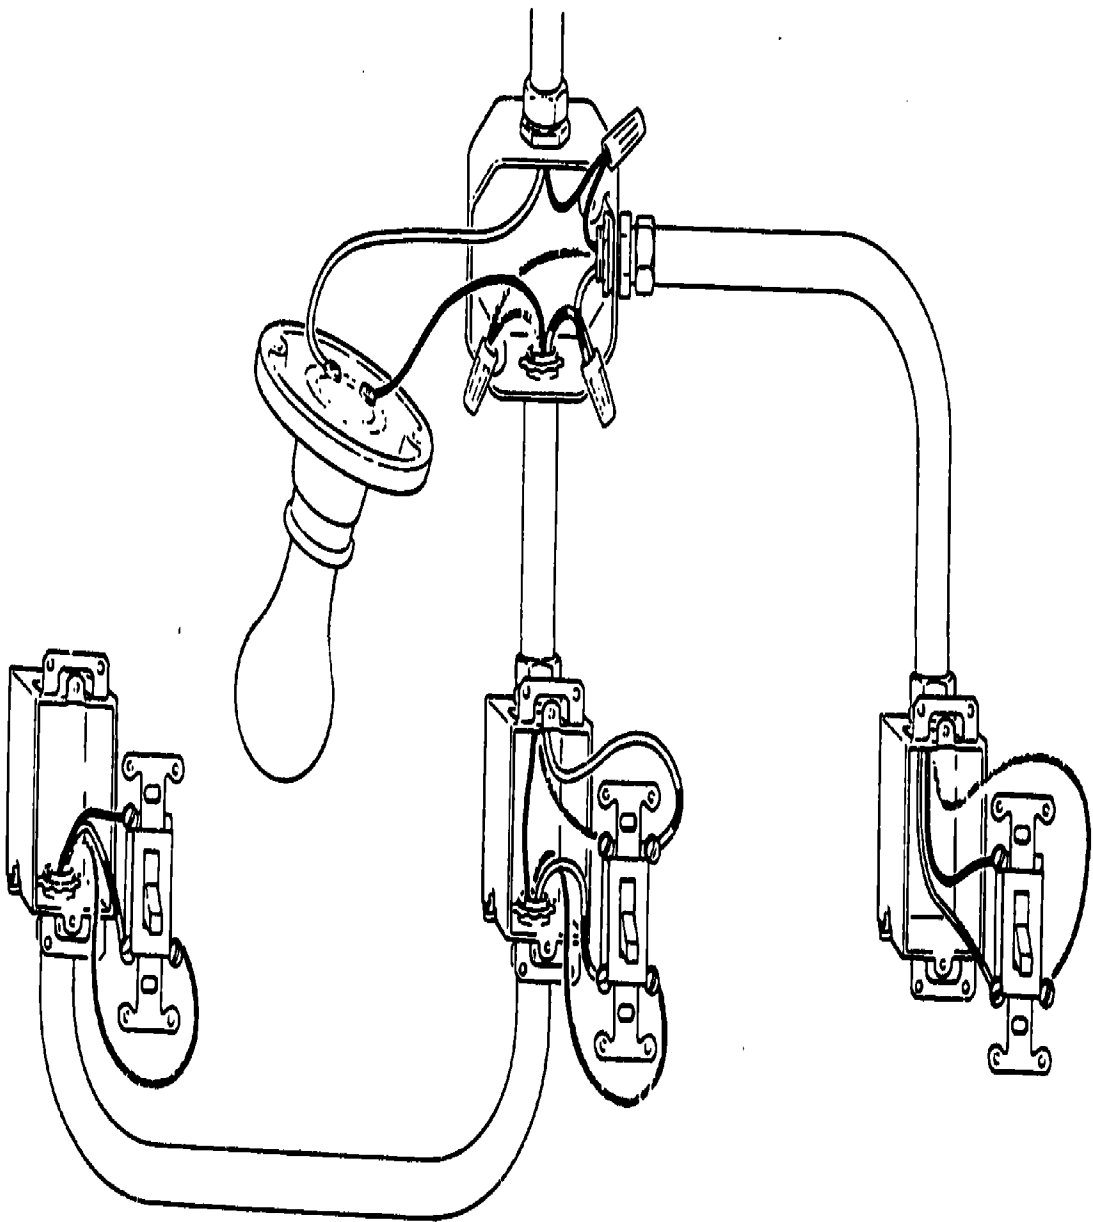












231



One four-way and two three-way switches controlling one light. (raceway wiring)

230

HANDOUT 11

KIND OF FIRE		APPROVED TYPE OF EXTINGUISHER						
DECIDE THE CLASS OF FIRE YOU ARE FIGHTING...	...THEN CHECK THE COLUMNS TO THE RIGHT OF THAT CLASS	MATCH UP PROPER EXTINGUISHER WITH CLASS OF FIRE SHOWN AT LEFT Important! Using the wrong type extinguisher for the class of fire may be dangerous.						
		FOAM Solution of Aluminum Sulphate and Bicarbonate of Soda	CARBON DIOXIDE Carbon Dioxide Gas Under Pressure	SODA ACID Bicarbonate of Soda Solution and Sulphuric Acid	PUMP TANK Plain Water	GAS CARTRIDGE Water Expelled by Carbon Dioxide Gas	MULTI-PURPOSE DRY CHEMICAL	ORDINARY DRY CHEMICAL
 CLASS A FIRES Use These Extinguishers ORDINARY COMBUSTIBLES • Wood • Paper • Cloth, Etc.								
 CLASS B FIRES Use These Extinguishers FLAMMABLE LIQUIDS, GREASE • Gasoline • Paints • Oils, Etc.								
 CLASS C FIRES Use These Extinguishers ELECTRICAL EQUIPMENT • Motors • Switches, Etc.								

SAFE SHOP PRACTICESHANDOUT 12

1. Keep hands off all equipment unless assigned to work with.
2. De-energize all circuits before making repairs.
3. Use lockout switches and danger signs when working on circuits.
4. Cut only one electrical wire at a time. Neutral, then ground last.
5. Test all circuits before working on them.
6. Use fuse pullers for removing and replacing cartridge fuses.
7. Fuse all circuits according to code requirements.
8. Repair all circuit defects before replacing fuses.
9. Never leave untaped wires in junction boxes.
10. Set all ladders properly before climbing them.
11. Use proper length ladder for each job. Top on ladder above knees.
12. Never leave tools on ladders.
13. Keep hands off all moving equipment such as belts and pulleys.
14. Leave hot soldering irons on proper rack for cooling.
15. Use tools for jobs they are designed for.
16. Wear goggles for all jobs that create eye hazards.
17. Ground all portable electric equipment.
18. Use proper materials for each job installation.
19. Abide by the National Electrical Code regulations for all electrical work.

FOLLOW ALL SAFETY RULES AND REGULATIONS...

SAMPLE RESUME

HANDOUT 17

LEVEL III UNIT 8 JOB ACQUISITION SKILLS

NAME:

ADDRESS:

TELEPHONE:

PERSONAL:

Date of Birth:

Place of Birth:

Height:

Weight:

Marital Status:

Health:

OCCUPATIONAL OBJECTIVE:

EDUCATION:


HONORS AND ACTIVITIES:

WORK EXPERIENCE:

COMMUNITY SERVICE:

HOBBIES:


REFERENCE:

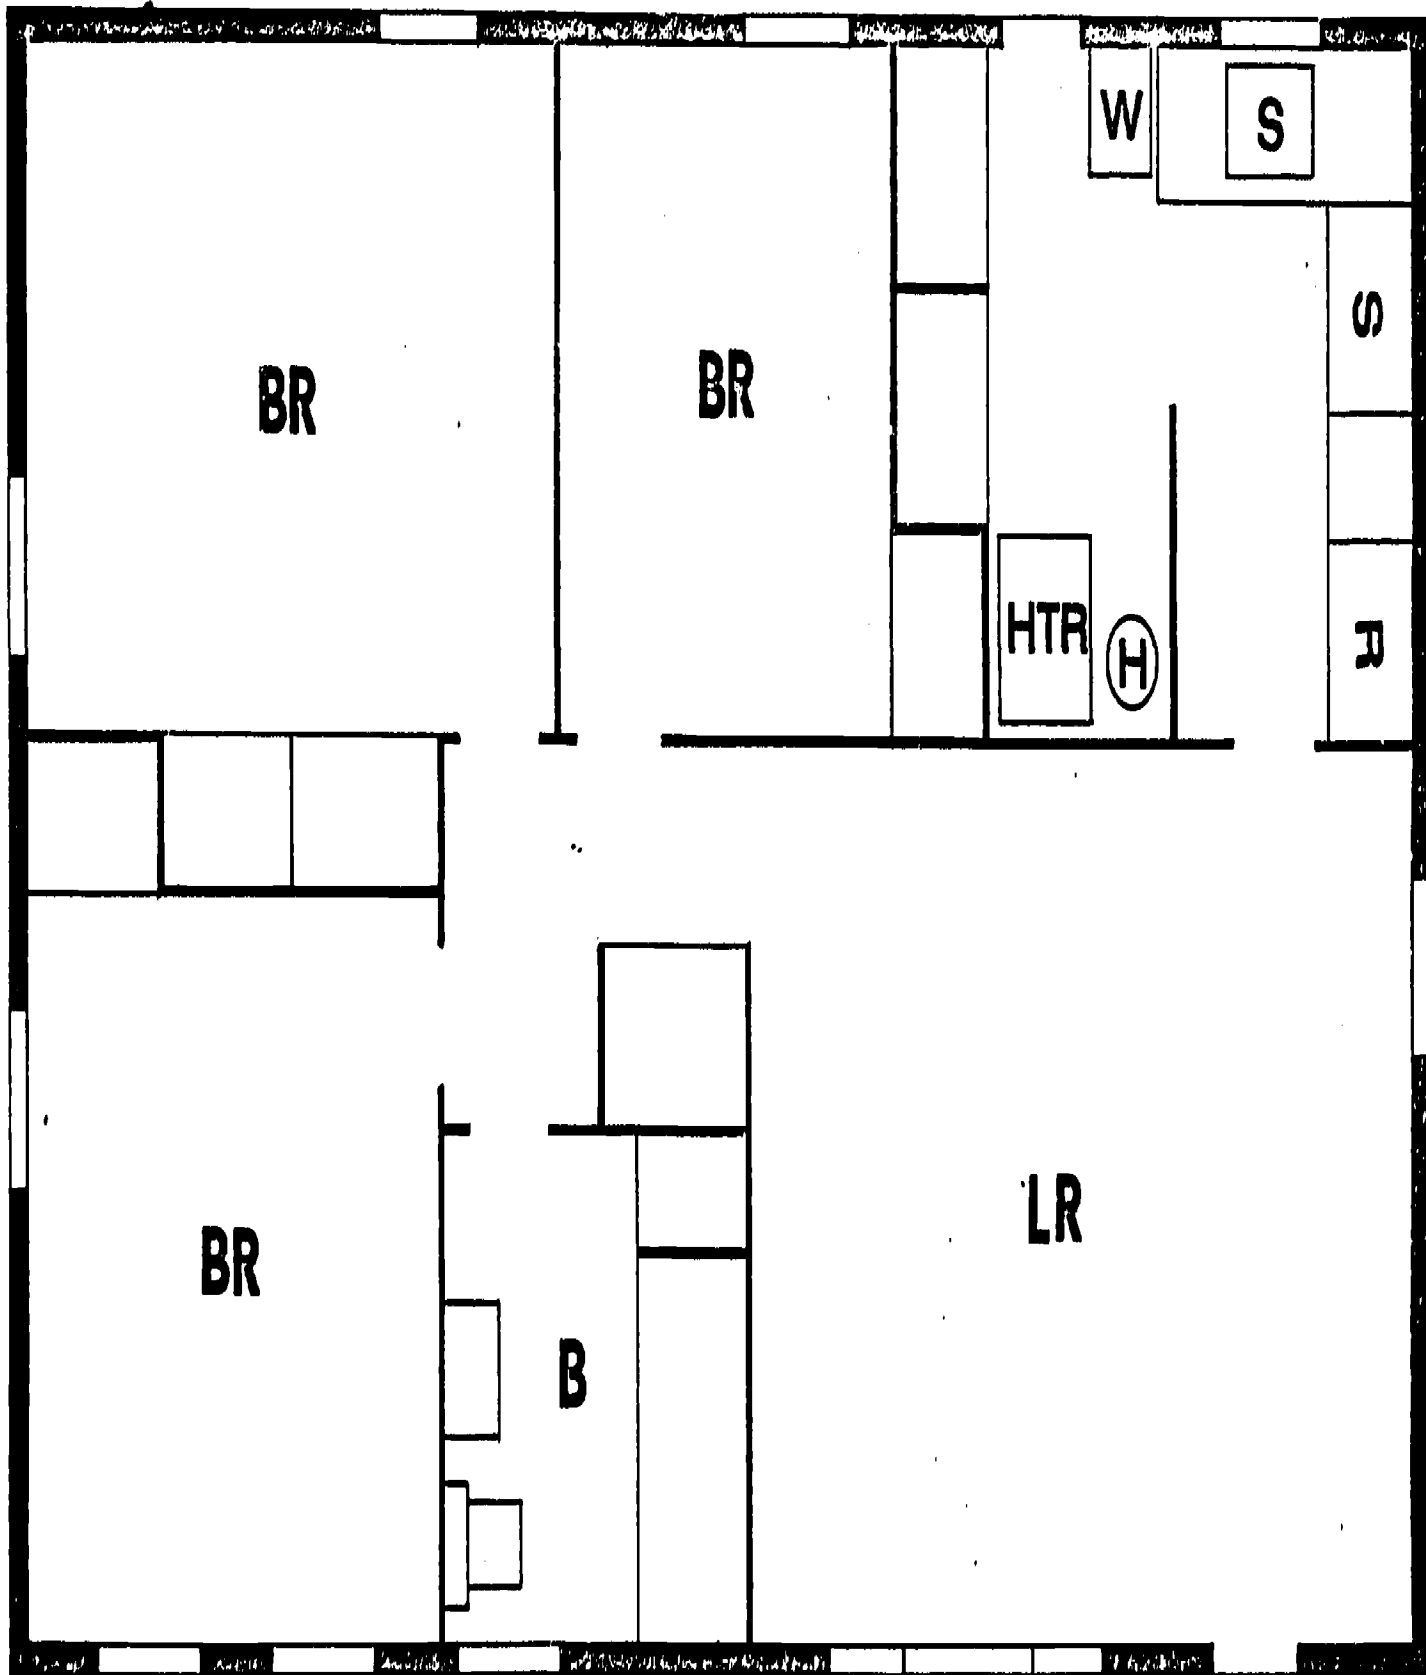

APPENDIX F SAFETY POSTERS



SAFETY PRECAUTIONS

SAFETY POSTER

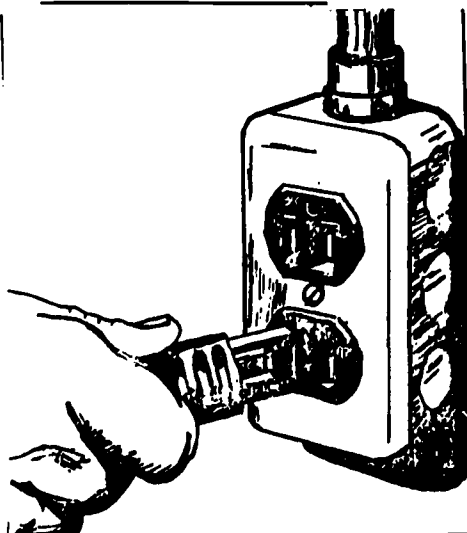

MODERN HOMES HAVE
THREE-WIRE RECEPTACLES.

NEVER CUT OFF THE
THIRD PRONG.

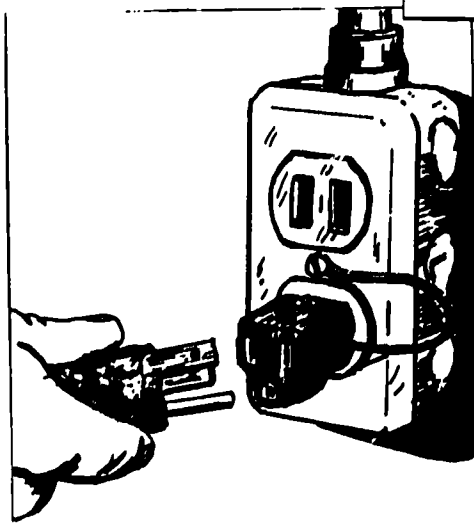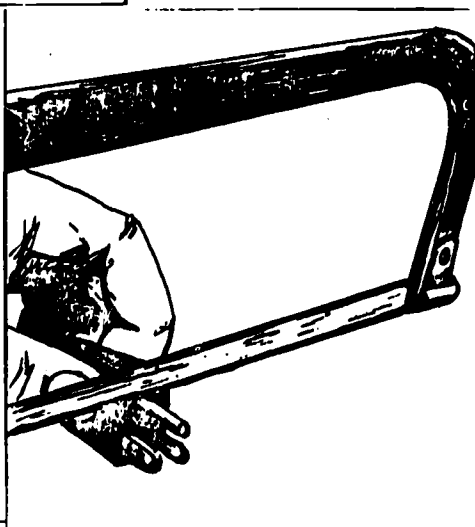


USE ADAPTER ON OLD-TYPE
RECEPTACLE.

238

SAFETY PRECAUTIONS

SAFETY POSTER

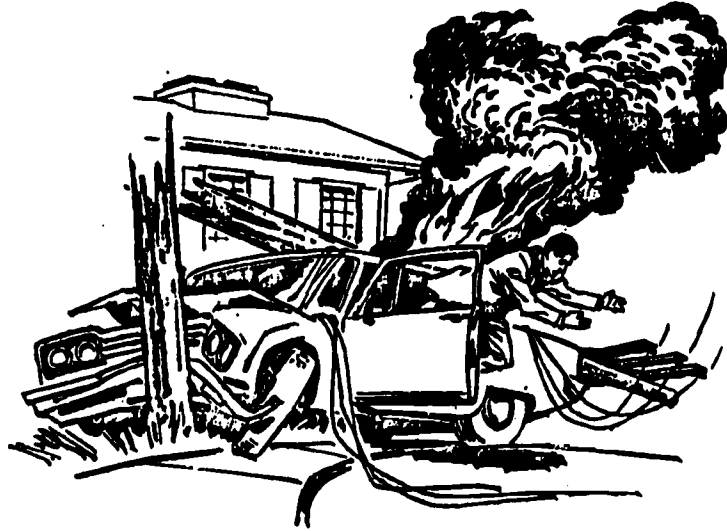

If a hot wire is in contact with a vehicle and the occupant must get out quickly, he should leap without touching the car again.



To remove a downed wire from a victim, use a non-conductor such as a long dry wooden or plastic pole or a very dry tree branch.

APPENDIX G INSTRUCTIONAL RESOURCES

240

INSTRUCTIONAL RESOURCES

ELECTRICAL WIRING-HOMEBUILDING

BOOKS AND PRINTED MATTER

1. Electric Safety - Channing L. Bete Co. Inc. - 45 Federal Street, Greenfield, Mass. 01301
2. Safe Grounding of Electrical Equipment - National Safety Council - 425 N. Michigan, Ave., Chicago, Ill. 60611
3. Simplifying Electricity - Bantam Books, Inc. - School and Marketing Division - 666 Fifth Ave., New York, N. 10019
4. Basic Mathematics for Electricity and Electronics - McGraw-Hill Book Co. - 607 Boylston St., Boston, Mass. 02116
5. Electric Power Transmission and Distribution - Clarke Irwin and Company, Limited - P. O. Box 6137, Postal Station G. Vancouver, B.C. Canada
6. What is Electricity? - Frank E. Richards Publishing Co. - 324 First St., Liverpool, N.Y. 13088
7. Handyman' Electrical Repairs Handbook - ARCO Publishing Co. Inc., 219 Park Ave., So. N.Y.
8. Principles of Electrical Theory - McGraw-Hill Book Co. - 607 Boylston St., Boston, Mass. 02116
9. Investigating Electrical Theory - McGraw-Hill Book Co. - 607 Boylston St., Boston, Mass. 02116
10. Electricidad Experimental (Spanish Language) - Regents Publishing Co. - 200 Park Ave., So., New York, N.Y. 10003
11. Experiments with Electricity - Thomas Y. Crowell Co. - 201 Park Ave., So., New York, N.Y. 10003
12. Electricity and Electronics, Basic - American Technical Society - 848 E. 58th. St., Chicago, Ill. 60637
13. Essentials of Electricity and Electronics, Third Edition - McGraw-Hill Book Co. -607 Boylston St., Boston, Mass. 02116

ELECTRICAL WIRING-HOMEBUILDING

BOOKS AND PRINTED MATTER (cont'd)

14. Basic Electricity (Programmed Instruction) - Westinghouse Learning Corporation - 100 Park Avenue, New York, N.Y. 10017
15. Fundamentals of Electricity, Volume I (Programmed Instruction) - Addison-Wesley Publishing Co., Inc. - Reading, Mass. 01867
16. Fundamentals of Electricity, Volume II (Programmed Instruction) - Addison-Wesley Publishing Co., Inc. - Reading, Mass. 01867
17. How AC and DC Circuits Work Vol. 2 (Programmed Instruction) - The Bobbs-Merrill Company, Inc.- 4300 West 62nd Street, Indianapolis, Ind. 46268
18. Understanding and Using Test Instruments (Programmed Instruction) - The Bobbs-Merrill Company, Inc. - 4300 West 62nd. St., Indianapolis, Ind. 46268
19. Teach Yourself Electricity - Dover Publications, Inc. - 180 Varick Street, New York, N.Y. 10014
20. Questions and Answers for Electricians - Howard W. Sams and Company, Inc. - 4300 West 62nd. St., Indianapolis, Ind. 46268
21. New Electric Library, 10 volumes - The Bobbs-Merrill Company, Inc. - 4300 West 62nd. St., Indianapolis, Ind. 46268
22. New Electric Science Dictionary - Howard W. Sams and Company, Inc. - 4300 West 62nd. St., Indianapolis, Ind. 46268
23. Basic Electricity, Volume 1-5 - Van Valkenburgh, Nooger and Neville, Inc. - 15.Maiden Lane, New York, N.Y. 10038
24. Basic Electricity Theory and Practice - St. Martin's Press - 175 Fifth Ave., New York, N.Y. 10010
25. Electricity - Grosset and Dunlap, Inc. - 51 Madison Ave., New York, N.Y. 10010

ELECTRICAL WIRING-HOMEBUILDING

BOOKS AND PRINTED MATTER (cont'd)

26. Experiments in Electricity, AC (Workbook) - McGraw-Hill Book Co. - 607 Boylston St., Boston, Mass. 02116
27. Guide to the National Electrical Code - The Bobbs-Merrill Company, Inc. - 4300 West 62nd. Street, Indianapolis, Ind. 46268
28. National Electrical Code and Blueprint Reading - American Technical Society - 848 E. 58th. St., Chicago, Ill. 69637
29. Practical Electric Wiring - McGraw-Hill Book Co. - 607 Boylston St., Boston, Mass. 02116
30. Electric Wiring, Theory and Practice - Barnes and Noble - 105 Fifth Avenue, New York, N.Y. 10003
31. Facility and Curriculum Guidelines - State Department of Public Instructions, Olympia, Washington

ELECTRICAL WIRING-HOMEBUILDING

FILMSTRIPS

1. Electricity for Light and Heat - Curriculum Materials Corp. - 1319 Vine Street, Philadelphia, Pa. 19107
2. Static and Current Electricity - Curriculum Materials Corp. - 1319 Vine Street, Philadelphia, Pa. 19107
3. Electric Current Measurement - McGraw-Hill Films - 8171 Redwood Highway, Novato, Calif., 94947
4. Electrical Circuits - Society for Visual Education, Inc. -1345 Diversey Parkway, Chicago, Ill 60614
5. Electric Circuits - Popular Science Publishing Co. - Audio Visual Division - 355 Lexington, Ave., New York, N.Y. 10017
6. Measurement of Resistance - Popular Science Publishing Co. - Audio Visual Division - 355 Lexington, Ave., New York, N.Y. 10017
7. Diagramming Electrical Wiring Circuits - Vocational Agricultural Service - University of Illinois - 434 Mumford Hall, Urbana, Ill. 61801
8. Electrical Terms, Their Meaning and Use - NASCO - Fort Atkinson, Wis. 53538
9. AC and DC Generators - Long FilmSlide Service - 7505 Fairmont Avenue, El Cerrito, Calif. 94530
10. AC Voltmeters and Ammeters - Long FilmSlide Service - 7505 Fairmont Avenue, El Cerrito, Calif. 94530
11. Electricity (a series of 8) - Long FilmSlide Service - 5 Fairmont Avenue, El Cerrito, Calif. 94530
12. Electricity at Work - Long FilmSlide Service - 7505 Fairmont Avenue, El Cerrito, Calif. 94530
13. Resistance - Long FilmSlide Service - 7505 Fairmont Avenue, El Cerrito, Calif. 94530
14. Transformers - Long FilmSlide Service - 7505 Fairmont Avenue, El Cerrito, Calif. 94530

ELECTRICAL WIRELESS COMMUNICATIONS

FILMSTRIPS (cont'd)

15. Magnetism, Electricity, and Machines - Bailey-Film Associates - 11559 Santa Monica Blvd., West Los Angeles, Calif. 90025
16. Safe and Sure with Electricity - Popular Science Publishing Co., Inc. - Audio-visual Div., 355 Lexington Ave., New York, N.Y. 10017

ELECTRICAL WIRING-HOMEBUILDING

ADDITIONAL FILMSTRIPS

Basic Electricity and Electronics Explained - Direct Current - Bergwall Productions, Inc., 839 Stewart Ave., Garden City, N.Y. 11530

ELECTRICAL WIRING-HOMEBUILDING

MOVIES

1. 400 Series, Basic Electricity (Super 8mm loop) - Animated Electronic Films - P.O. Box 2036, Eads Station, Arlington, Va. 22202
2. Series and Parallel Circuits (16mm reel) - Encyclopaedia Britannica Educational Corp. - 405 North Michigan Ave., Chicago, Ill. 60611
3. Electric Power Generation (16mm reel) - Serina Press - 70 Kennedy Street, Alexandria, Va. 22305
4. The World Behind Your Light Switch (16mm reel) - Serina Press - 70 Kennedy Street, Alexandria, Va. 22305
5. Connecting Wires in an Outlet Box (Super 8mm loop) - Jam Handy School Service, Inc. - 2781 East Grand Blvd., Detroit, Mich. 48211
6. Electrical House Wiring (Super 8mm loop) - Jam Handy School Service, Inc. - 2781 East Grand Blvd., Detroit, Mich. 48211
7. Installing a Convenience Outlet (Super 8mm loop) - Jam Handy School Service, Inc. - 2781 East Grand Blvd., Detroit, Mich. 48211
8. Outlet Box Installation (Super 8mm loop) - Jam Handy School Service, Inc. - 2781 East Grand Blvd., Detroit, Mich. 48211
9. Rewiring a Lamp (Super 8mm loop) - Jam Handy School Service, Inc. -2781 East Grand Blvd., Detroit, Mich. 48211
10. The Third Wire Can Save Your Life (Super 8mm loop) - Jam Handy School Service, Inc. -2781 East Grand Blvd., Detroit, Mich. 48211
11. Toggle Switch Installation (Super 8mm loop) - Jam Handy School Service, Inc. -2781 East Grand Blvd., Detroit, Mich. 48211
12. Trouble-Shooting a Bell Circuit (Super 8mm loop) - Jam Handy School Service, Inc. - 2781 East Grand Blvd., Detroit, Mich. 48211

13. Wiring a Box with Armored Cable (Super 8mm loop)- Jam Handy School Service, Inc.-2781 East Grand Blvd. Detroit, Mic. 48211
14. Wiring an Attachment Plug (Super 8mm loop)-Jam Handy School Service, Inc.-2781 East Grand Blvd., Detroit, Mich. 48211
15. Electrical Circuit Faults (16mm reel)-United States National Audiovisual Center-National Archives and Records Service-Washington, D.C. 20409
16. Electricity, Distribution (16mm reel)-Indiana University Audiovisual Center-Field Services Dept., Bloomington, Ill. 47401
17. Safety With Electricity (16mm reel)-Encyclopaedia Britannica Educational Corporation - 405 North Michigan Avenue, Chicago, Ill. 60611
18. Measurement of Electricity (16mm reel)-Coronet Films - 65 E. South Water Street, Chicago, Ill. 60601
19. Basic Electricity (16mm reel)-United States National Audiovisual Center - National Archives and Records Service, Washington, D.C. 20409
20. Basic Electricity, AC Parallel Circuits (16mm reel)-United States National Audiovisual Center, National Archives and Records Service, Washington, D.C. 20409
21. Basic Electricity, AC Series Circuits (16mm reel)-United States National Audiovisual Center, National Archives and Records Service-Washington, D.C. 20409
22. Fires and Wires (16mm reel)-Henk Newenhouse/Novo - 1825 Willow Road, Northfield, Ill. 60093
23. Danger Alive (16mm reel)-Association Films, Inc. - 600 Madison Ave., New York, N.Y. 10022
24. Electricity, Basic Wiring (16mm reel)-Universal Education and Visual Arts - 221 Park Ave. So., New York, N.Y. 10003

A wide variety of 8mm loop films on Electricity are available from the following sources:

Sterling Educational Films
241 East 34th Street
New York, N.Y. 10016

Schoolmasters Science
745 State Circle
Ann Arbor, Michigan 48104

CENCO Educational Aids
2600 S. Kostner Ave.
Chicago, Ill. 60623

Rand McNally and Co.
405 Park Ave.
New York, N.Y. 10022

TRANSPARENCIES

1. Electric Circuit - United Transparencies, Inc. - P.O. Box 688, Binghamton, N.Y. 13902
2. Electric Circuit - DCA Educational Products, Inc.-4865 Stenton Ave., Philadelphia, Pa. 19144
3. Inductance - DCA Educational Products, Inc.-4865 Stenton Ave., Philadelphia, Pa. 19144
4. Production of Alternating and Direct Current - United Transparencies, Inc. - P.O. Box 688, Binghamton, N.Y. 13902
5. Generator - NASCO - Fort Atkinson, Wis. 53538
6. Simple Electric Generator-United Transparencies, Inc.-P.O. Box 688, Binghamton, N.Y. 13902
7. Electric Meter-CCM School Materials, Inc.-2124 West 82nd Place, Chicago, Ill. 60620
8. Power Supply - United Transparencies, Inc.-P.O. Box 688, Binghamton, N.Y. 13902
9. Electrical Charges-DCA Educational Products, Inc.-4865 Stenton Ave., Philadelphia, Pa. 19144
10. Electrical Distribution-CCM School Materials, Inc.-2124 West 82nd Place, Chicago, Ill. 60620
11. Understanding Electricity and Electronics, A Series-McGraw-Hill Films - 8171 Redwood Highway, Novato, California 94947
12. Electric Meters and Resistance-3M Company - Visual Products Division, St. Paul, Minn. 55101
13. Electrical Safety (21 parts) - Popular Science Publishing Co.-Audio Visual Division - 355 Lexington Ave. New York, N. Y. 10017
14. Electrical Circuits, Switches - A. J. Nystrom and Co. - 3333 Elston Avenue, Chicago, Ill. 60618
15. Basic Wiring - 3M Company - Visual Products Division - St. Paul, Minn. 55101
16. Circuits, In Series and Parallel-Creative Visuals - Box 1911, Big Spring, Texas 79720

ELECTRICAL WIRING-HOMEBUILDING

TRANSPARENCIES (cont'd)

A wide variety of transparencies on Electricity are available from the following sources:

GAF Corporation Reprographic Products
140 West 51st Street
New York, N. Y. 10020

CENCO Educational Aids
2600 S. Kostner Avenue
Chicago, Illinois 60623

McGraw-Hill Films
8171 Redwood Highway
Novato, California 94947

DCA Educational Products, Inc.
4865 Stenton Avenue
Philadelphia, PA 19144

Stansi Scientific Division
1231 North Honore Street
Chicago, Illinois 60622

CCM School Materials, Inc.
2124 West 82nd Place
Chicago, Illinois 60620

Eye Gate House, Inc.
146-01 Archer Avenue
Jamaica, N. Y. 11435

George F. Cram Company, Inc.
School and Library Division
P. O. Box 426
Indianapolis, Indiana 46206

Tweedy Transparencies
208 Hollywood Avenue
East Orange, N. J. 07018

ELECTRICAL WIRING - HOMEBUILDING

LIST OF TOOLS AND SUPPLIES

ELECTRICAL WIRING - HOMEBUILDING

ELECTRICAL WIRING TOOLS

Claw hammers
Electrical drills (With wood and masonry bits)
Hacksaws
Keyhole saws
Needle nose pliers
Lineman's pliers
Vise-grip pliers
Wire cutters/strippers
Diagonal pliers
Screwdrivers
Wood chisels
Cold chisels
Conduit benders
Folding rules, 6 foot
Cable rippers
Utility knives
Fish tape and reel
Test lights
Pipe remers
Pipe threaders
Pipe cutters
Wire gauges
Soldering irons (electrically heated)
Soldering irons (torch heated)

SUPPLIES AND ACCESSORIES

Solder (50/50)
Soldering flux
Vinyl electrician's tape
Transformer models or cut-aways
AC current source

WIRING DEVICES AND SUPPLIES

Thin-wall conduit
Rigid conduit
Conduit, flexible metal (Greenfield)
Soldering lugs
Solderless connectors
Cable (non-metallic sheathed) connectors
Armored cable bushings and connectors
Conduit connectors
Conduit and cable clamps
Service weather heads
Ground electrodes
Ground clamps
Outlet boxes with covers
Receptacle boxes with covers
Meter sockets
Single-pole switches with plates
Three-way switches with plates
Duplex receptacles with covers
Two-circuit receptacles
Porcelain lamp fixtures with pull chain
Porcelain lamp fixtures (wall switch operated)
Lighting fixtures (wall and ceiling mounted)
115/230 volt receptacles (30 and 50 ampere rated)
Appliance pigtails
Push buttons
Signalling devices (bell or buzzer)
Low voltage transformers

ELECTRICAL WIRING - HOMEBUILDING

OVERCURRENT FIXTURES AND DEVICES

Fuse panels (or circuit breaker panels) 60 ampere
Fuse panels (or circuit breaker panels) 100 ampere
Fuse panels (or circuit breaker panels) 200 ampere
Meter socket and fuse panel combinations, 100 and 200 ampere
Single element fuses, Edison plug type 15, 20, 30 ampere
Time delay fuses, Edison plug type 15, 20, 30 ampere
Time delay fuses, cartridge type 36 to 60, 70, to 100, 110 to 200 amperes
Circuit breakers, single and 2-pole 15, 20, 30, 40, 60, 100 ampere

CONDUCTORS

Single conductor copper wire, insulated (10 gauge or smaller)
Single conductor copper wire, uninsulated (10 gauge or smaller)
Bell wire
Ground wire, uninsulated (No. 4, No. 6)
Armored cable, type ACT 10, 12, 14
Nonmetallic Sheathed Cable, Type NM, Type NMC
10-2, 12-2, 14-2, 10-2 w/ground, 12-2 w/ground, 14-2 w/ground
Wire, Type TW 12, 14
Cord, Type S 12-3
Cable, Type RHW 6-3

METERS

Kilowatthour meters	Amprobe
Milliammeters	Digital meters
AC Voltmeters	Galvanometer
AC Ammeters	
Ohmmeters	
Megohmmeters	
Light meters (foot candle meters)	

ELECTRICAL WIRING - HOMEBUILDING

NOTE: In addition to the previously listed equipment and supplies, the following instructional aids are recommended as possible additions to any course in electrical wiring derived from this curriculum. No attempt has been made to evaluate the relative merit of the following items; consequently, they should be examined for appropriateness prior to purchase.

MOTOR AND GENERATOR DEMONSTRATION KIT
COPPER VOLTAMETER (Couleometer)
AMPERE'S FRAME APPARATUS
AMPERE'S LAW STAND, MOUNTED CONDUCTOR
DYNAMO ANALYSIS APPARATUS
LAWS OF RESISTANCE BOARD
TEMPERATURE COEFFICIENT OF RESISTANCE APPARATUS
DISSECTABLE TRANSFORMER
PHASE DEMONSTRATOR

Available from CENCO Educational Aids
2600 S. Kostner Ave.
Chicago, Ill. 60623

LINE DROP APPARATUS
Available from STANSI Scientific Division
1231 North Honore Street
Chicago, Ill. 60622

J-e EXPERIMENTER
3-e EXPERIMENTER MARK II
McKNIGHT POWER EXPERIMENTER
Available from McKnight & McKnight
Publishing Co., Bloomington, Ill.
61701

STUDENT LABORATORY PROGRAM, ELECTRICITY
AND MAGNETISM
Available from SILVER BURDETTE Co.
Box 362
Morristown, N. J. 07960

ELECTRICAL CIRCUIT MODEL
Available from DENOYER-GEPPERT Co.
5235 Ravenswood Ave.
Chicago, Ill. 60640

CURRENT BALANCE
Available from EDUQUIP INC.
1220 Adams Street
Boston, Mass. 02124

BIBLIOGRAPHY

270

BIBLIOGRAPHY

1. Alabama, State Department of Education and USOE, Electrical Wiring - Homebuilding, Initial. Link Educational Laboratories, Montgomery, Alabama, 1974.
2. Alabama, State Department of Education and USOE, Electrical Wiring - Homebuilding Intermediate. Link Educational Laboratories, Montgomery, Alabama, 1974.
3. Alabama, State Department of Education and USOE, Electrical Wiring - Homebuilding, Final. Link Educational Laboratories, Montgomery, Alabama, 1974.
4. Alabama, State Department of Education and USOE, Electrical Wiring - Homebuilding Instructional Resources. Link Educational Laboratories, Montgomery, Alabama, 1974.
5. Alerich, Walter N. Electrical Construction Wiring. Chicago, Illinois, American Technical Society, 1971.
6. Anderson, Edwin P., Home Appliance Servicing. Howard W. Sams & Co., third ed., Indianapolis, Indiana, 1976.
7. Baker, Gus E. and Crow, Leonard R. Electricity Fundamentals. Indianapolis, Indiana, Howard W. Sams and Co., Inc., 1971.
8. Colvin, Thomas S. Electrical Wiring Residential, Utility Buildings and Service Areas. AAVIM, Athens, Georgia, 1979.
9. Delmar Publishers, Inc., Related Information Electricity I. Albany, New York: Delmar Publishers Inc., 1962.
10. Delmar Publishers Inc., Related Information Electricity II. Albany, New York: Delmar Publishers, Inc., 1962.
11. Hawaii, Department of Education, Industrial Education Curriculum Guide. Honolulu, Hawaii, Department of Education, 1971.
12. Jacobs, Clinton O. and Turner, J. Howard. Developing Shop Safety Skills. AAVIM, Athens, Georgia, 1979.
13. Lemons, Wayne and Price, Bill. Major Appliance Repair Guide. Tab Books, Blue Ridge Summit, Pa. 1971.
14. Lemons, Wayne and Montgomery, Glen. Small Appliance Repair Guide Vol. 1. Tab Books, Blue Ridge Summit, Pa. 1975.
15. Masterton, Robert N. Student Guide for Electrical Construction Wiring. American Technical Society, Chicago, Illinois, 1975.

16. Mileaf, Harry. Electricity One-Seven. Hayden Book Co., Inc., Rochelle Park, New Jersey, 1966.
17. Mix, Floyd M. House Wiring Simplified. South Holland, Ill.: The Goodheart-Willcox Co., Inc., 1977.
18. National Fire Protection Association, National Electrical Code. Boston, Mass: National Fire Protection Association, 1978.
19. Ohio Trade and Industrial Education Service, Residential Wiring Learner's Manual. The Ohio State University, 1963.
20. Ohio Trade and Industrial Education Service, Basic Electricity Instructor's Manual. State Department of Education, Columbus, Ohio, 1964.
21. Oklahoma, State Department of Vocational and Technical Education, Basic Electricity. Stillwater, Oklahoma.

GLOSSARY

273

GLOSSARY

1. Alternating current: (AC) The term meaning that the current reverses at regular intervals.
2. Ampacity: Current carrying capacity of electric conductors expressed in amperes.
3. Approved: Acceptable to the authority having jurisdiction.
4. Cable: Two or more conductors put together inside an overall covering usually moisture or flame retardant.
5. Circuit: A complete path through which electricity flows, such as from the power source to a lamp, through the lamp, and back to the power source.
6. Circuit breaker: A safety device which opens the circuit by tripping a switch rather than burning.
7. Conductor: The wires which carry the electricity or through which electricity flows.
8. Conduit: A metal or fiber pipe or tube used to enclose electrical conductors.
9. Cord: Several small wires wrapped in insulation, then covered with another layer of insulation. Usually referred to as extension cords or lamp cords.
10. Device: A unit of an electrical system which is intended to carry but not utilize electric energy. i.e. switches, plugs, fuses.
11. Direct current: (DC) The term meaning that the current flows in one direction at a continuous rate.
12. Electricity: A source of energy that can be easily converted into light, heat, or power.

13. Equipment: A general term including materials, fittings, devices, appliances, fixtures, apparatus, and the like used as a part of, or in connection with, an electrical installation.
14. Fish tape: A flat spring steel wire used to pull "fish" wires through conduits or walls
15. Fitting: Accessory such as a bushing, or lock-nut used on wiring system intended primarily to perform mechanical rather than electrical function.
16. Fuse: A safety device which burns out when the current becomes too great.
17. Hot wires: A current carrying conductor with electrical pressure on them.
18. Insulation: A protective covering over wires to prevent completing a circuit except where desired.
19. Junction box: An outlet box with a blank cover used to contain splices of a circuit.
20. Knockout: Circular metal die-cut impression in outlet and switch boxes, not completely severed, which may be removed to accommodate wiring.
21. Outlet: A point on the wiring system at which current is taken to supply utilization equipment. i.e. lighting outlet, receptacle outlets
22. Overload: Current demand which is greater than that for which the circuit or equipment was designed.
23. Qualified person: Person who is thoroughly familiar with construction and operation of apparatus and hazards involved.
24. Romex: Nonmetallic sheathed cable used for indoor wiring.
25. Schematic diagram: Step used in electrical wiring showing the connections that needs to be made and usually used to trace flow of current when troubleshooting.

- | | |
|----------------------|--|
| 26. Screw terminal: | Means for connecting wiring to devices, which makes use of a threaded screw. |
| 27. Short circuit: | An improper connection between hot and neutral wires or between hot wires. |
| 28. Single phase: | A type of electric service usually available to most residential dwellings requiring one transformer between power supplier and customers. |
| 29. Skinning (wire): | Removing insulation |
| 30. Splice: | Connection made by connecting two or more wires. |
| 31. Switch: | A device used to open or close a circuit |
| 32. Voltage drop: | A loss in electrical pressure from its source to its point of use. |
| 33. Wire: | A single conductor which carries electricity. |
| 34. Wire gauge: | A tool used to measure wire diameter |
| 35. Wire size: | The measure of a wire diameter. |